


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION


© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	REVISIONS	DATE	APPD
6	14							
						REVISED & REDRAWN PER 0720-0303-93	8-30-93	gph BB

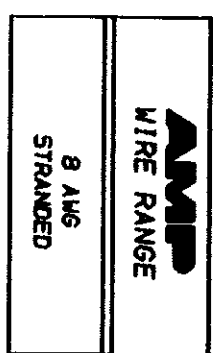

METRIC
DIMENSIONS LISTED IN mm [INCHES]

- NOTE:
1. WIRE INSULATION DIA "A" 6.48[.255] MAX
 2. WIRE INSULATION DIA "B" 8.51[.335] MAX

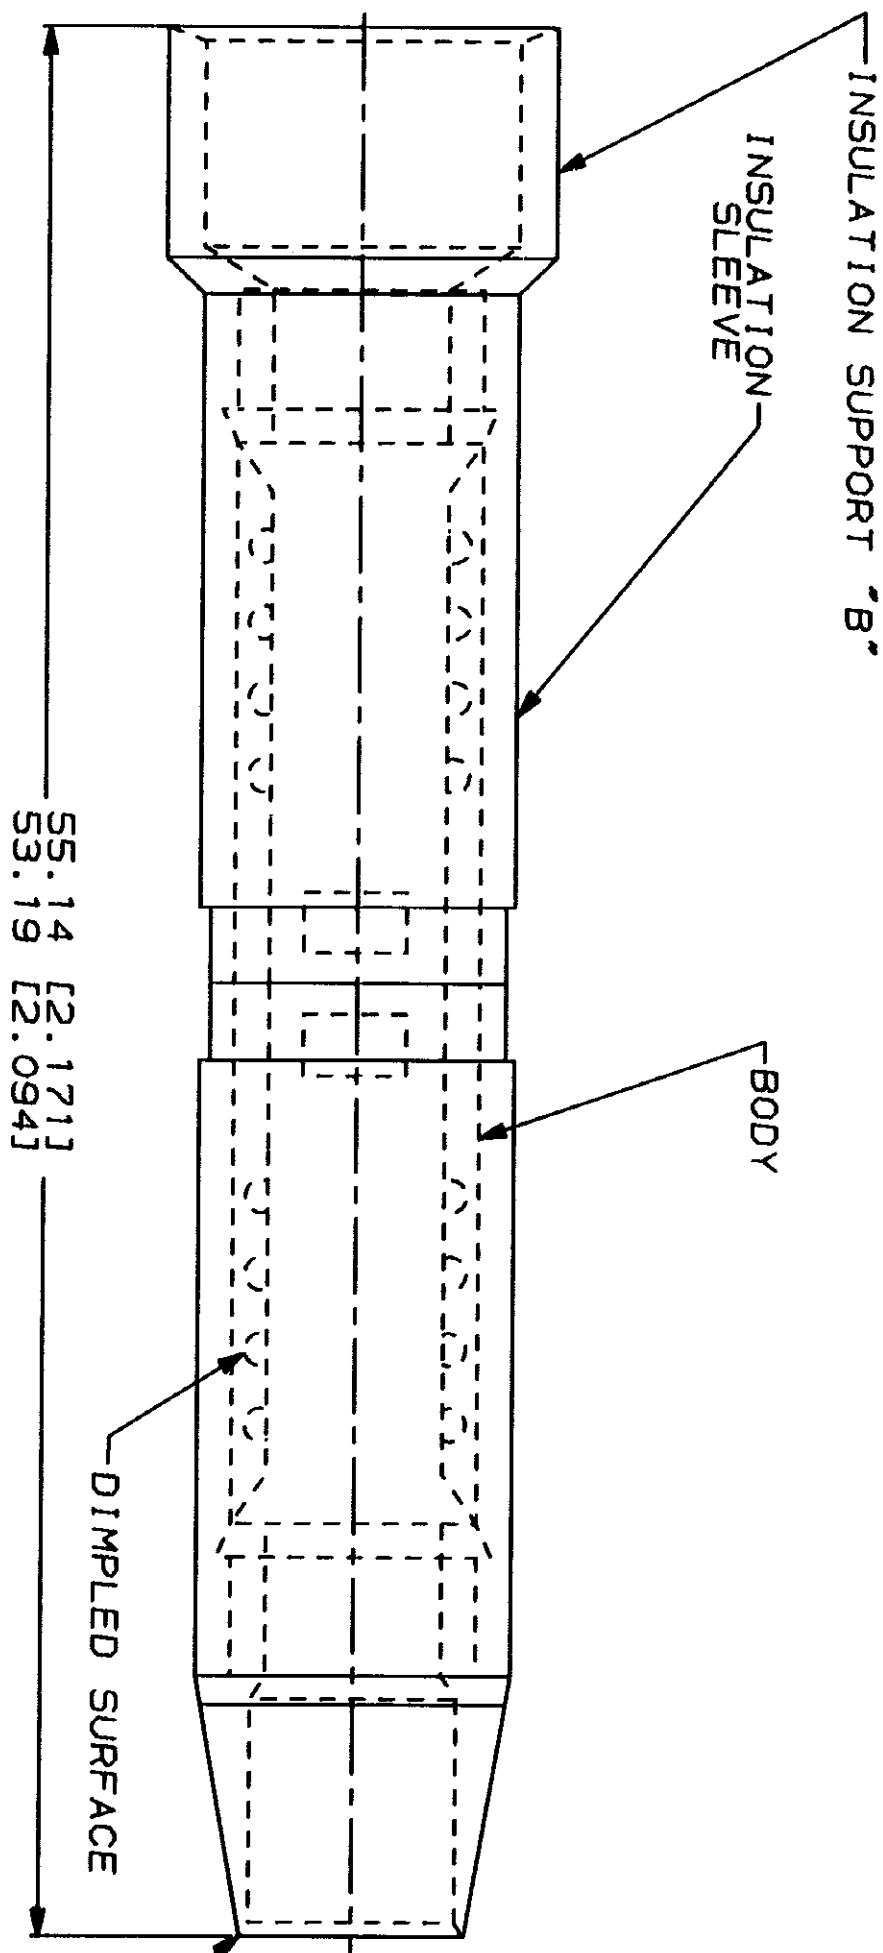

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. UNLESS SPECIFIED TOLERANCES ON: 2 PLG DEC # 0.20(.008) 3 PLG DEC # - ANGLES # -		DR 8-30-93 S.S. GULLEN		QTY 100		LOOSE PC		324658	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 600 V MAX		MATERIAL COPPER PER ASTM B-152 MILON, COLOR RED		CHK 8-30-93 R. HERBERY		NAME		AMP Incorporated Harrisburg, PA 17105-3608	
FOR APPLICATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 6.64-10.54mm² (13,100-20,800)		FINISH TIN PLATE PER MIL-T-10727		APPRO 8-30-93 B. BLIS		SPLICE, BUTT, SINGLE TO MULTIPLE, TERMINAL, WIRE SIZE: 8 AWG		SIZE B 00779	
TOOLING INFORMATION		1-800-526-5142		STRANDED		APPLICATION SPEC		APPRO 8-30-93		DRAWING NO C-324658		SHEET 1 OF 1	
FOR ORDER ENTRY				THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE COMPANY HAS NO RESPONSIBILITY FOR REVISIONS OR CORRECTIONS FOR THE CURRENT EDITION.		WEIGHT -		SCALE NTS		CUSTOMER DRAWING			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[324658](#)