



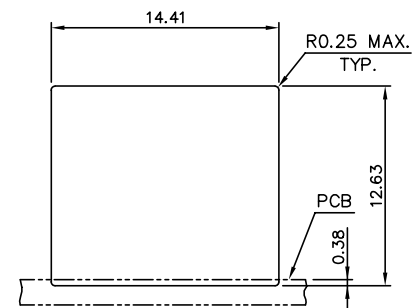

RECOMMENDED PANEL CUT-OUT

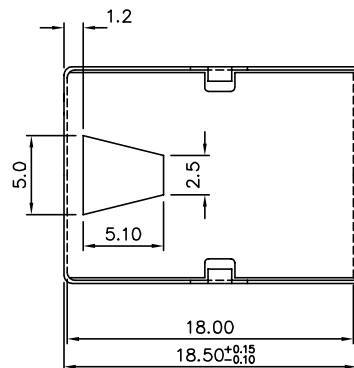


PRODUCT NO	NUMBER OF POS.	LOADED POSITION	HSG COLOR	PLATING
61885-0661	6	ALL POS.	BLACK	5u" Au + high performance lubricant
61885-0641		2,3,4,5		
61885-0621		3,4		
61885-0661LF		ALL POS.		
61885-0641LF		2,3,4,5		
61885-0621LF		3,4		




LEAD FREE PRODUCT NO.

NOTES:


1. RECOMMENDED P.C.B. THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, COLOR: SEE TABLE
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø 0.460 ROUND WIRE, PLATING SEE TABLE.
- ④ METAL SHELL MATERIAL:
COPPER ALLOY, 0.20MM THICK.
FINISH: FOR 61885-XXXX TIN-LEAD 100 u" THICK .
FOR 61885-XXXXLF PURE TIN 80 u" THICK .
5. PACKAGING PER GES-14-361, USING TUBE
6. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED INS GS-22-008
7. IF LF P/N THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD
8. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION

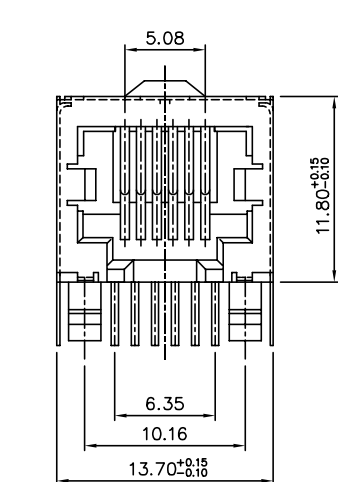

RECOMMENDED P.C.B. LAOUT

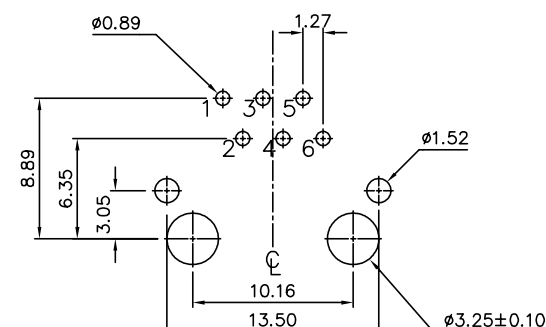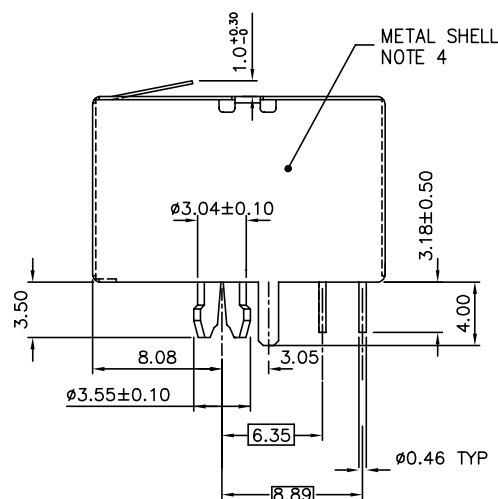

POS. NO. CONFIGURATION



mat'l. code	surface ISO1302	tolerance ISO1101 ISO406	projection mm	product family MOD JACK
l'recn nodr	date	tolerances unless otherwise specified	mm	title
C T80510 MW 11/18/98	angle	0.X±0.3	mm	LOW PROFILE PCB III 6 POS
D T03-0443 WL 10/06/03	0°±2'	0.XX±0.15	scale 2.0	MOD JACK, FULLY SHIELDED
E N04-0125 YS 12/15/04	0°±2'	0.XXX±0.05	scale 2.0	dwg no
F ELX-N-011021 SH MM 03/25/12	dr	C M HSU 03/27/97	engr TONY CHIEN 03/27/97	sheet 1 of 1 size
		chr TONY CHIEN 03/27/97	appd JENN TSAO 03/27/97	61885 A4
sheet	revision	F		type Product Customer Drawing
index	sheet	1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[61885-0621LF](#) [61885-0661LF](#)