

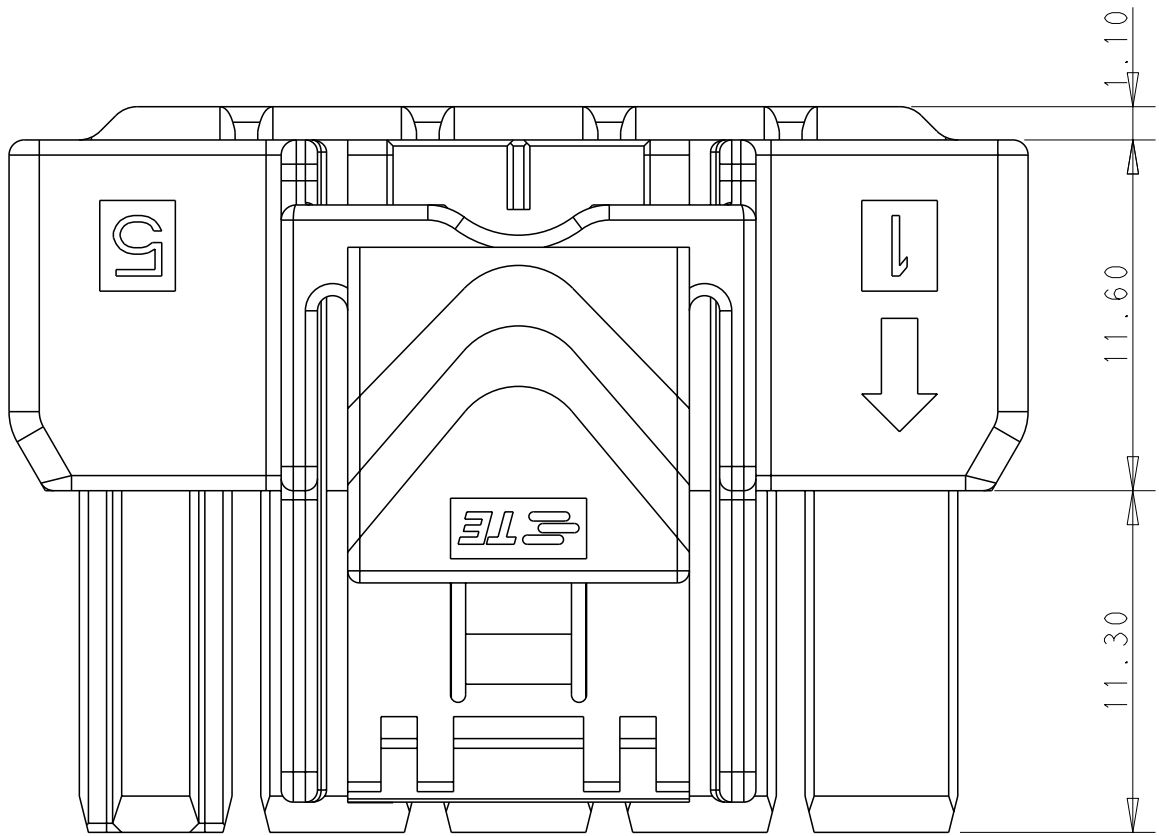
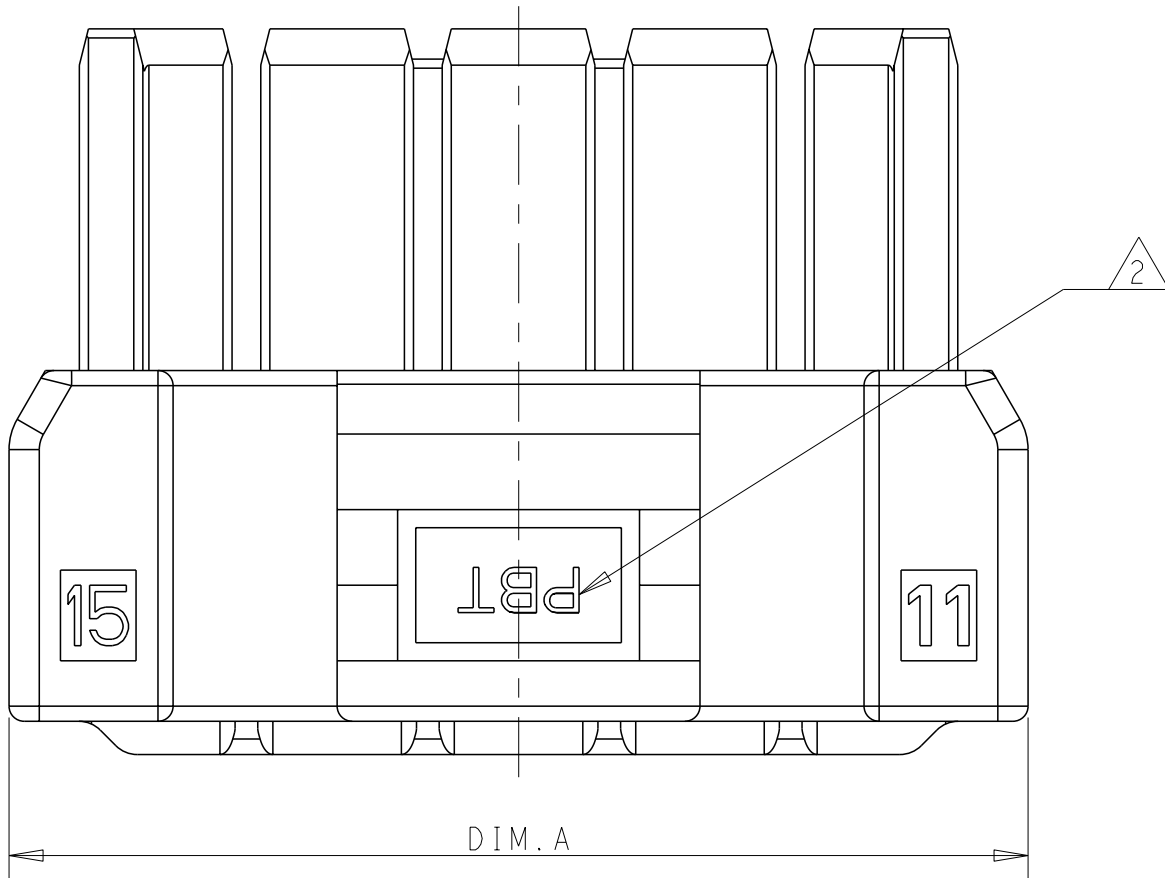
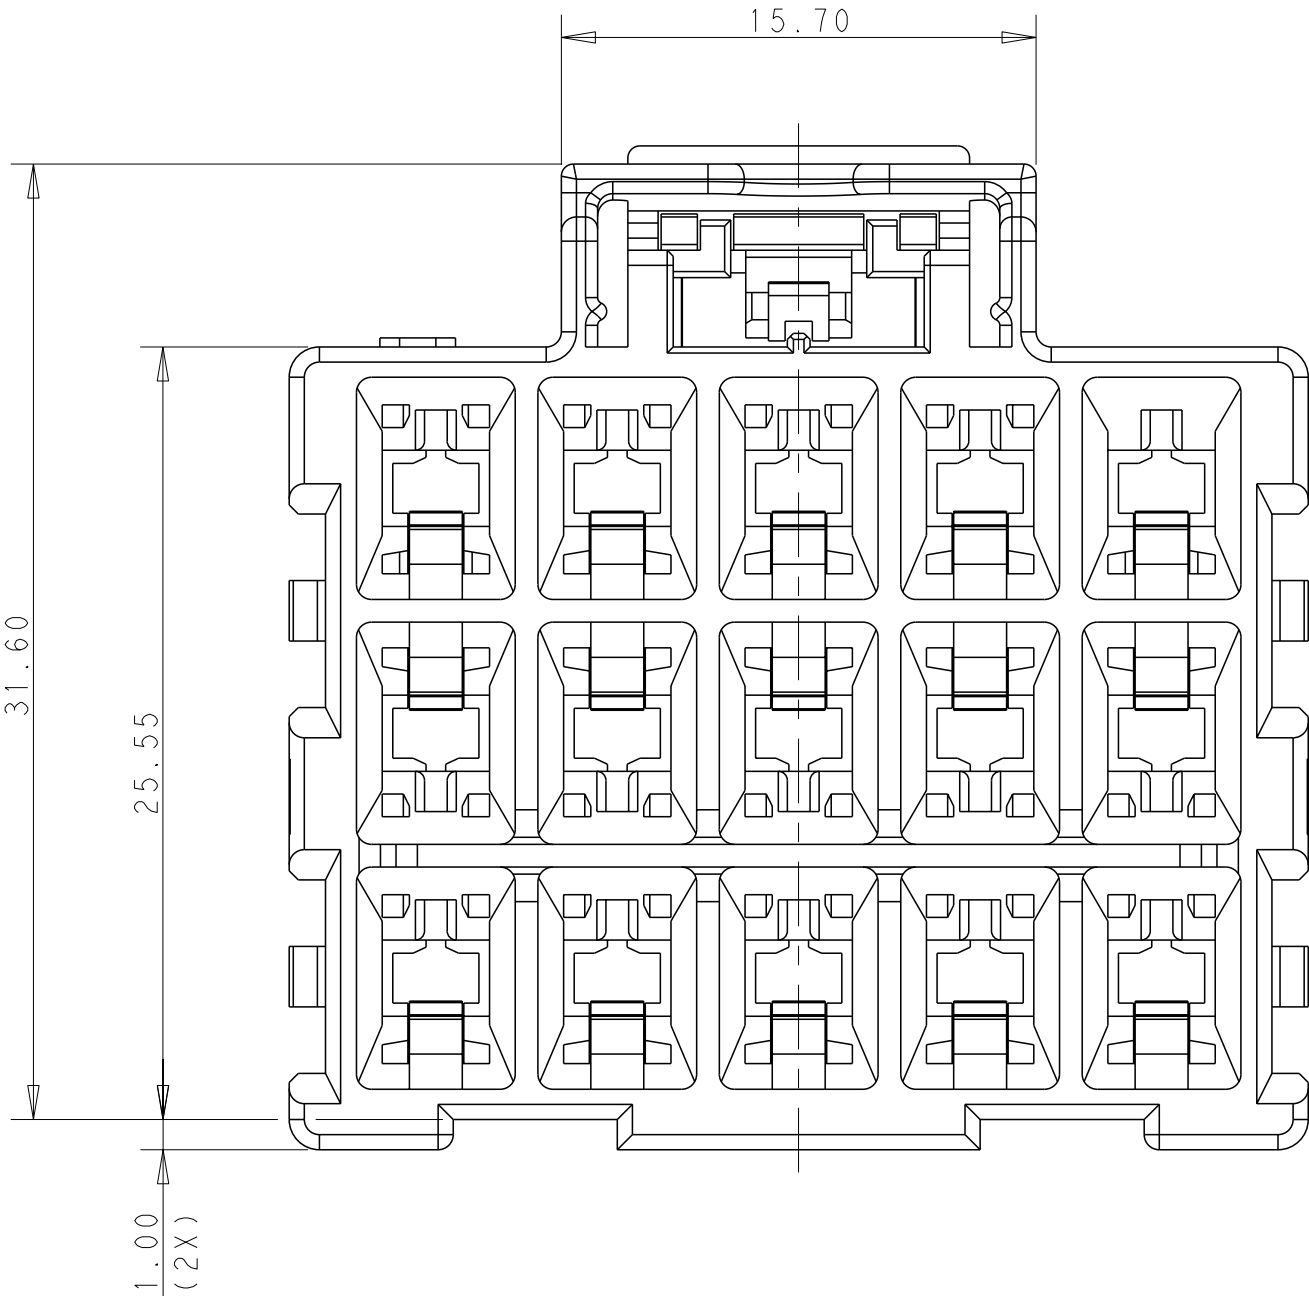


REVISIONS					
#	LYR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECO-16-009784	20JUN16	RS	GJ

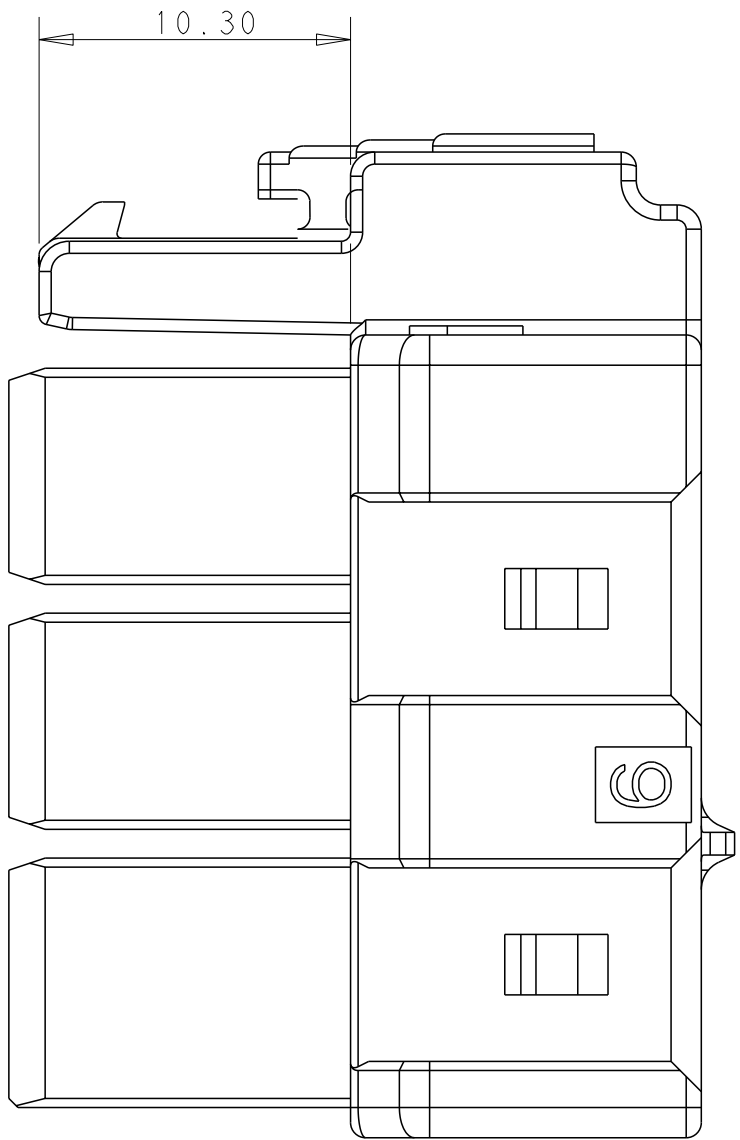

POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

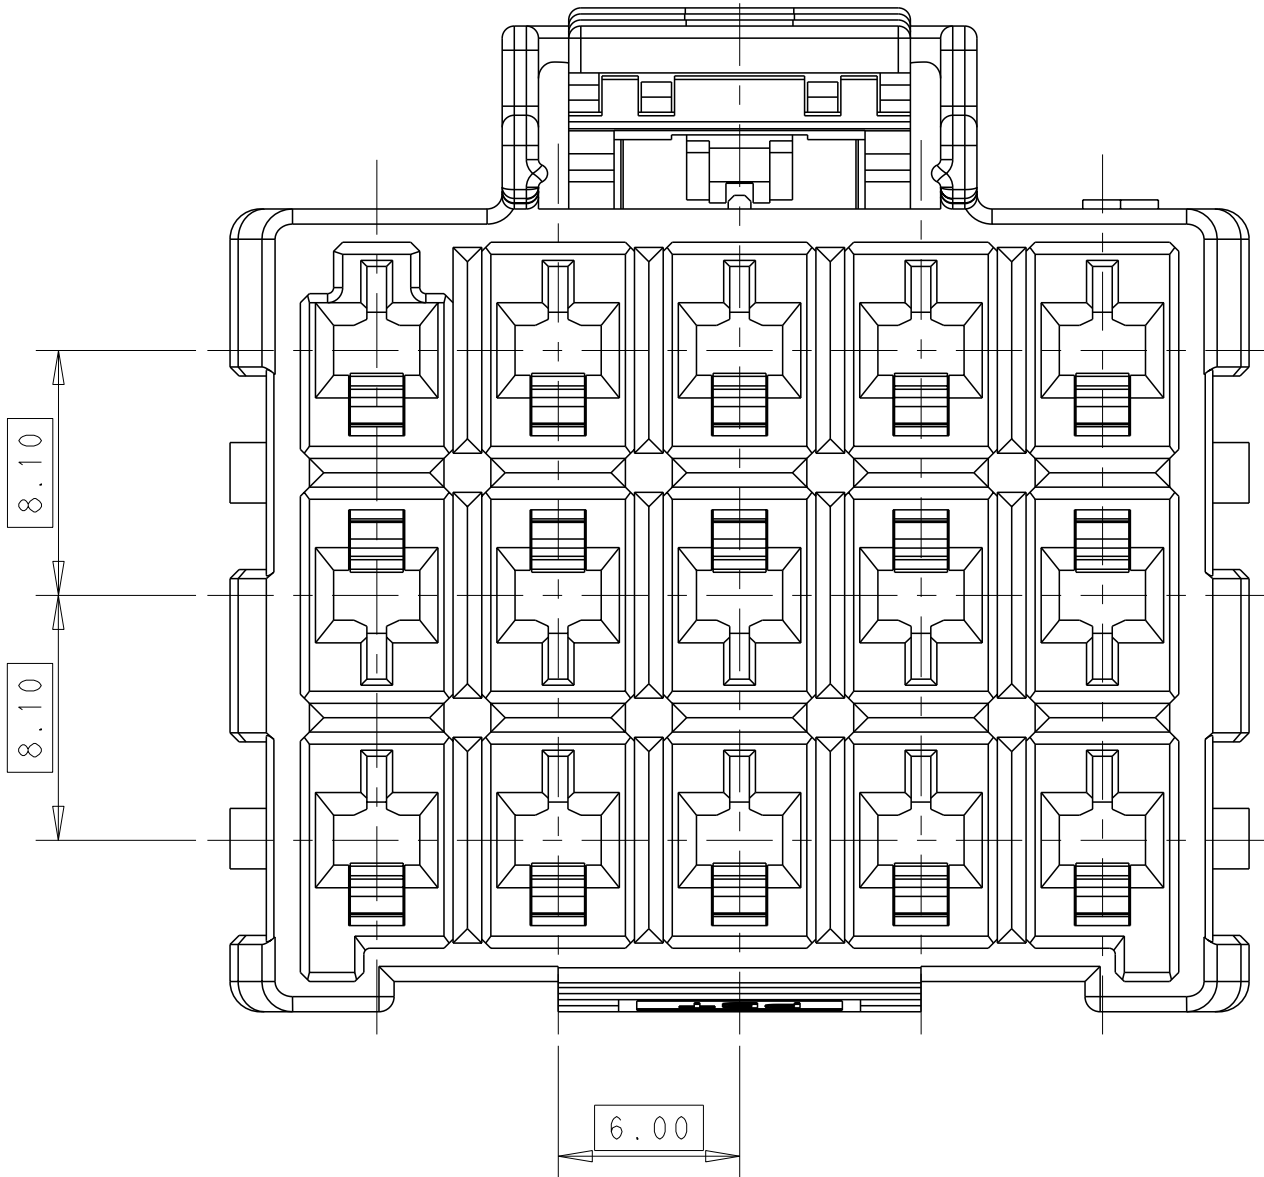

- 1

MATERIAL:
LEVEL 1:PBT,STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON,HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2

MATERIAL MARK:
LEVEL 1:PBT,LEVEL 2:HDT
- 3





APPLICABLE CONTACT P/N
RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*
- 4

MATING CONN. P/N
CAP HSG:*-1971874/5-*,
DOUBLE ROW LOCK PLATE:*-1971778-*;SINGLE ROW LOCK PLATE:*-1971777-*


5 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	TE TE Connectivity PLUG HOUSING,TRIPLE ROW POWER TRIPLE LOCK					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.35 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH - -	CHK HAPYE WU 09JUL2012						
		APVD YUZHONG MAO 09JUL2012						
	MATERIAL 1	PRODUCT SPEC 108-106118						
		APPLICATION SPEC 114-106118						
		WEIGHT -	SIZE A1	CAGE CODE 00779	DRAWING NO 1971876	RESTRICTED TO -		
		Customer Drawing		SCALE 3:1	SHEET 1	OF 2	REV D	


REVISIONS				
P	LYR	DESCRIPTION	DATE	OWN
-	-	SEE SHEET 1	-	-

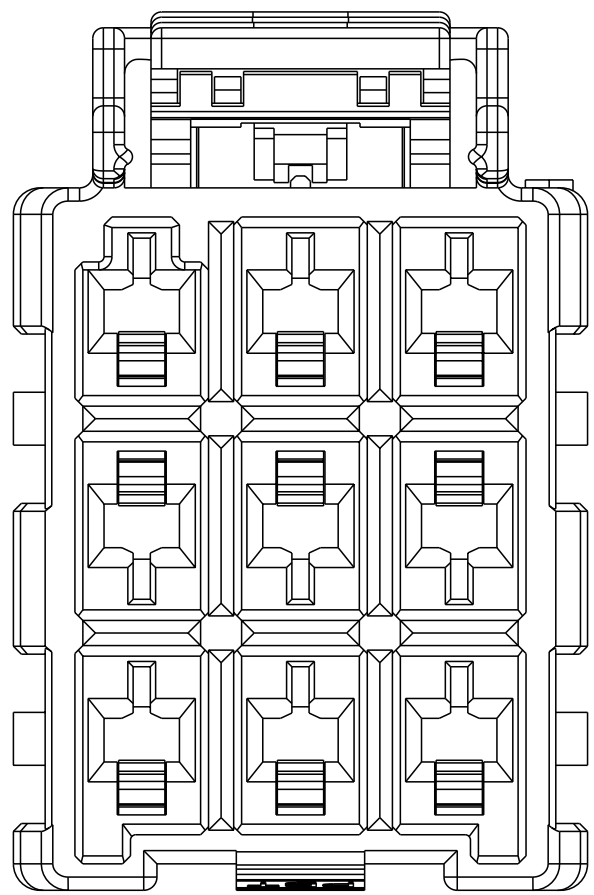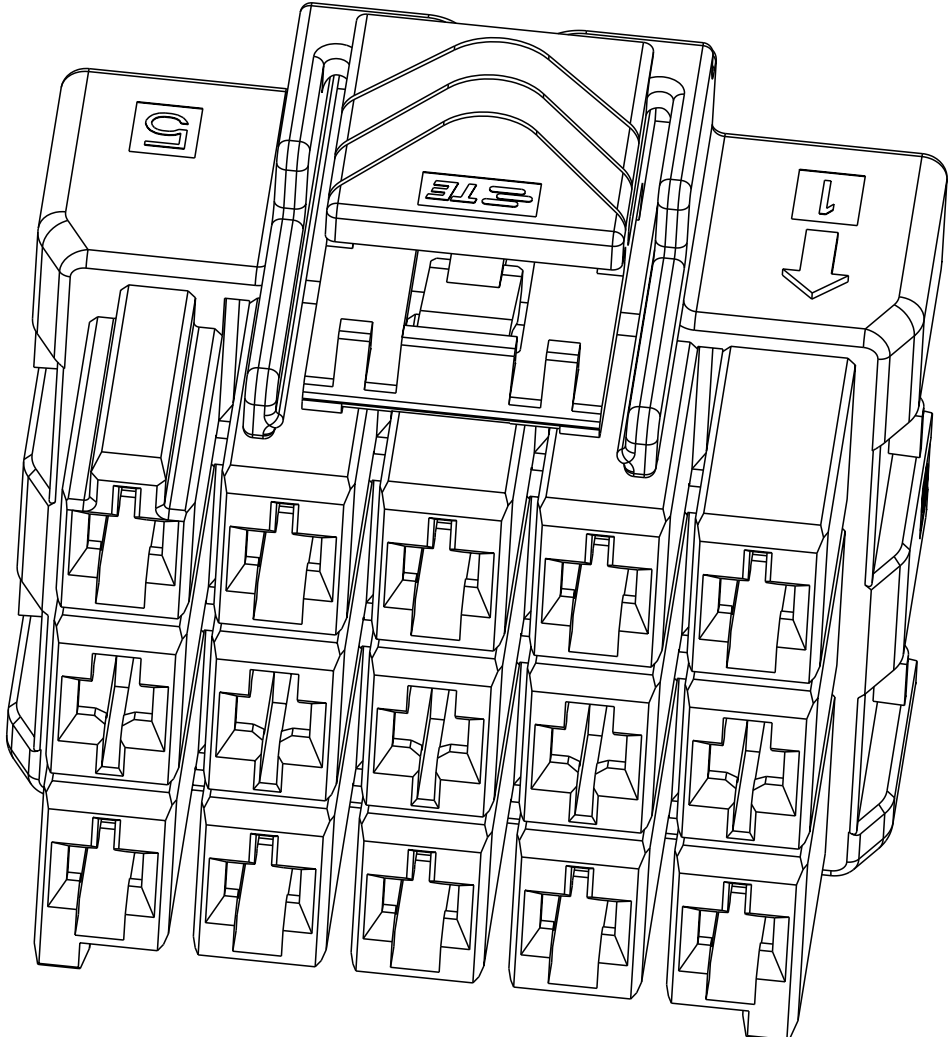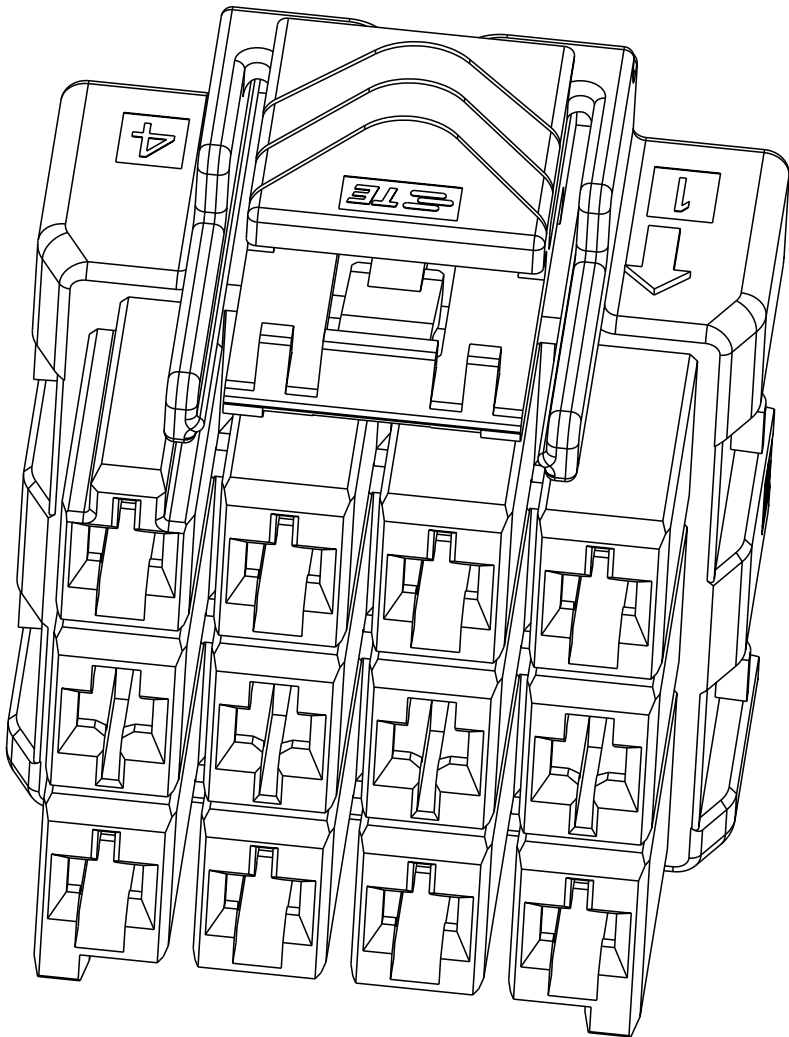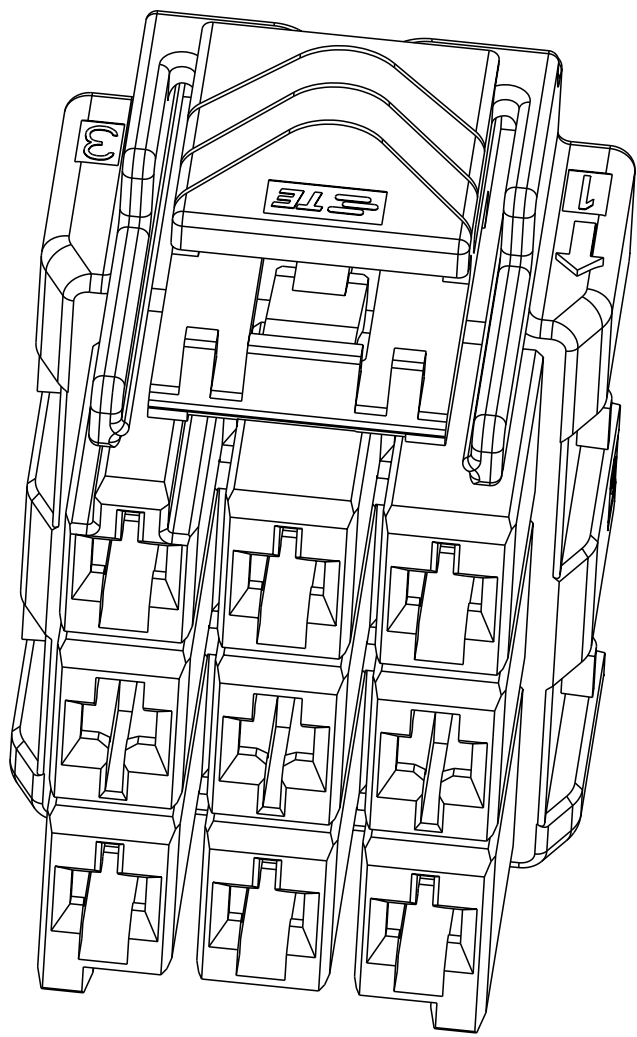

3*3 POSITIONS

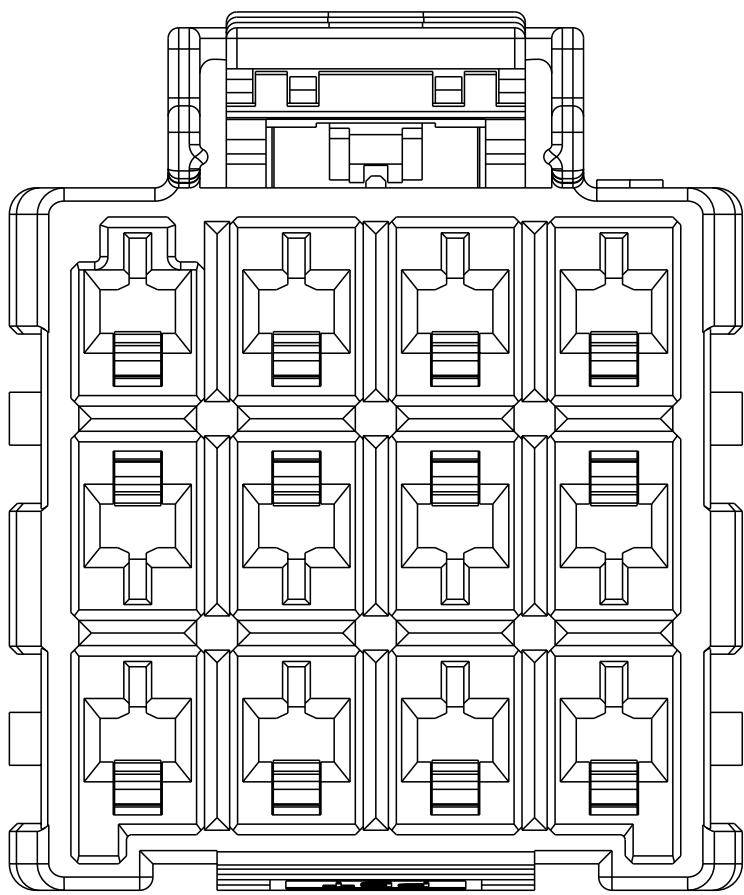


3*4 POSITIONS

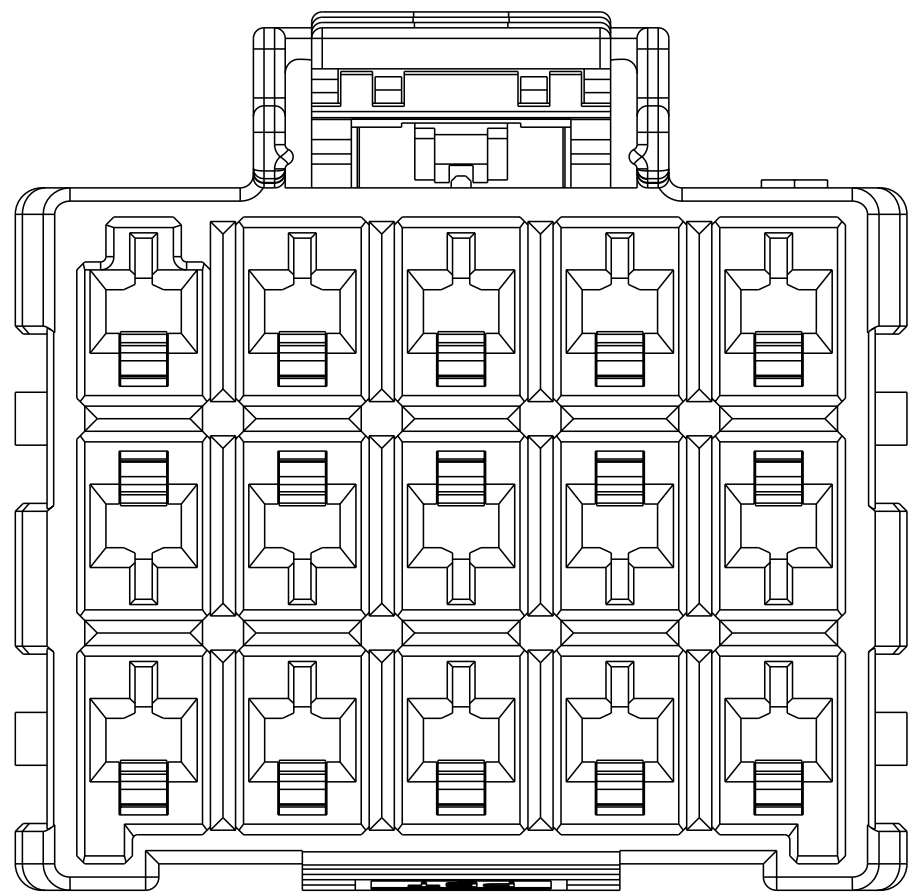


3*5 POSITIONS


3*5	LEVEL 1	KEY A	1-1971876-7
		KEY B	2-1971876-7
		KEY C	3-1971876-7
		KEY D	4-1971876-7
3*4	LEVEL 1	KEY A	5-1971876-7
		KEY B	6-1971876-7
		KEY C	7-1971876-7
		KEY D	8-1971876-7
3*3	LEVEL 1	KEY A	1-1971876-4
		KEY B	2-1971876-4
		KEY C	3-1971876-4
		KEY D	4-1971876-4
3*3	LEVEL 2	KEY A	5-1971876-4
		KEY B	6-1971876-4
		KEY C	7-1971876-4
		KEY D	8-1971876-4
3*3	LEVEL 1	KEY A	1-1971876-3
		KEY B	2-1971876-3
		KEY C	3-1971876-3
		KEY D	4-1971876-3
3*3	LEVEL 2	KEY A	5-1971876-3
		KEY B	6-1971876-3
		KEY C	7-1971876-3
		KEY D	8-1971876-3
POS.	MATERIAL	KEY	P/N

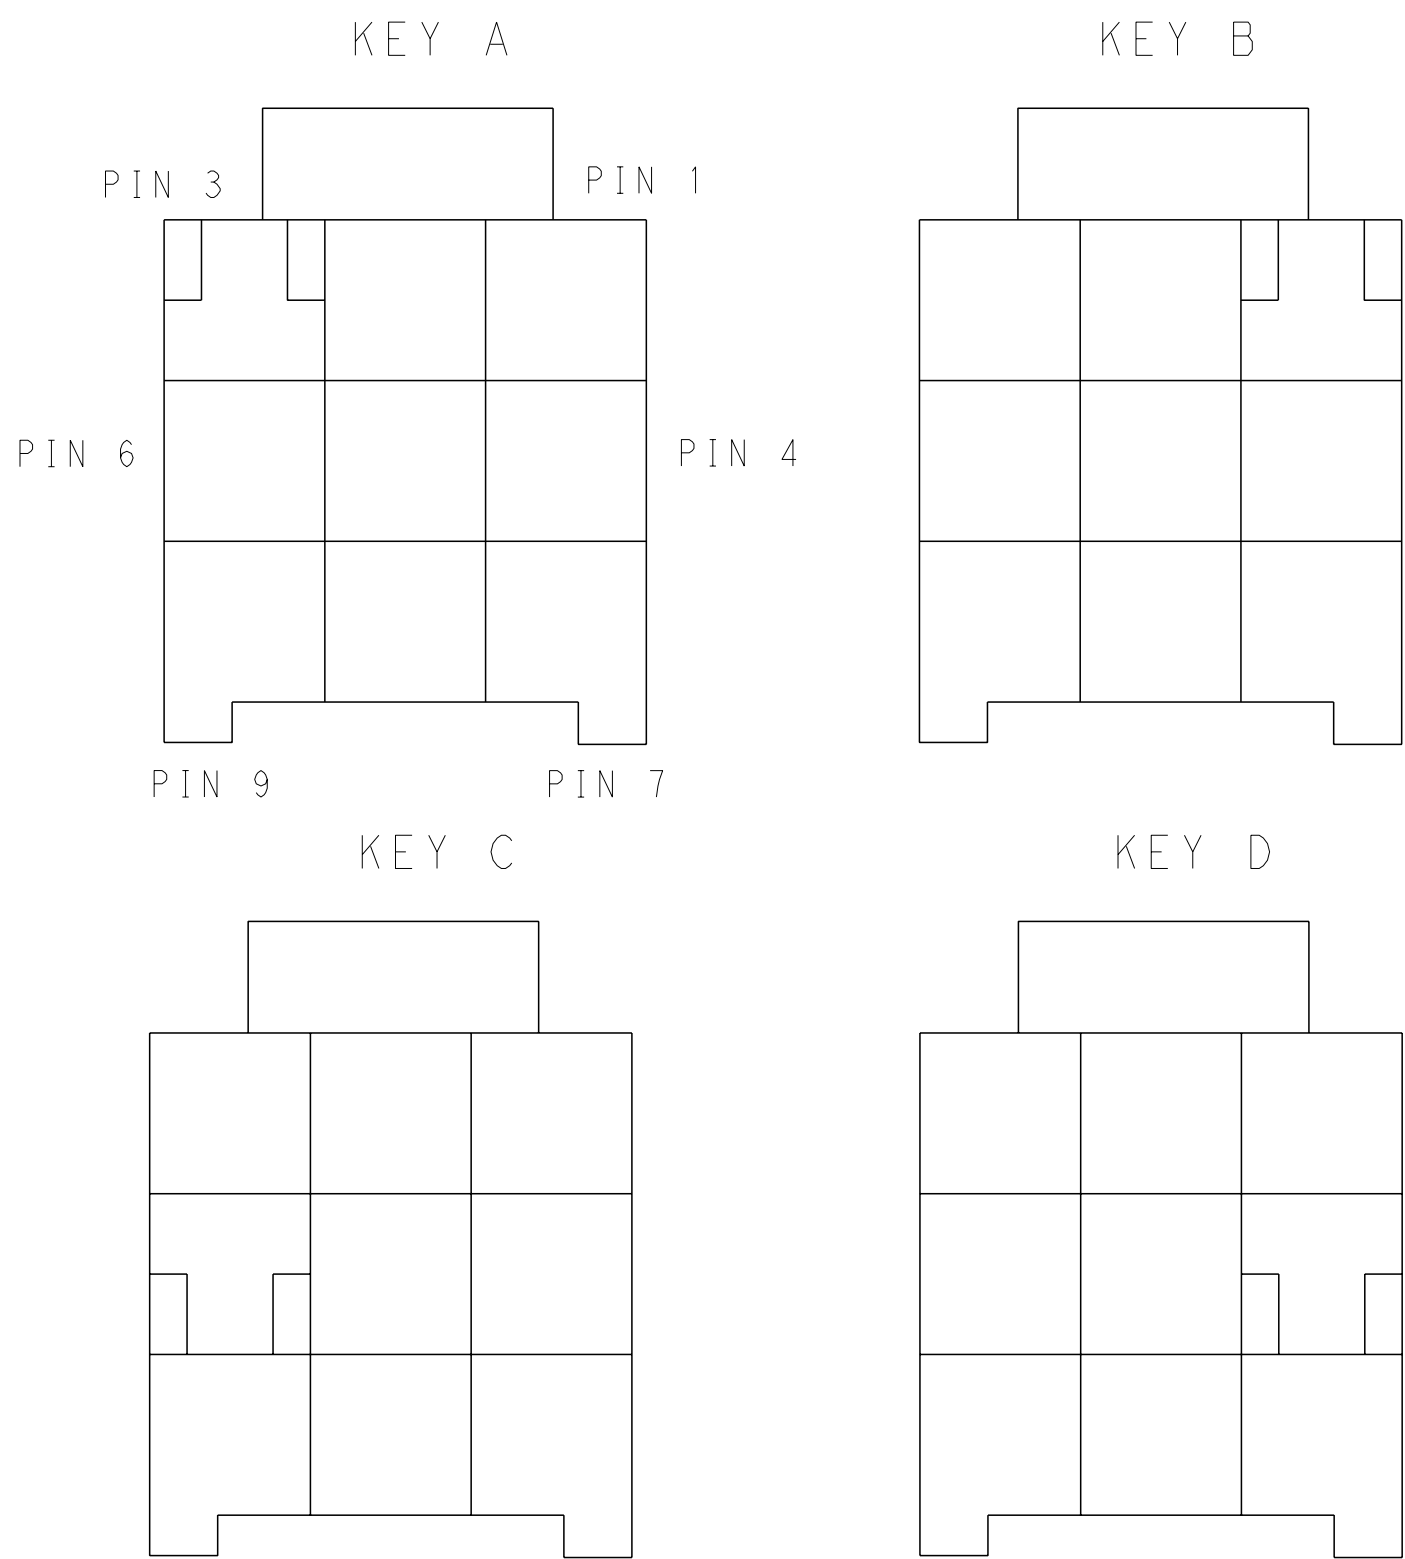

KEYING FOR 3*3 POS.

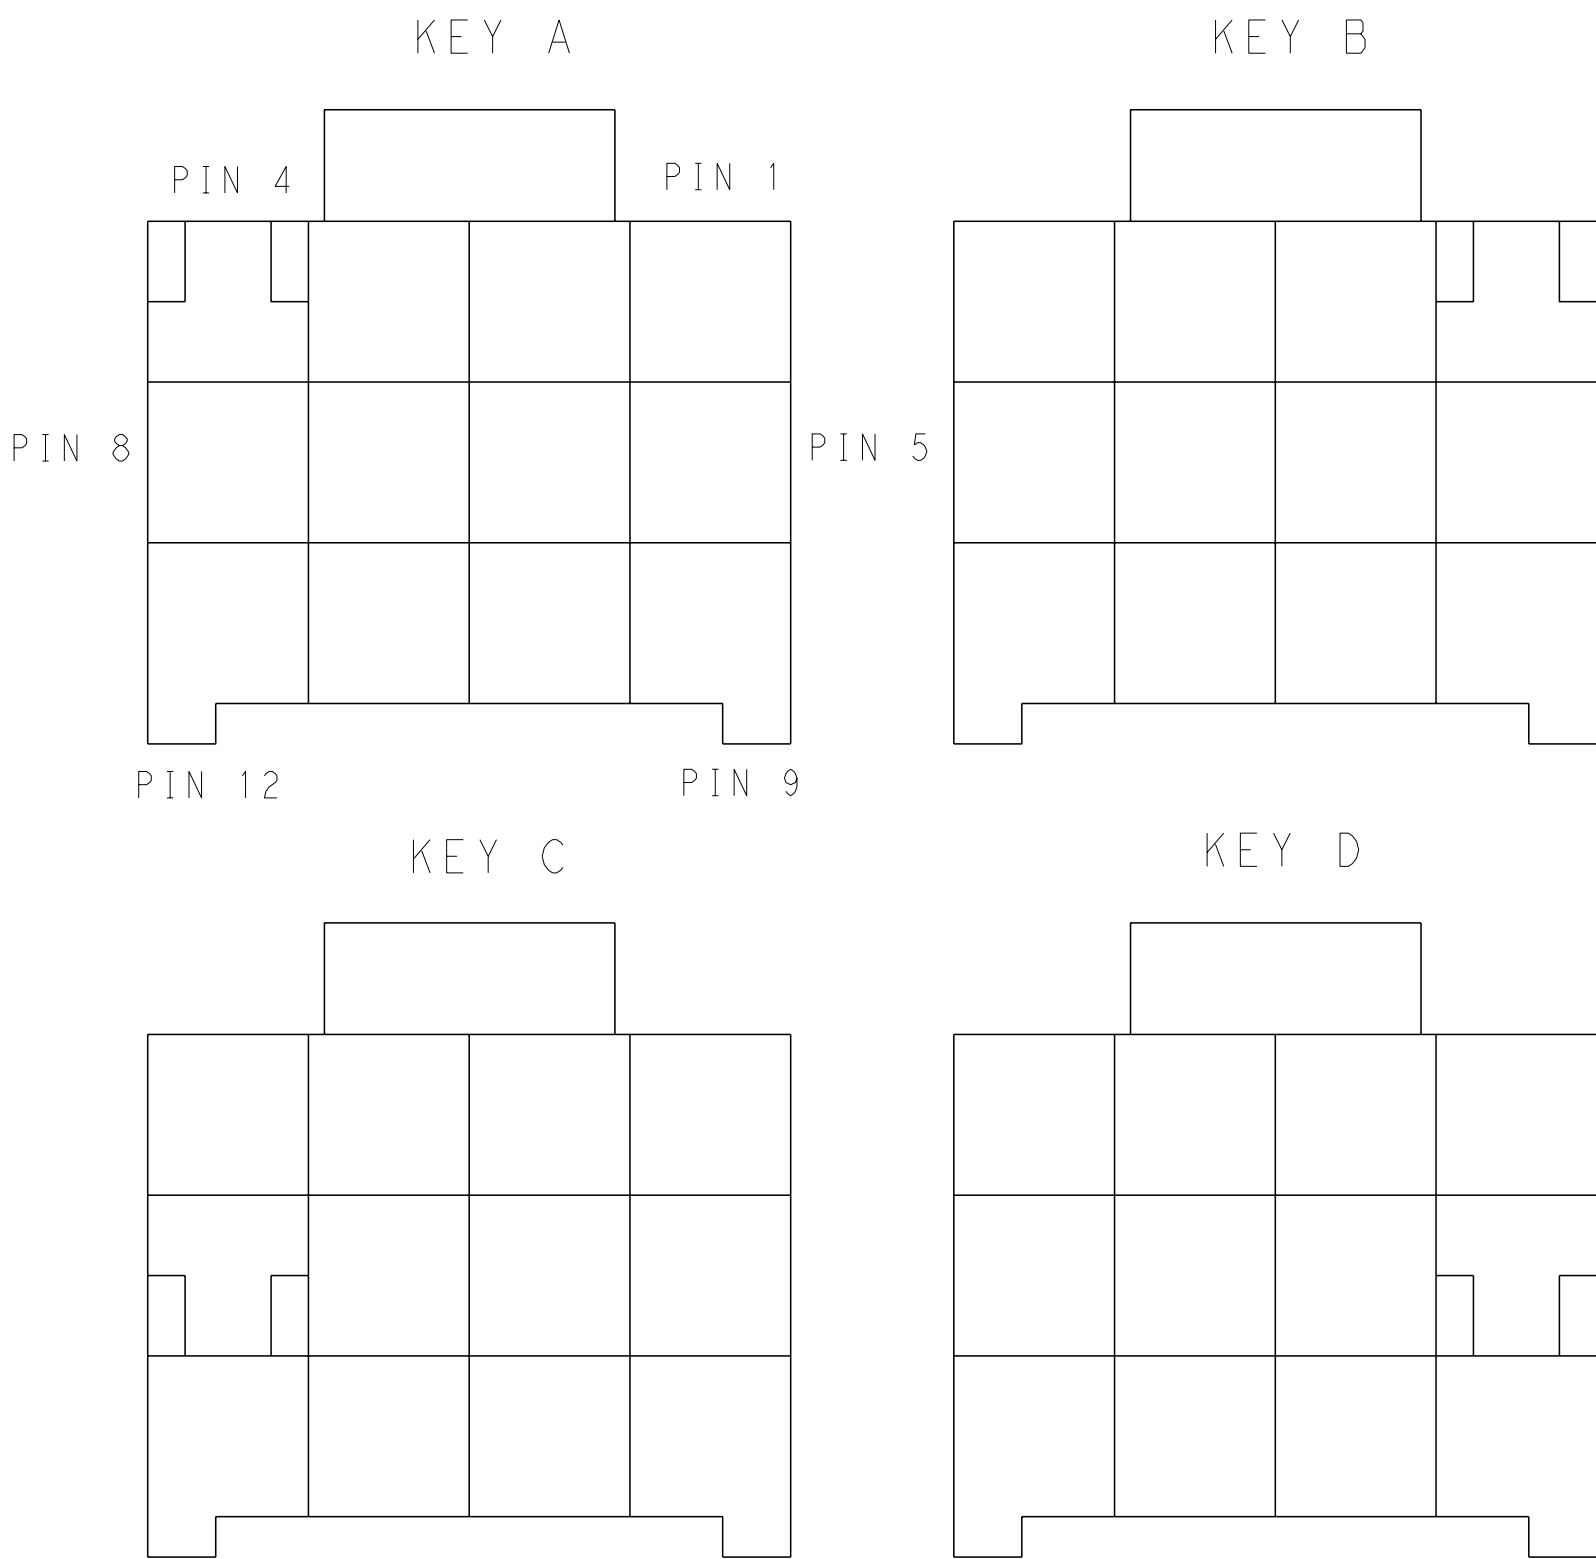

KEYING FOR 3*4 POS.

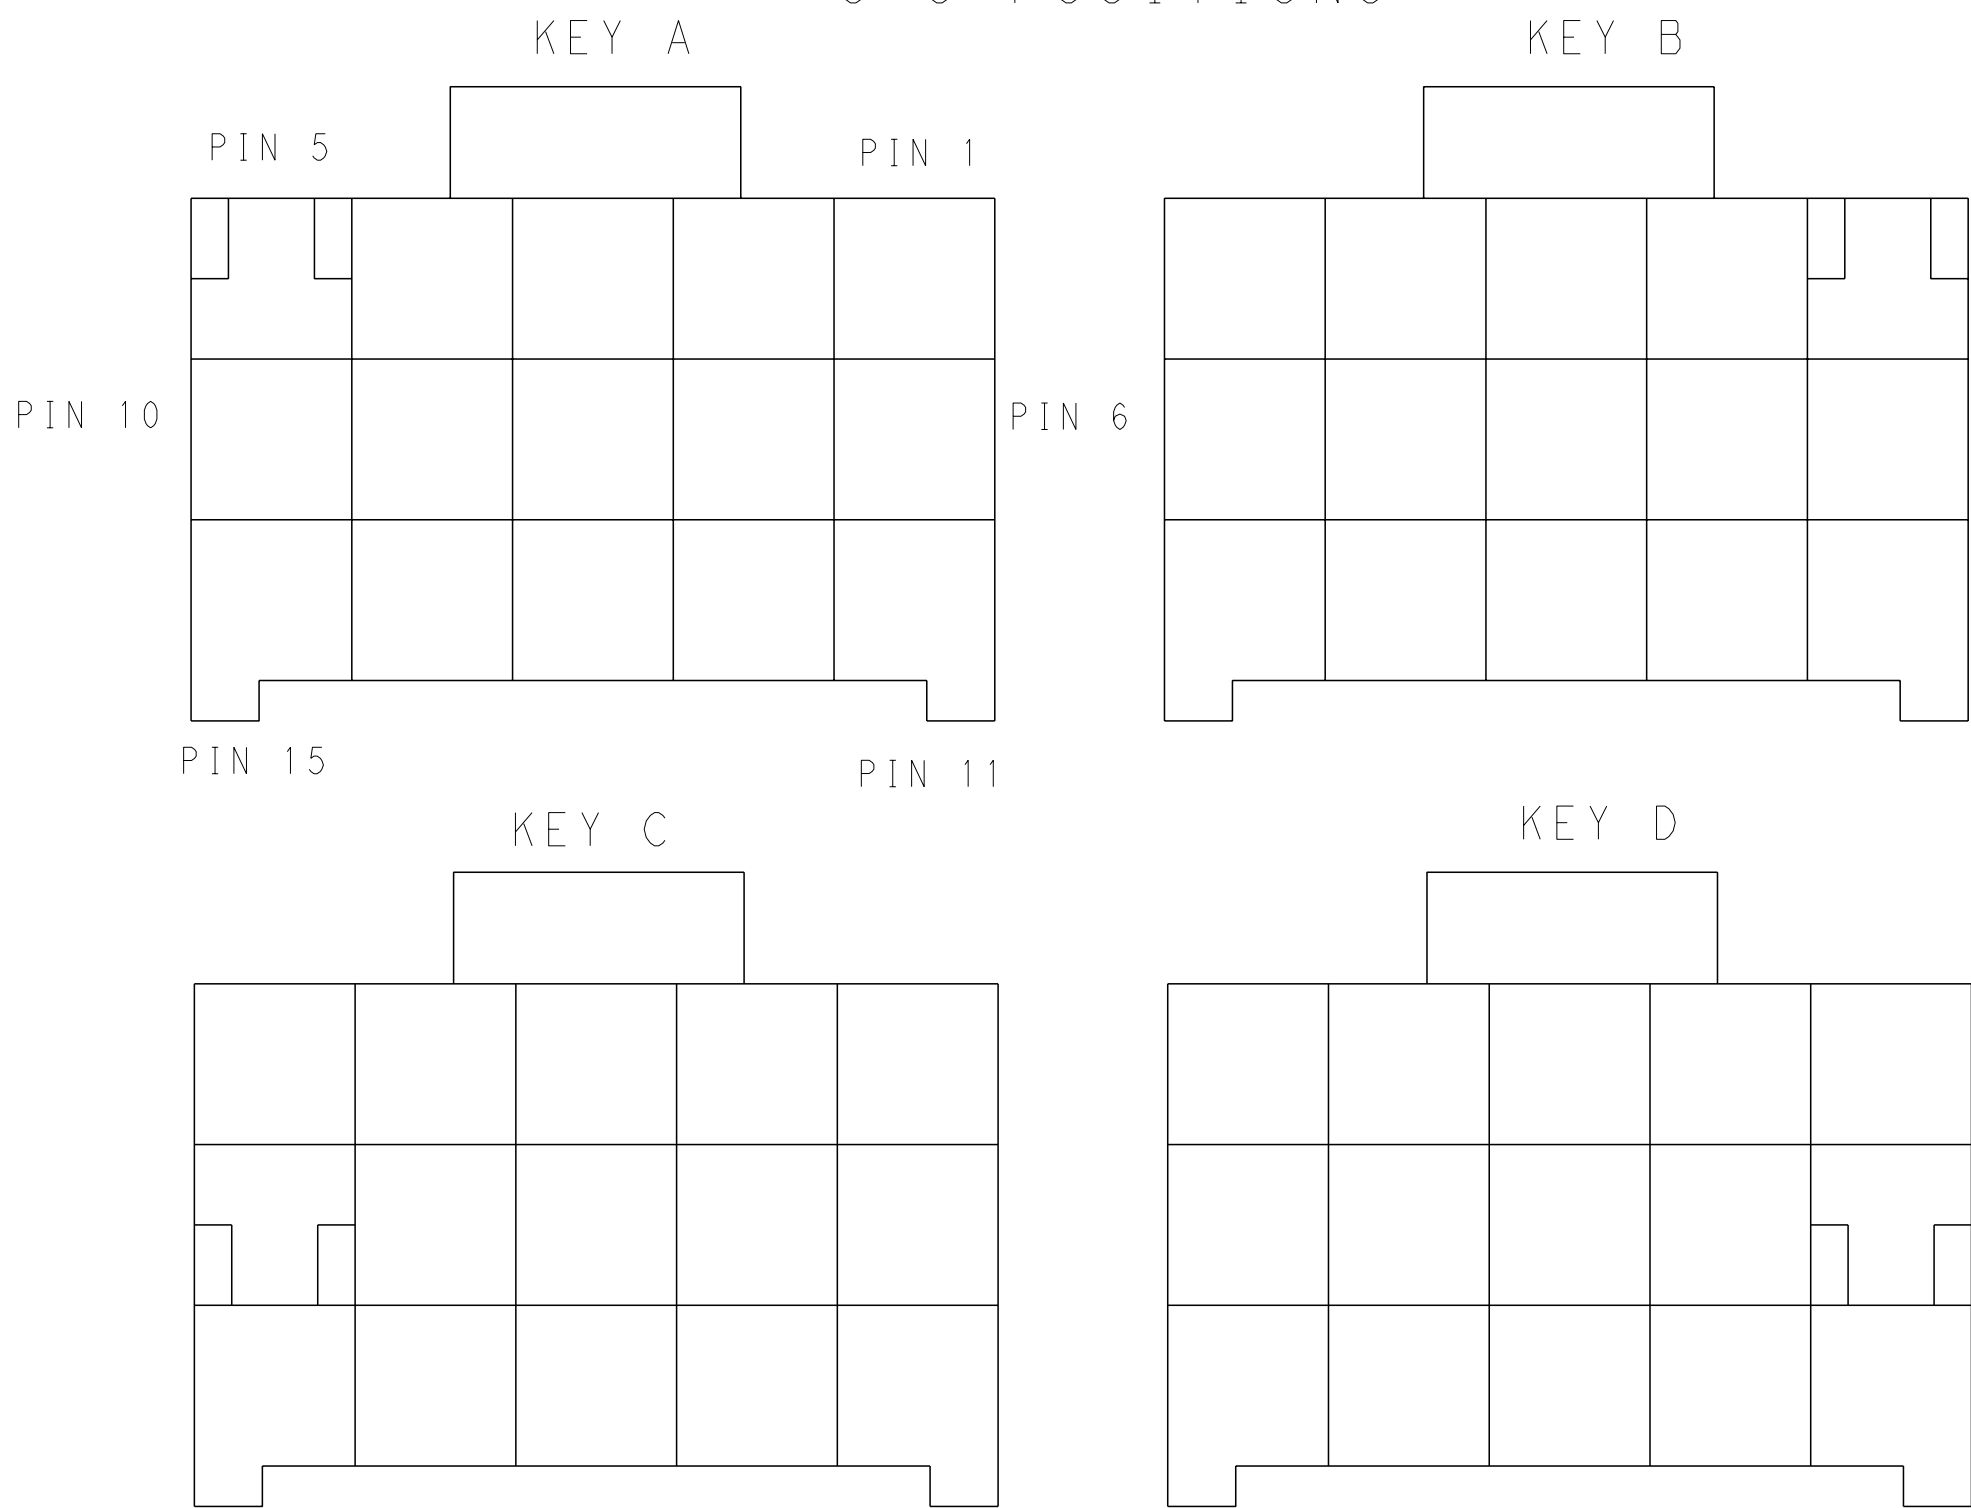

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN TOMMY WU 09JUL2012		TE TE Connectivity PLUG HOUSING,TRIPLE ROW POWER TRIPLE LOCK				
DIMENSIONS: mm		CHK HAPYE WU 09JUL2012						
		APVD YUZHONG MAO 09JUL2012						
		PRODUCT SPEC						
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.35 1 PLC ±0.25 2 PLC ±.25 3 PLC ±.25 4 PLC ±.25 ANGLES ±.25	APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL		WEIGHT		A100779C=1971876		-		
-		-		-		-		
-		-		-		-		
Customer Drawing		SCALE		SHEET 2 OF 2		REV D		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1971876-7](#)