




SMD Power Inductor CDRR157



Dimension - [mm]

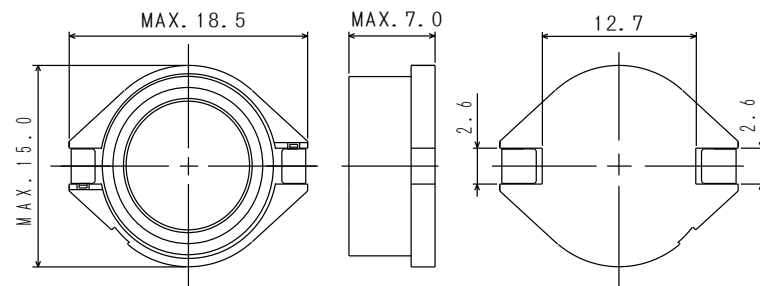

Land pattern and Schematics - [mm]

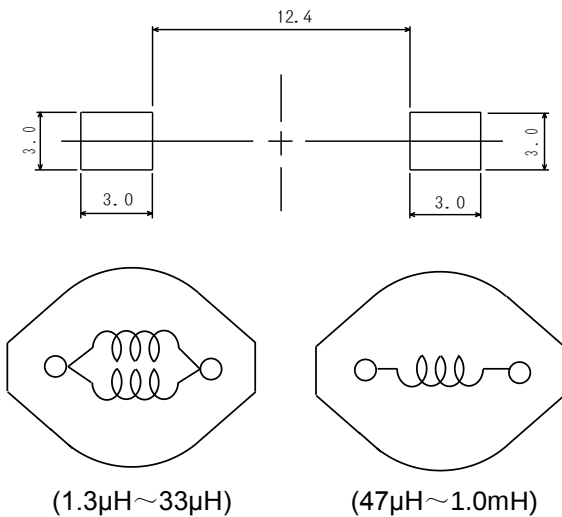

Description

- Ferrite drum core construction.
- Magnetically shielded.
- L $\times$ W $\times$ H: 18.5 $\times$ 15.0 $\times$ 7.0mm Max.
- Product weight: 2.8g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40 $^{\circ}$ C ~ +100 $^{\circ}$ C (including coil's self temperature rise)
- Storage temperature range: -40 $^{\circ}$ C ~ +100 $^{\circ}$ C
- Solder reflow temperature: 260 $^{\circ}$ C peak.

Packaging

- Carrier tape and reel packaging.
- 13" diameter reel
- 300pcs per reel

Applications

- Ideally used in Portable Computers, Video Recorder, DSC/DVC, etc as DC-DC Converter inductors.

SMD Power Inductor

CDRR157



Electrical Characteristics

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (m Ω) Max. (Typ.) (at 20°C)	Saturation Current (A) ※2	Temperature rise current (A) ※3
CDRR157NP-1R3MC	1R3M	1.3 $\mu\text{H} \pm 20\%$	5.7(4.5)	17.0	9.2
CDRR157NP-2R0MC	2R0M	2.0 $\mu\text{H} \pm 20\%$	7.0(5.6)	13.4	9.0
CDRR157NP-2R7MC	2R7M	2.7 $\mu\text{H} \pm 20\%$	8.3(6.6)	12.0	8.0
CDRR157NP-3R3MC	3R3M	3.3 $\mu\text{H} \pm 20\%$	9.6(7.7)	10.8	7.5
CDRR157NP-4R7MC	4R7M	4.7 $\mu\text{H} \pm 20\%$	12.9(10.3)	9.2	6.5
CDRR157NP-6R8MC	6R8M	6.8 $\mu\text{H} \pm 20\%$	16.5(13.2)	7.6	6.0
CDRR157NP-100MC	100M	10 $\mu\text{H} \pm 20\%$	25.0(20.0)	6.4	5.0
CDRR157NP-150MC	150M	15 $\mu\text{H} \pm 20\%$	37.5(30.0)	5.0	3.8
CDRR157NP-220MC	220M	22 $\mu\text{H} \pm 20\%$	47.0(37.5)	4.2	3.5
CDRR157NP-330MC	330M	33 $\mu\text{H} \pm 20\%$	69.0(55.0)	3.5	2.7
CDRR157NP-470MC	470M	47 $\mu\text{H} \pm 20\%$	105.0(84.0)	2.9	2.0
CDRR157NP-680MC	680M	68 $\mu\text{H} \pm 20\%$	166.0(133)	2.4	1.6
CDRR157NP-101MC	101M	100 $\mu\text{H} \pm 20\%$	244.0(195)	2.0	1.3
CDRR157NP-151MC	151M	150 $\mu\text{H} \pm 20\%$	330.0(264)	1.6	1.1
CDRR157NP-221MC	221M	220 $\mu\text{H} \pm 20\%$	485.0(388)	1.3	0.9
CDRR157NP-271MC	271M	270 $\mu\text{H} \pm 20\%$	595.0(475)	1.2	0.8
CDRR157NP-331MC	331M	330 $\mu\text{H} \pm 20\%$	738.0(590)	1.1	0.7
CDRR157NP-471MC	471M	470 $\mu\text{H} \pm 20\%$	1000.0(800)	0.9	0.6
CDRR157NP-681MC	681M	680 $\mu\text{H} \pm 20\%$	1544(1227)	0.75	0.5
CDRR157NP-102MC	102M	1000 $\mu\text{H} \pm 20\%$	2388(1910)	0.60	0.4

※1. Inductance measuring condition: at 100 kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 90% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).













SMD Power Inductor

CDRR157



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

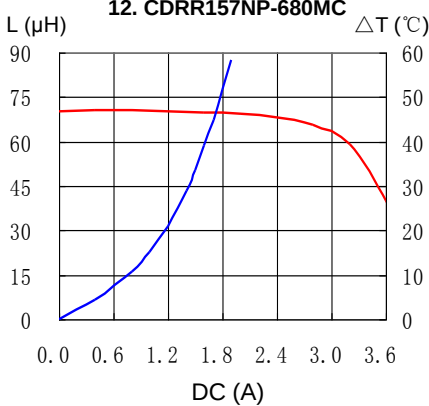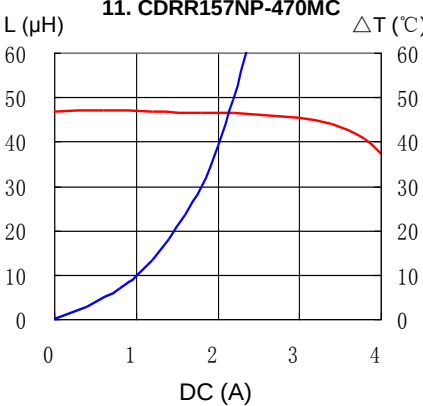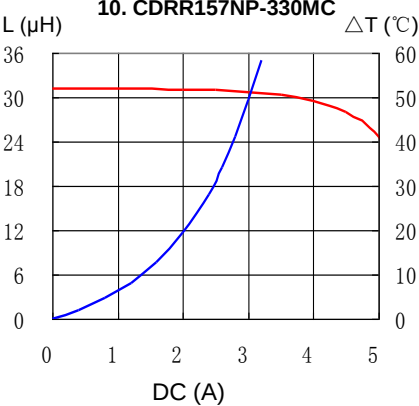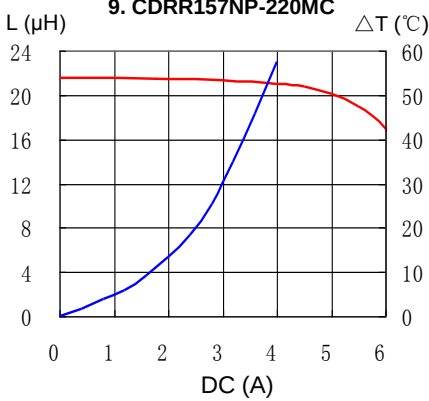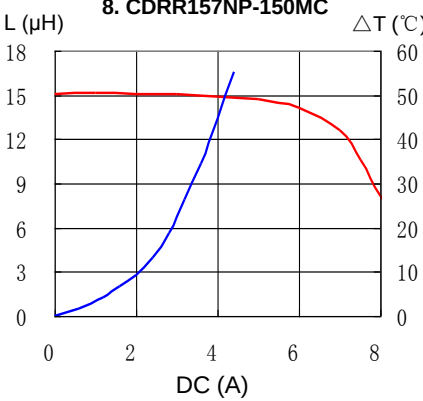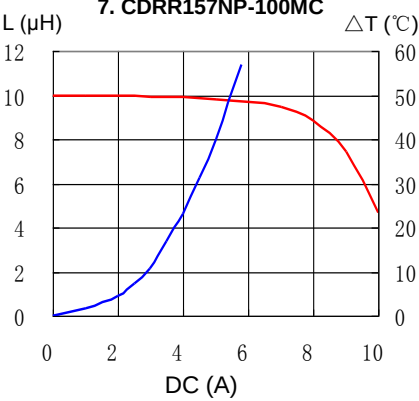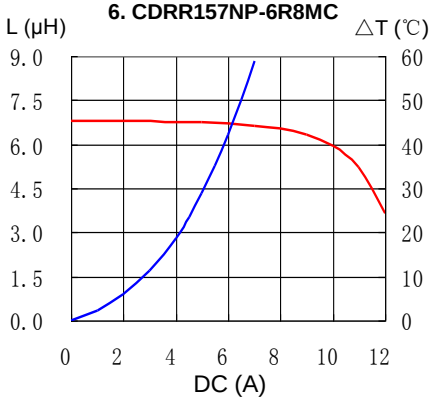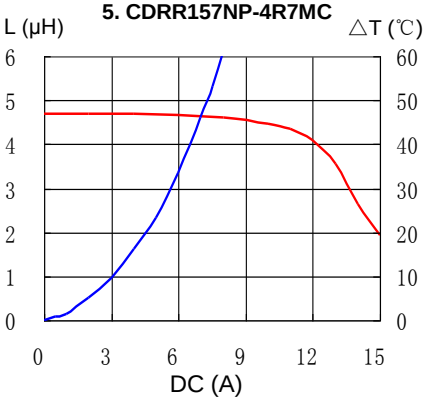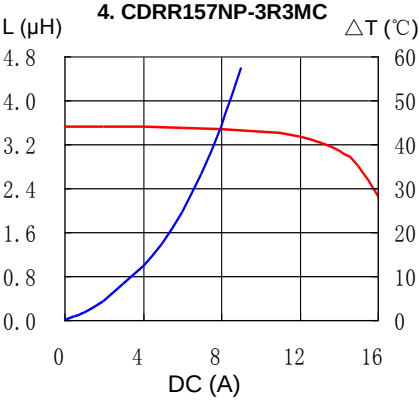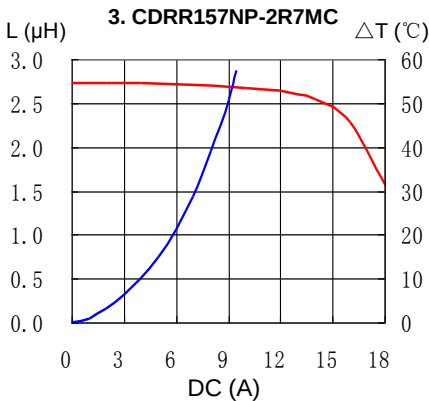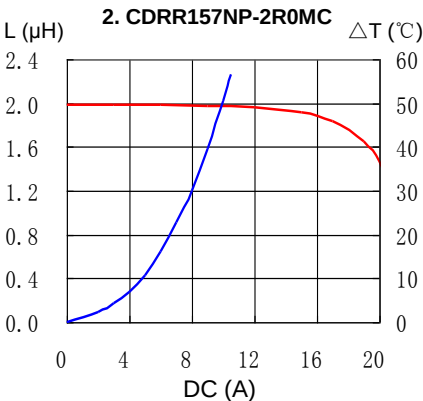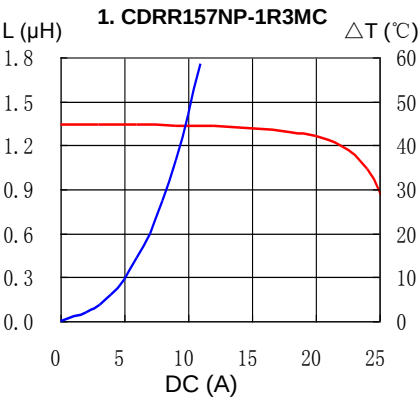









SMD Power Inductor

CDRR157



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

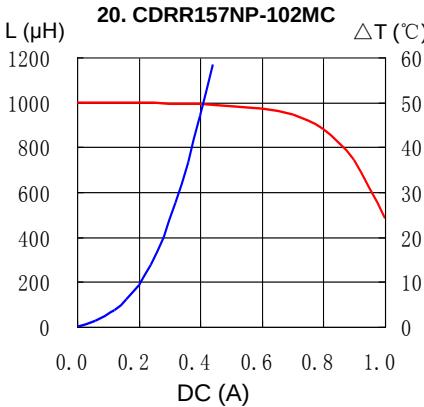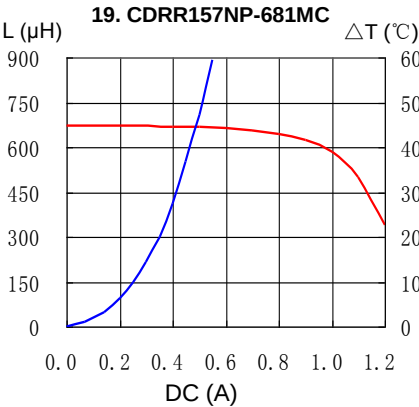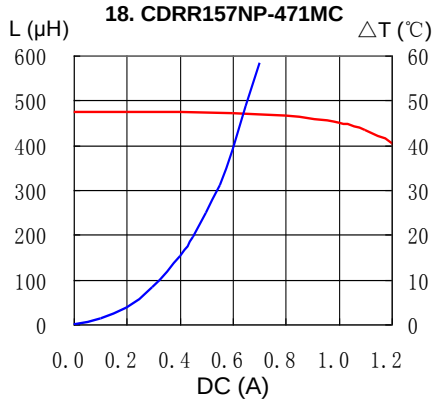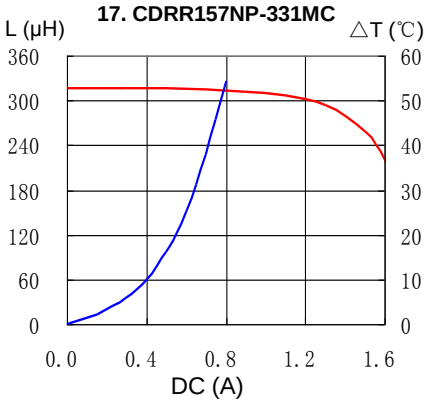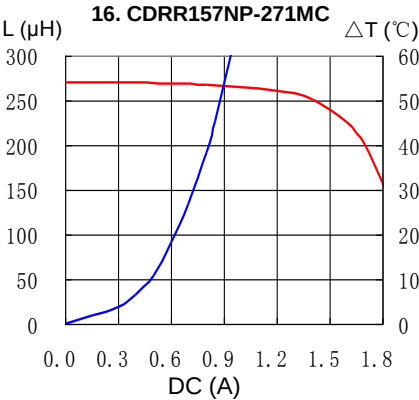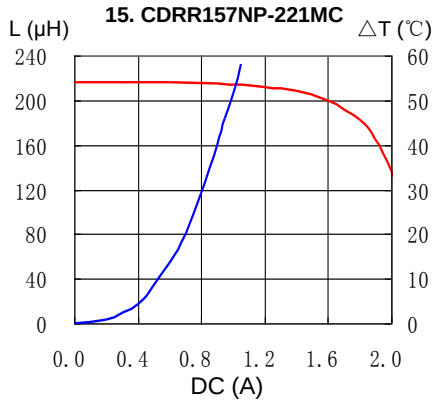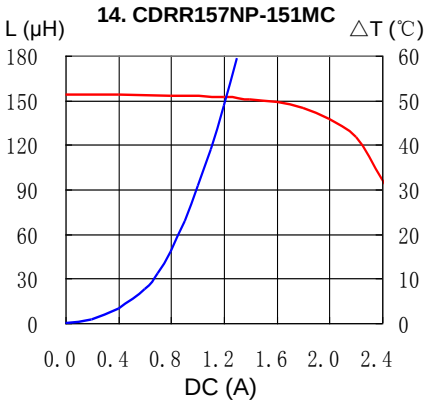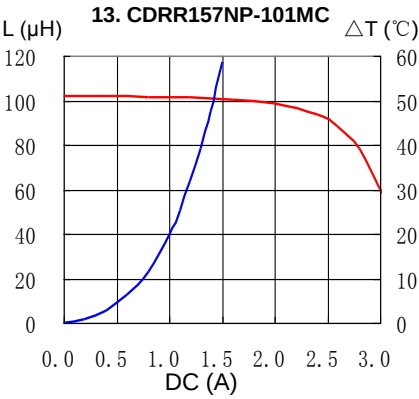


SMD Power Inductor CDRR157




Solder Reflow Condition

Heat Endurance

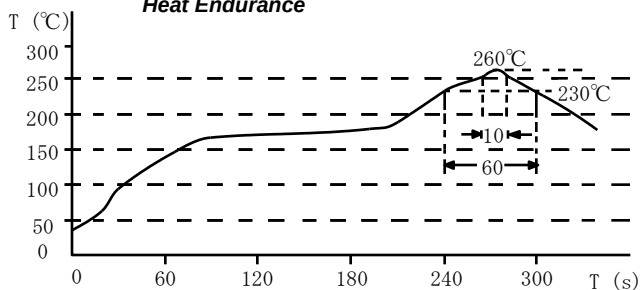

Temperature Chart

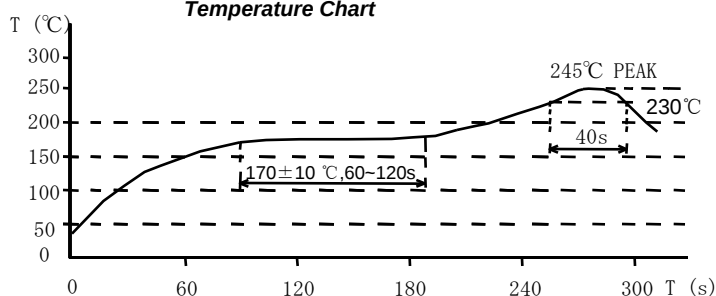

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sumida:

<u>CDRR157NP-331MC</u>	<u>CDRR157NP-151MC</u>	<u>CDRR157NP-470MC</u>	<u>CDRR157NP-102MC</u>	<u>CDRR157NP-221MC</u>
<u>CDRR157NP-471MC</u>	<u>CDRR157NP-100MC</u>	<u>CDRR157NP-330MC</u>	<u>CDRR157NP-101MC</u>	<u>CDRR157NP-271MC</u>
<u>CDRR157NP-2R0MC</u>	<u>CDRR157NP-150MC</u>	<u>CDRR157NP-4R7MC</u>	<u>CDRR157NP-1R3MC</u>	<u>CDRR157NP-3R3MC</u>
<u>CDRR157NP-2R7MC</u>	<u>CDRR157NP-681MC</u>	<u>CDRR157NP-220MC</u>	<u>CDRR157NP-6R8MC</u>	<u>CDRR157NP-680MC</u>