
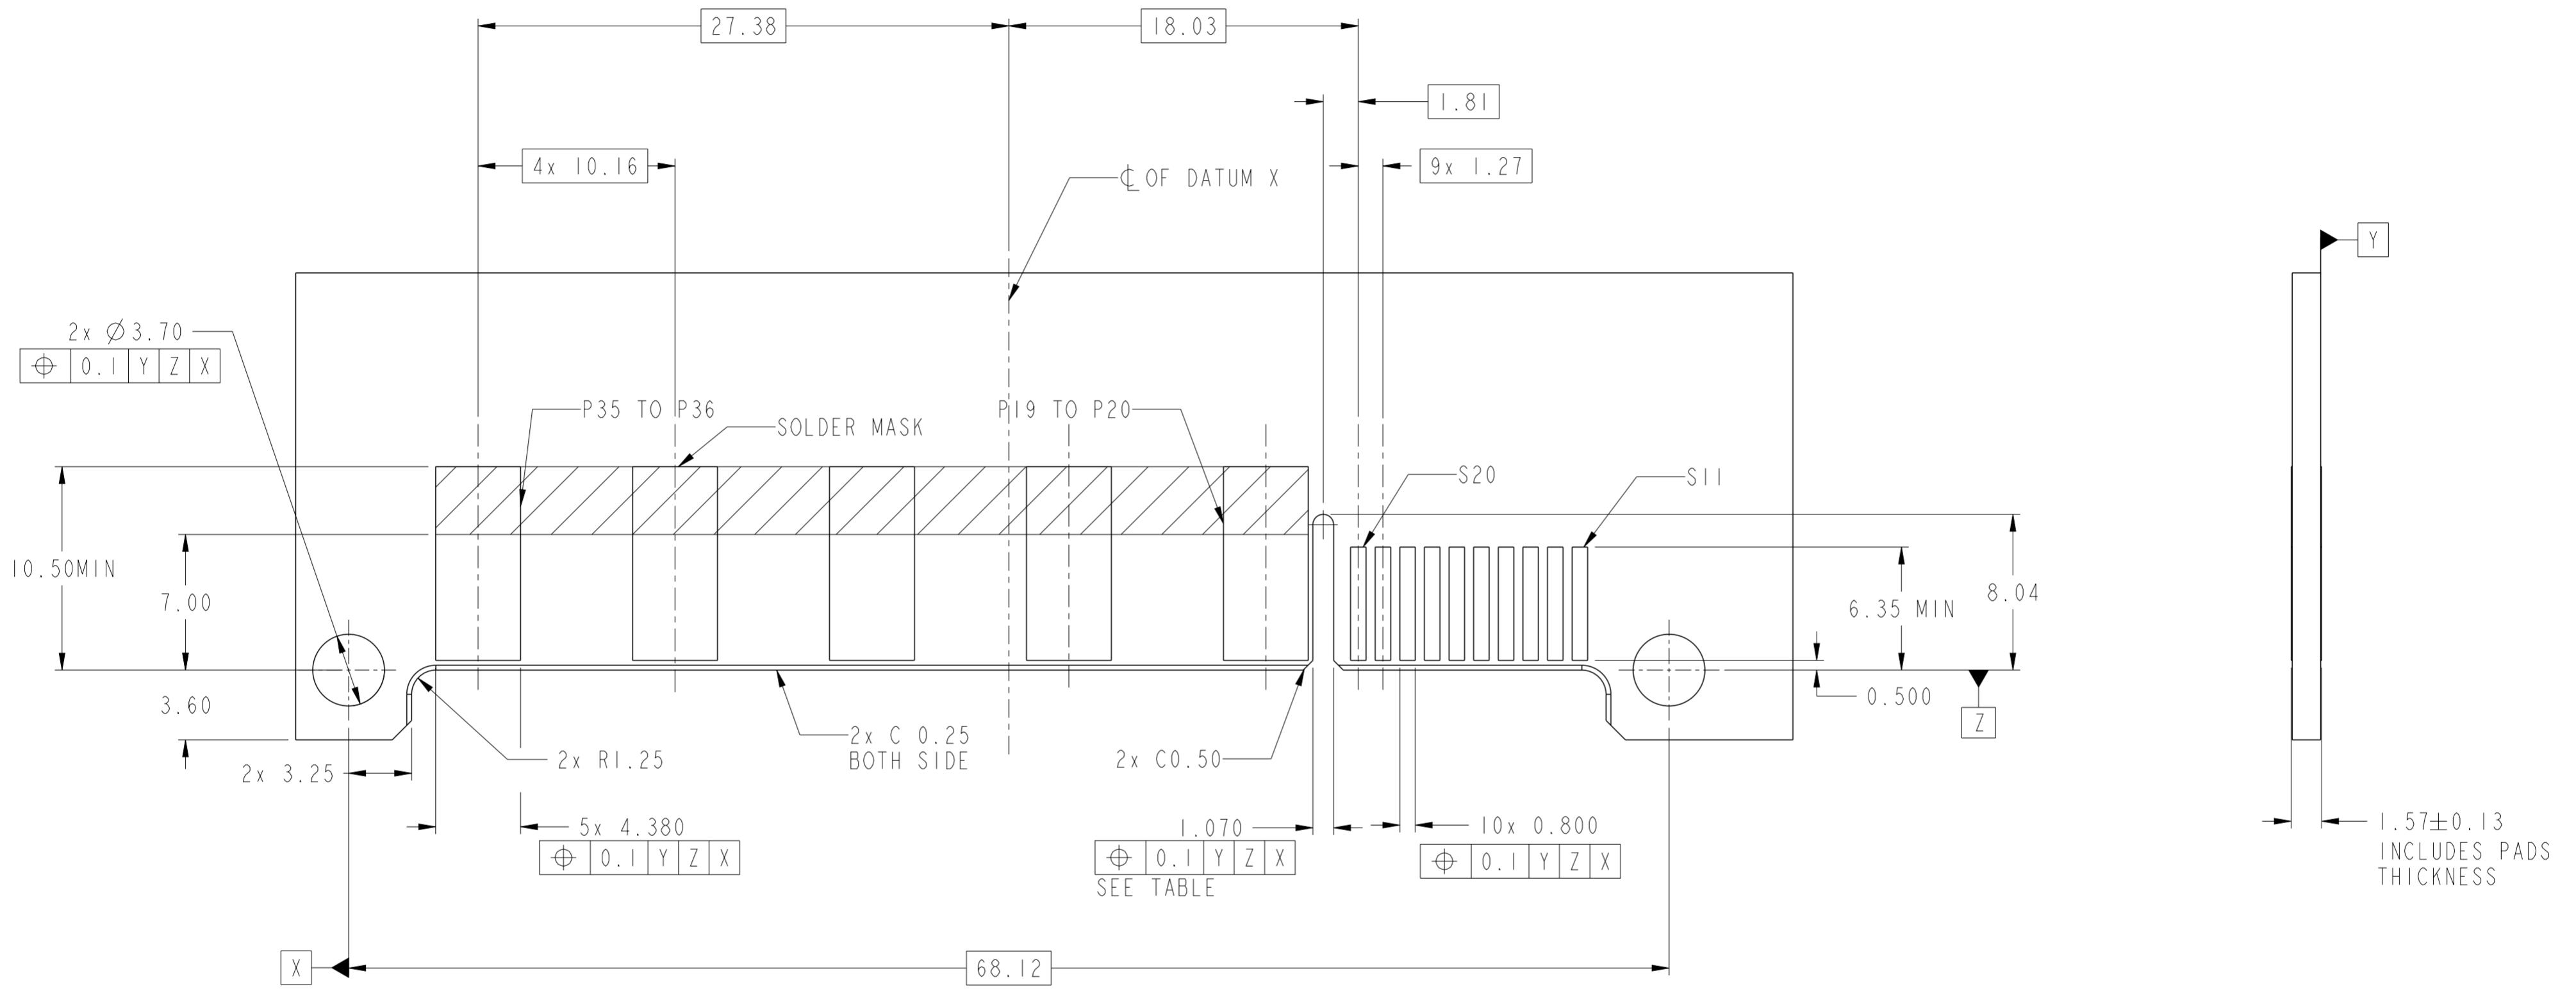



| | | | | | | | | | | | | | |
|---------------|---------------------------------------|-------|-------|---|----------------|---|------------|---|---|--------------|----------|-------|-----|
| spec ref | | | | dr | Hai-Ling Liu | | 2014/07/21 |  |  | size | A2 | scale | 4:1 |
| tolerance std | TOLERANCES UNLESS OTHERWISE SPECIFIED | | | eng | Hai-Ling Liu | | 2014/08/19 | | | ecn no | - | | |
| | | | | chr | - | | - | | | rel level | Released | | |
| | | | | appr | Pei-Ming Zheng | | 2014/08/18 | product family | | | | | |
| | | | | | | | | dwg no | | 10130993 | | | |
| surface | linear | 0.X | ±0.50 |  | HPCE STMT | | | | | | rev A | | |
| | | 0.XX | ±0.25 | | | | | | | | | | |
| | | 0.XXX | ±0.10 | | | | | | | | | | |
| | angular | 0° | ±2° | www.fci.com | cat. no. | - | Product | - | Customer Drw | sheet 1 of 4 | | | |



RECOMMENDED HOSTBOARD LAYOUT
DIMENSION TOLERANCE IS ± 0.05 mm

Copyright FCL.


| | | | | | | |
|--|----------------|------------|---|---------|--------------|--------------|
| dr | Hai-Ling Liu | 2014/07/21 | projection  | MM | size | scale |
| eng | Hai-Ling Liu | 2014/08/19 | | | A2 | 4:1 |
| chr | - | - | | ecn no | - | |
| appr | Pei-Ming Zheng | 2014/08/18 | product family | - | rel level | Released |
| FCI | | title | HPCE STMT | dwg no | 10130993 | |
| | | note | 36LP+20S(OMMITTED 16LP) | | rev A | |
| www.fci.com | | cat. no. | - | Product | Customer Drw | sheet 2 of 4 |

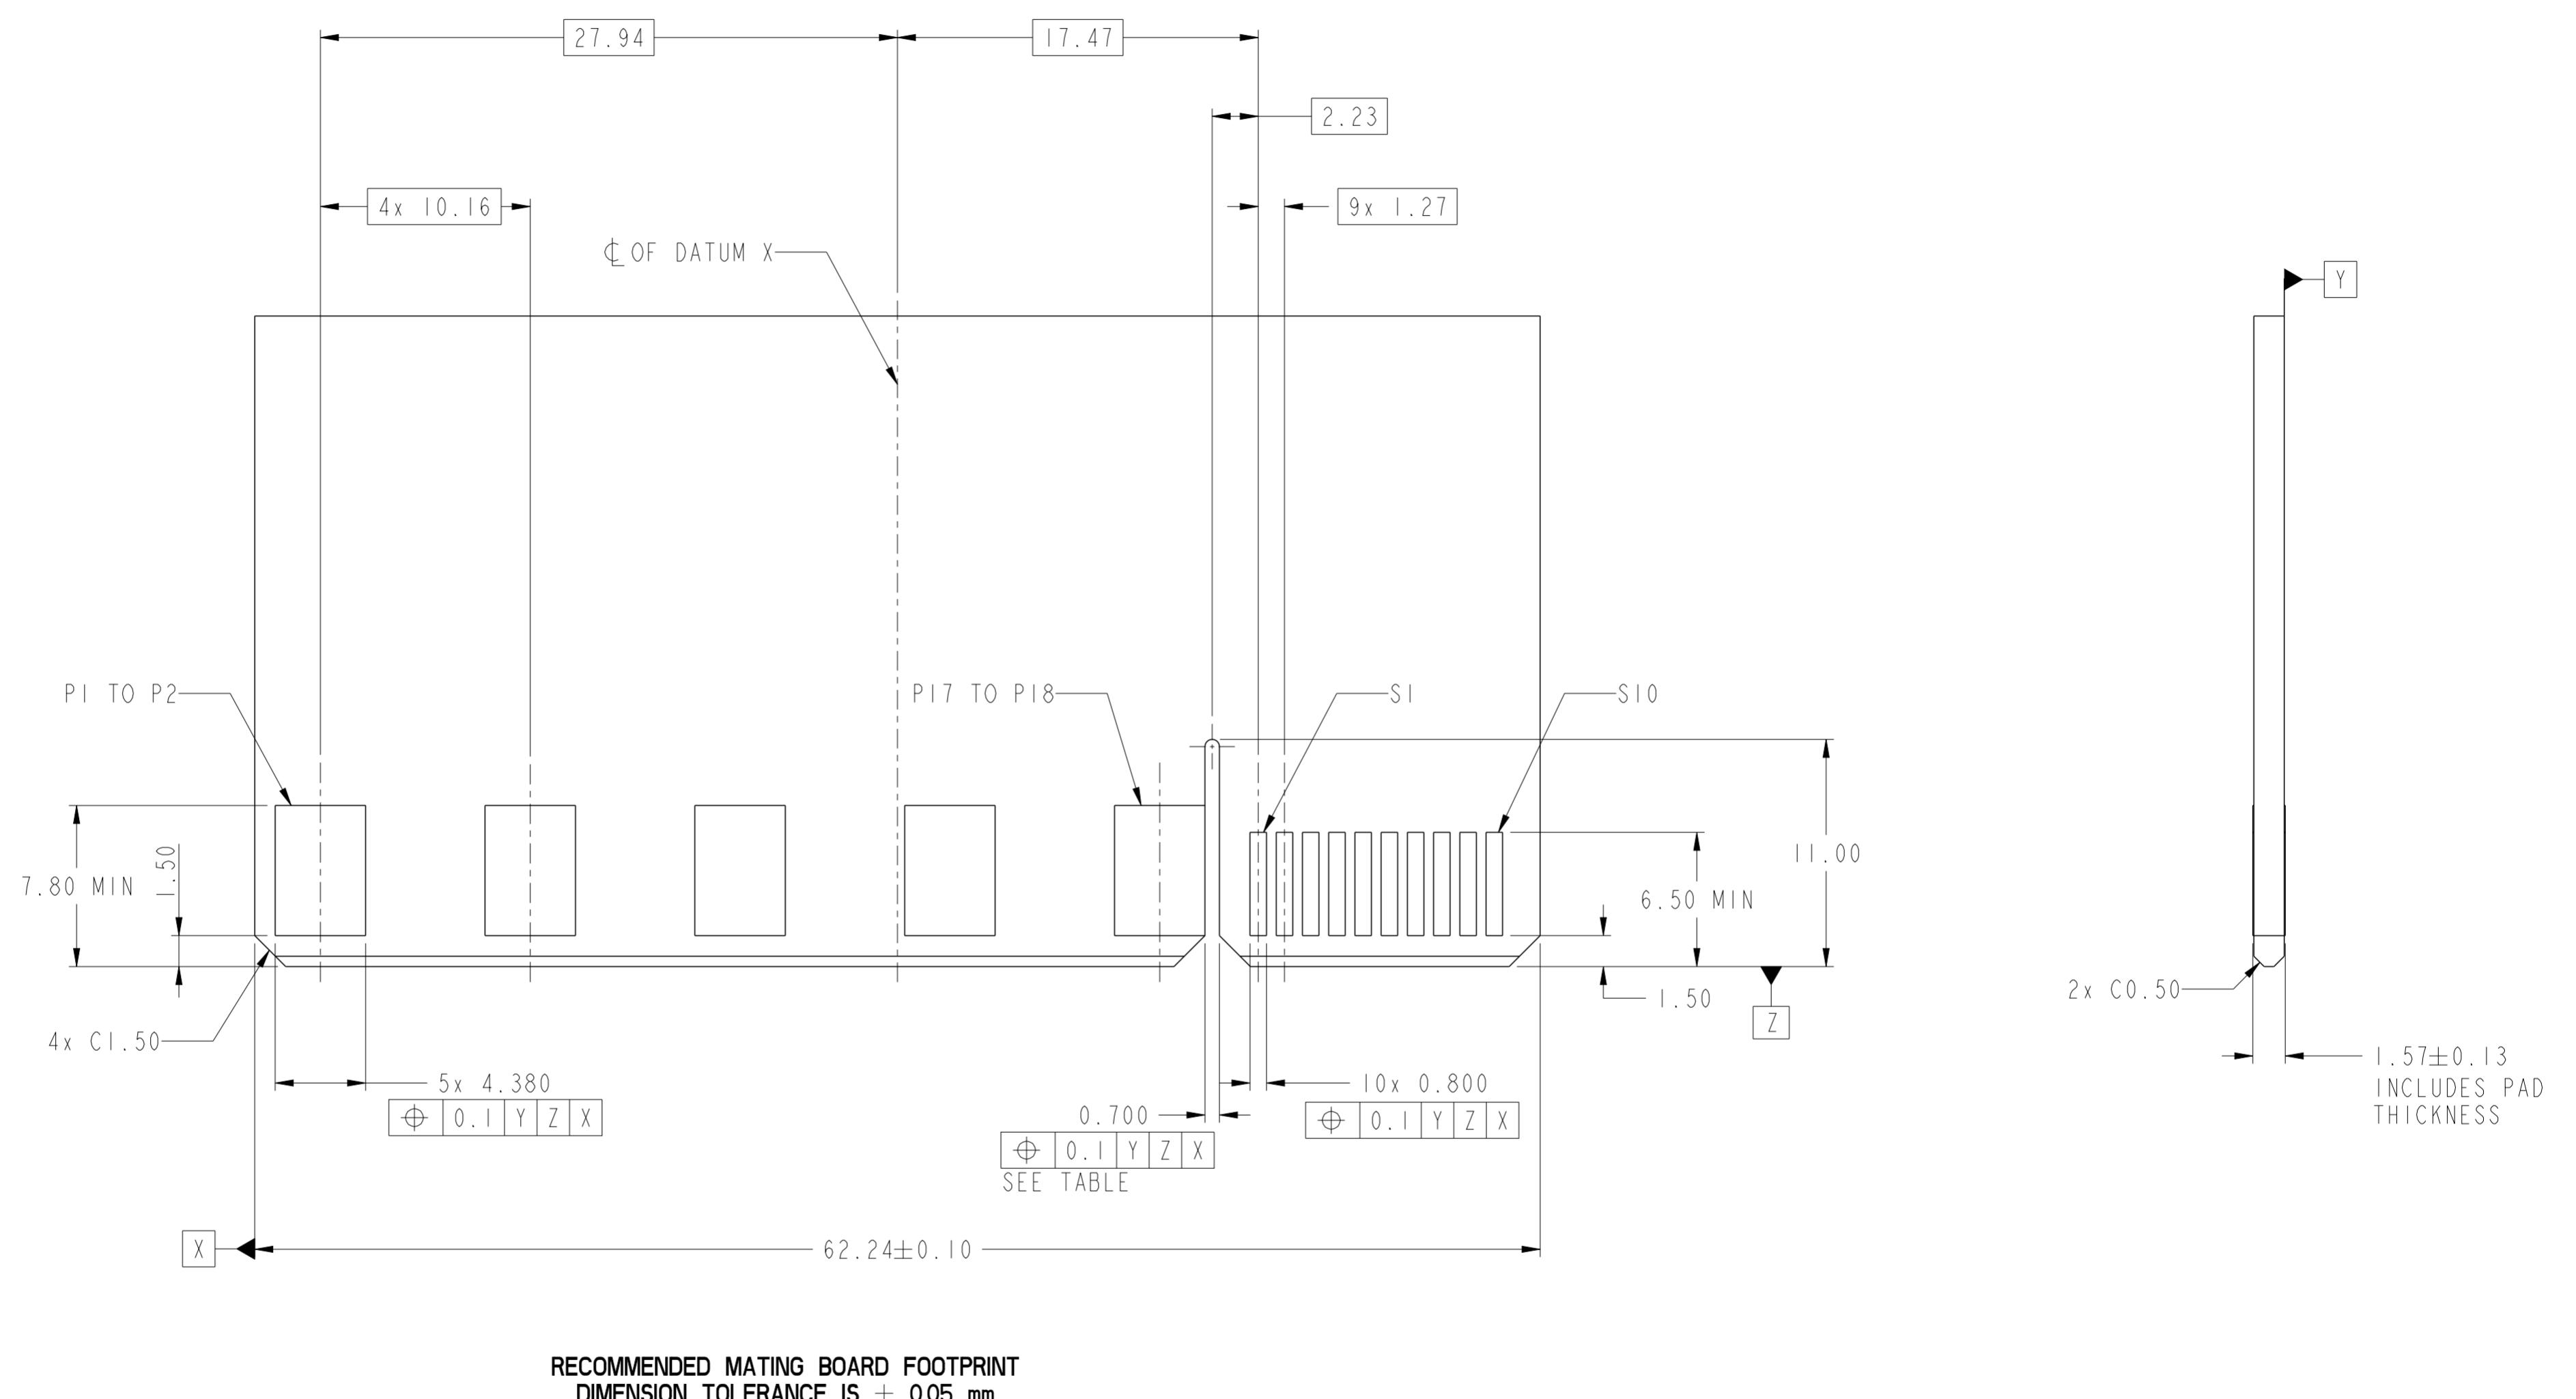


| | | | | | | | | |
|-------------|-------------------------|-----------------|----------------|----------------|-----------|----|-------|--------------|
| dr | Hai-Ling Liu | 2014/07/21 | projection | MM | size | A2 | scale | 4:1 |
| eng | Hai-Ling Liu | 2014/08/19 | | | ecn no | | | |
| chr | - | - | | | rel level | | | |
| oppr | Pei-Ming Zheng | 2014/08/18 | product family | | | | | |
| | | | | | | | | Released |
| FCI | HPCE STMT | 10130993 | | | | | | |
| | 36LP+20S(OMITTED 16LP) | | | | | | | |
| www.fci.com | cat. no. | - | Product | - Customer Drw | | | | |
| | | | | | | | | sheet 3 of 4 |

TABLE

| PART NUMBER | MOUNTING EARS | POLARIZATION KEY | REAR GUIDE |
|--------------------|---------------|------------------|------------|
| 10130993-003620ALF | Y | Y | Y |
| 10130993-003620BLF | Y | N | Y |
| 10130993-003620CLF | Y | N | N |
| 10130993-003620DLF | N | Y | Y |
| 10130993-003620ELF | N | N | Y |
| 10130993-003620FLF | N | N | N |
| 10130993-003620GLF | Y | Y | N |
| 10130993-003620HLF | N | Y | N |

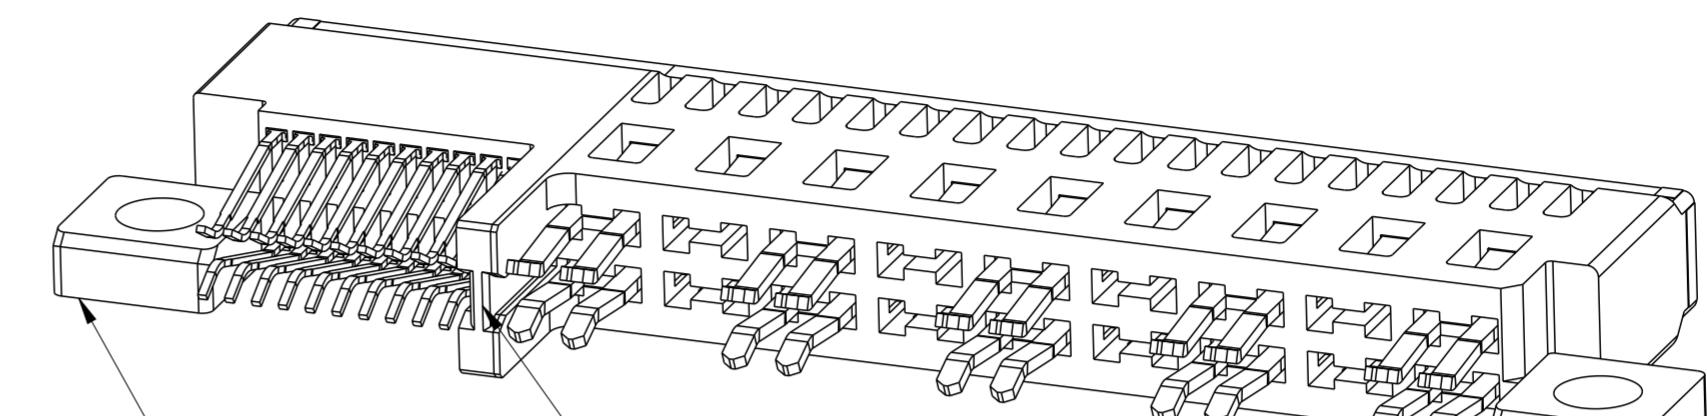

MOUNTING EARS
REAR KEY

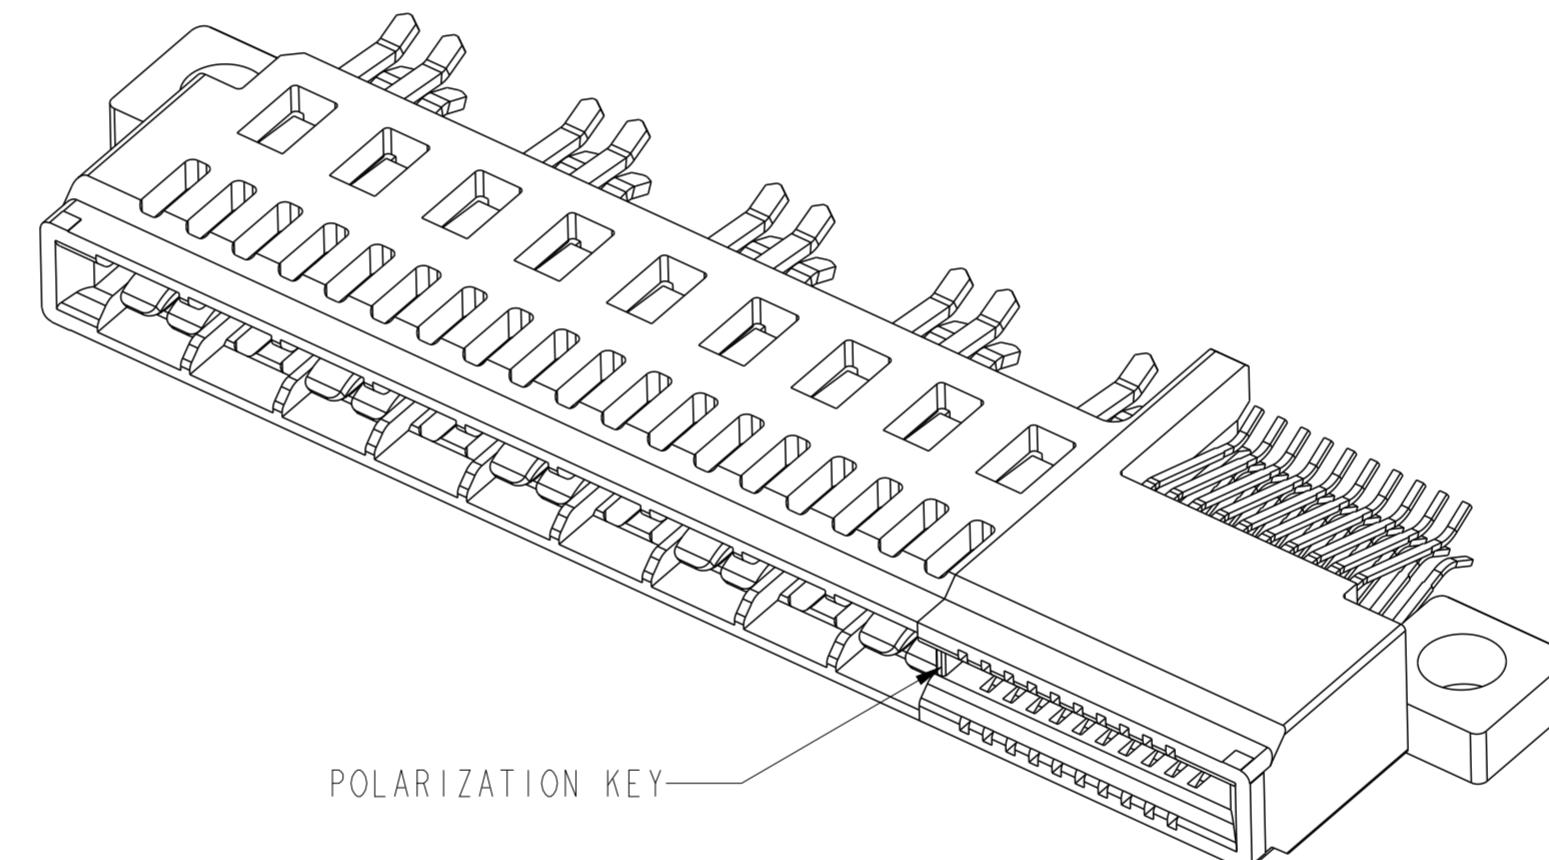

POLARIZATION KEY

NOTES:

1. CONNECTOR MATERIALS:

HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT
CONTACTS: HIGH PERFORMANCE COPPER ALLOY.

2. CONTACT FINISH REF. GS-12-604 SECTION 5.2.
3. PRODUCT SPECIFICATION: GS-12-604.
4. APPLICATION SPECIFICATION: GS-20-128.
5. PRODUCT MARKING (FCI - PART NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN.
6. PACKAGING MEETS FCI SPECIFICATION GS-14-937.

| | | | | |
|---|----------------|------------------------|------------------|---|
| dr | Hai-Ling Liu | 2014/07/21 | projection MM | size A2 scale 4:1 ecn no - rel level - |
| eng | Hai-Ling Liu | 2014/08/19 | | |
| chr | - | - | | |
| oppr | Pei-Ming Zheng | 2014/08/18 | | |
| product family | | | Released | |
|  HPCE STMT 36LP+20S(OMITTED 16LP) | | | 10130993 | |
| www.fci.com | | | rev A | |
| cat. no. | - | Product - Customer Drw | sheet 4 of 4 | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10130993-003620ALF](#)