



DIMENSIONS

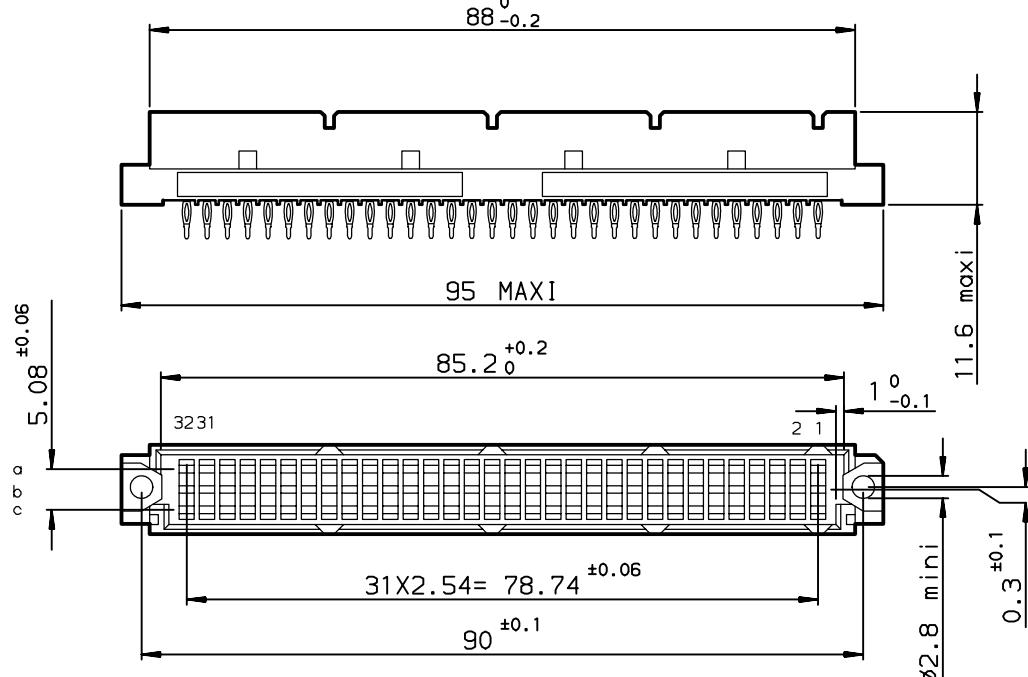

P.C. CARD DRILLING (Component side view)

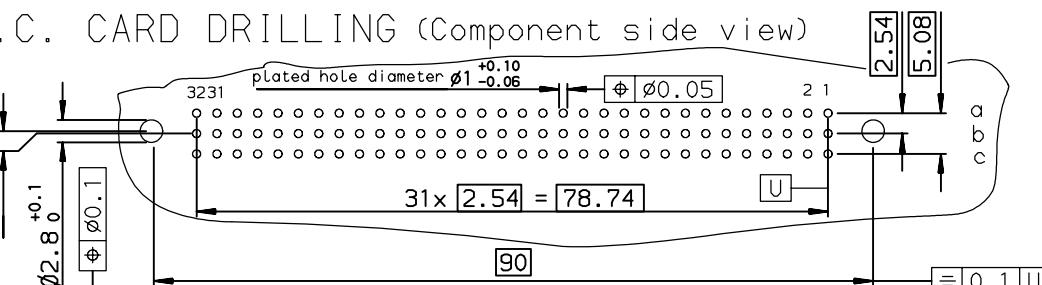


SPECIFICATION 130= 3 grounding pins in position :

OR SPECIFICATION A1= Row: a-b-c Cavity: 32

rev	ecn no	dr	date
B	-	ROU	1999/11/30
C	LS05-004	JTA	2005/02/26
D	LS06-0095	LGO	2006/06/24
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

TERMINATION

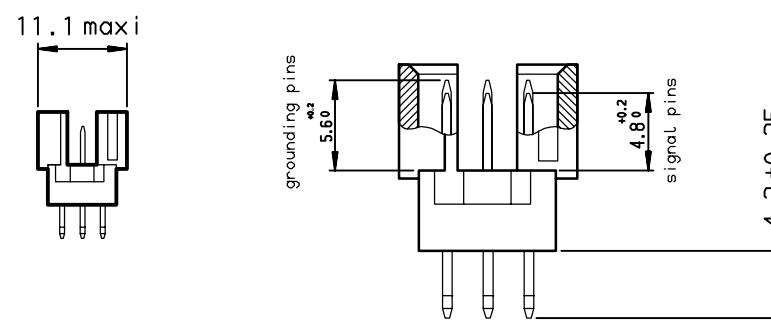

TIN LEAD PART NUMBER

PART NUMBER

86093967894755130E1

LEAD FREE PART NUMBER

PART NUMBER

86093967894755A1LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1998/03/19	ANGULAR	0.X	± 0.1
Eng	TARON	1998/03/19	LINEAR	0.XX	± 0.1
Chr	LEGARE	1998/03/19		0.XXX	± 0.1
Appr	LEGARE	1998/03/19	Product family	DIN 8609	ECN LS06-0095
				Spec ref	-
				size	A3
				Scale	1.5
				Rev.	
FCJ		REVERSE MALE 3 ROW 96 CONTACTS		dwg no	C-8609-0703
		NETAS code A9903096		Rev.	D
		catalog no			
		-			
		CUSTOMER		sheet	1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86093967894755AILF](#)