
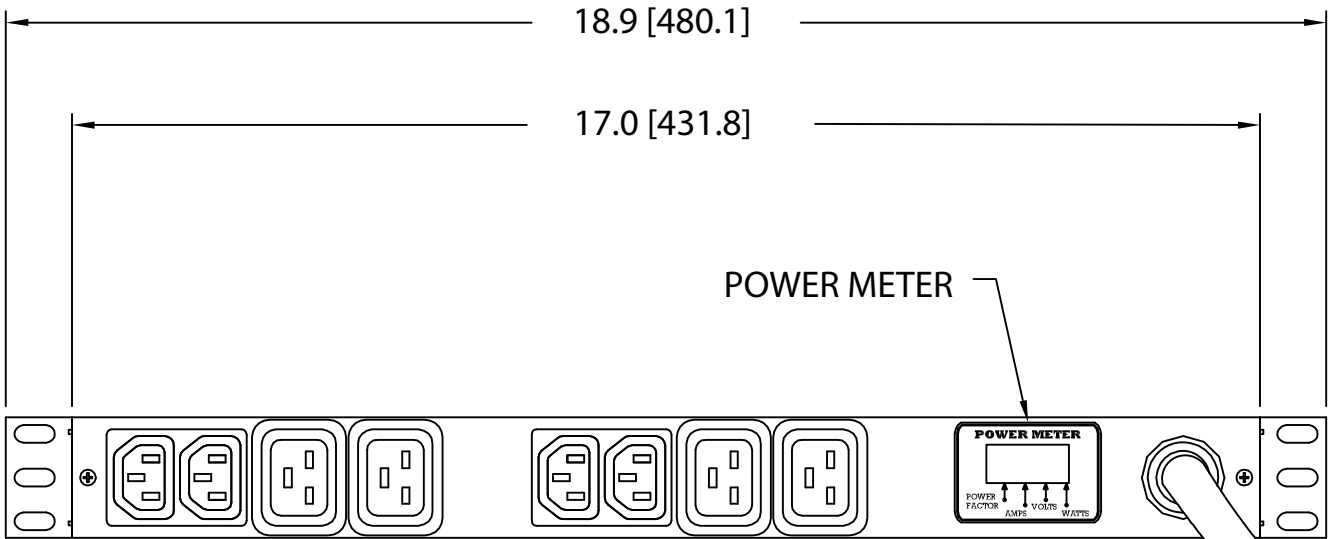


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


- NOTES:
1. IDENTIFICATION: 1RU HORIZONTAL, MIXED (4) C-13 & (4) C-19, METERED 208V / 20A / SINGLE-PHASE POU
 2. ACCESSORY COMPONENTS:
 - (4) 10-32 x 1/2" MOUNTING SCREWS
 - (4) 12-24 x 1/2" MOUNTING SCREWS
 3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).

4. POWER METER - RED, 4-DIGIT LED CONTINUOUSLY SCROLLS THROUGH POWER FACTOR, AMPS, VOLTS (RMS), AND REAL POWER IN WATTS (RMS).
5. UL® & c-UL® LISTED 60950 AND NOM COMPLIANT.
6. RoHS COMPLIANT.
7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
8. MAXIMUM AVAILABLE INPUT POWER = 3.3 KW
9. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.

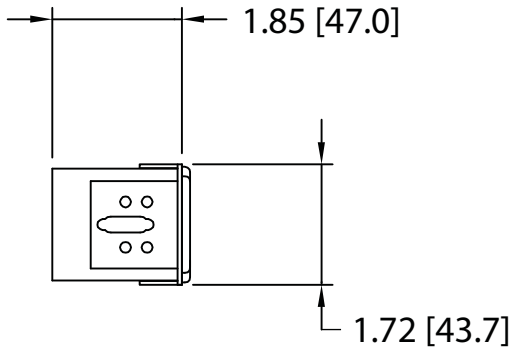

PANDUIT P/N	WEIGHT
HB1B1E0BA08W1	6 lb (2.7 kg)

10 FOOT INLET POWER CORD

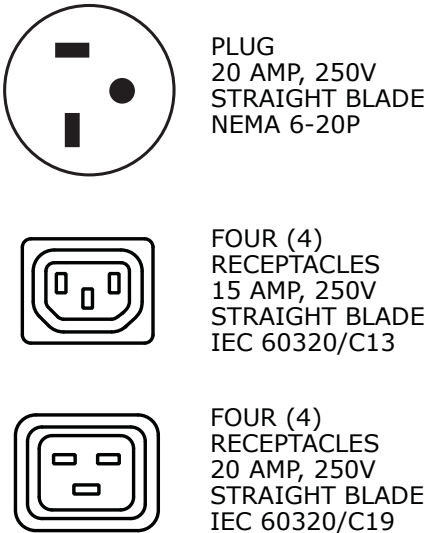

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
01A	9-5-12	PIP	MRWA	A. UPDATED NOTE #5 & 8. B. ADDED NOTE #9.	09V098CI				
00A	2-24-11	MAV	KRKE	RELEASED TO PRODUCTION	09V098CI				

MODEL FILENAME		09V098CI/01.PRT	
CAD FILENAME/LAYERS		09V098CI_DC/01A.PRT	
PANDUIT CORP TINLEY PARK, ILLINOIS			
1RU HORIZONTAL, MIXED (4) C-13 & (4) C-19, METERED POWER OUTLET UNIT CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED,	
INCHES	[METRIC - MILLIMETER]	ANGLE	
X.X +/- 0.03	X. +/- 0.8	ALL DIMENSIONS ARE GIVEN IN	
X.XX +/- 0.015	X.X +/- 0.4	INCHES, THIRD ANGLE PROJECTION	
X.XXX +/- 0.005	X.XX +/- 0.13		
DRAWN BY		SCALE	
MAV		NONE	
DATE		DRAWING NO.	
2-24-11		09V098CI	
CHK'D		DWG	
KRKE		B	
		SIZE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[HB1B1E0BA08W1](#)