

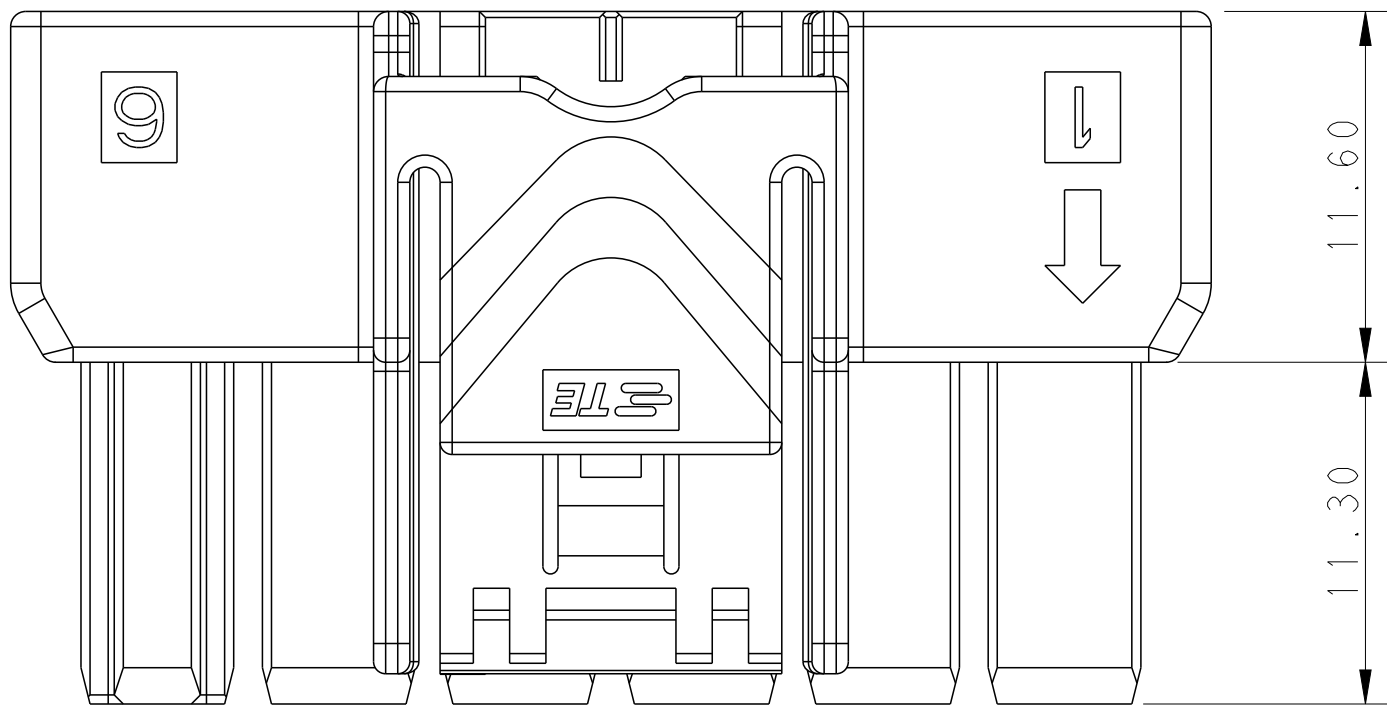
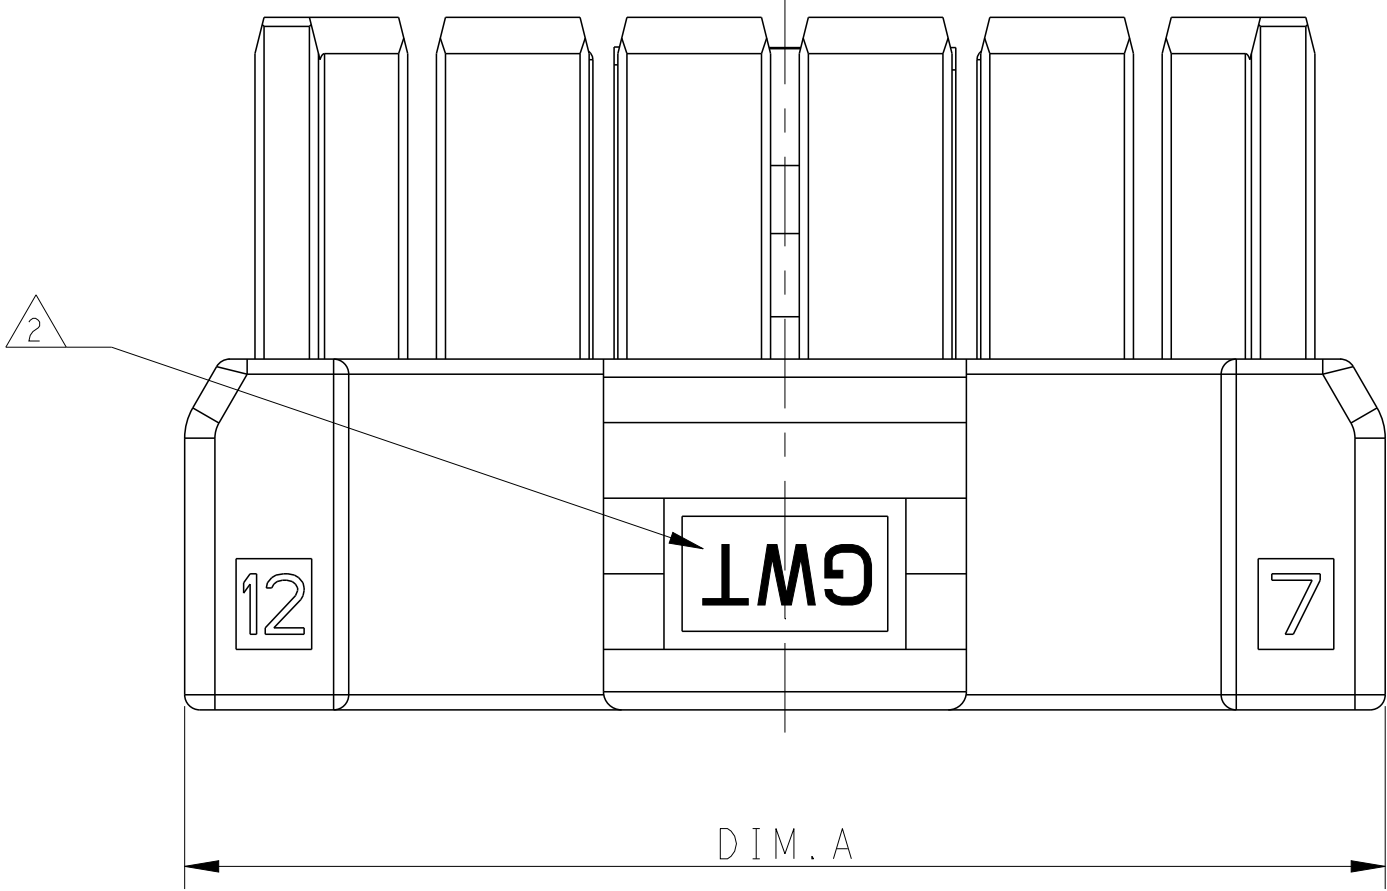
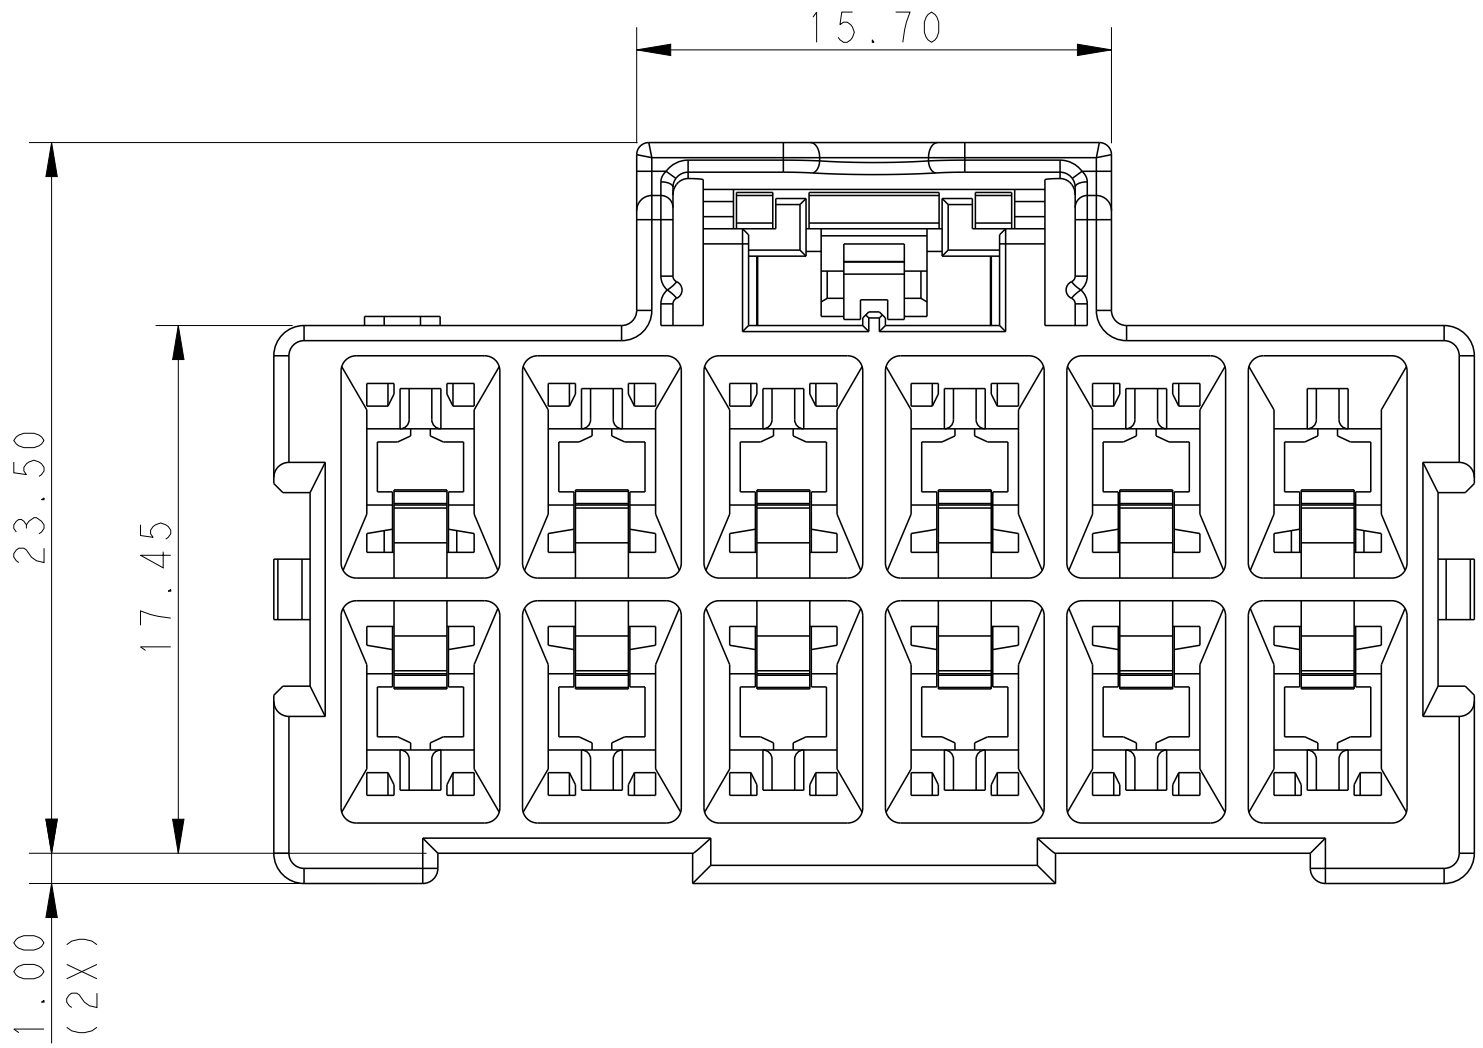


LOC		DIST		REVISONS			
P	LTR	DESCRIPTION			DATE	DWN	APVD
		B			22JUL2016	BW	GJ

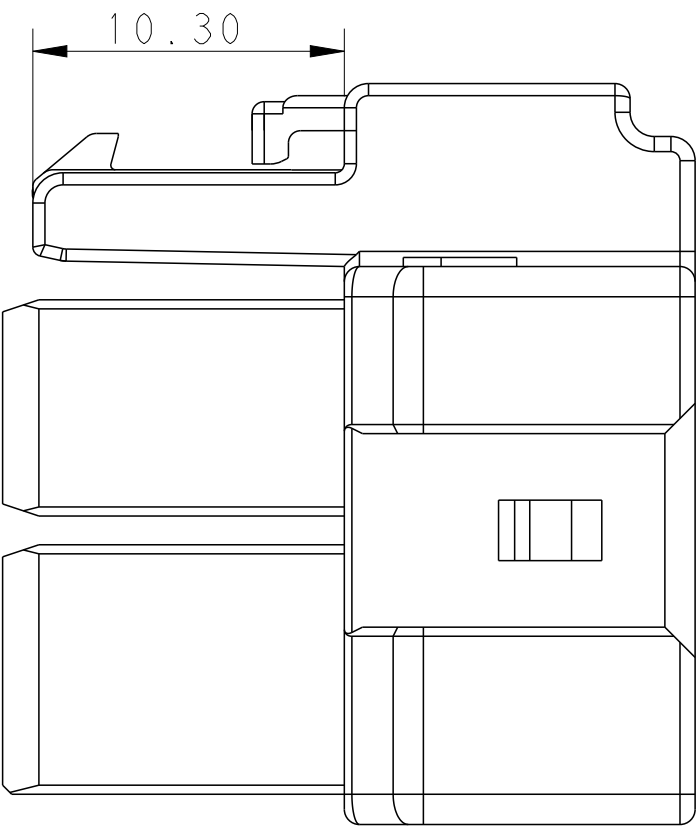

POS.	DIM.A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

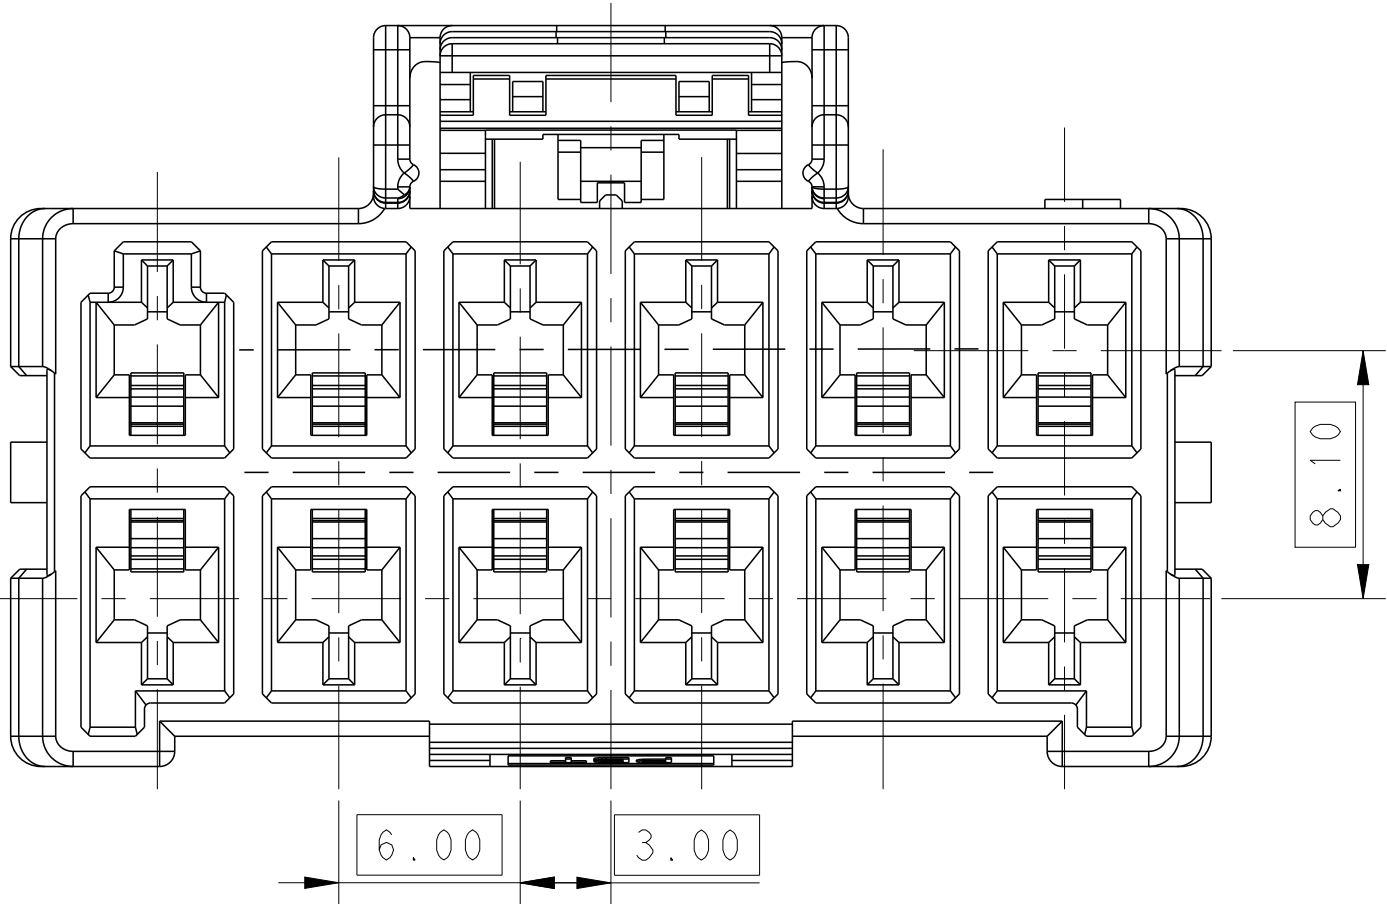

NOTE

1. MATERIAL:
- LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
- LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2. MATERIAL MARK:
- LEVEL A:GWT,LEVEL B:HWT


3. APPLICABLE CONTACT P/N
- RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*,2238066-*

4. MATING CONN, P/N
- CAP HSG: *-2232359/264-*
- TPA: *-1971778-*


5. This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.					DWN		TOMMY_WU		26MAR2013		 TE Connectivity	
					CHK		HAPYE_WU		26MAR2013			
DIMENSIONS:					APVD		YUHONG_MAO		26MAR2013		NAME	
mm					TOLERANCES UNLESS OTHERWISE SPECIFIED:							
					0 PLC		±				PRODUCT SPEC	
					1 PLC		±		0.35			
					2 PLC		±		0.25			
					3 PLC		±					
					4 PLC		±				SIZE	
					ANGLES		±		+			
					FINISH						CAGE CODE	
MATERIAL											DRAWING NO	
											RESTRICTED TO	
											A100779C=2232266	
											Customer Drawing	
											SCALE	
											SHEET 1 OF 2	
											REV B	


LOC		DIST		REVISONS			
P	LYR	DESCRIPTION			DATE	DWN	APVD
-	-	SEE SHEET 1			-	-	-

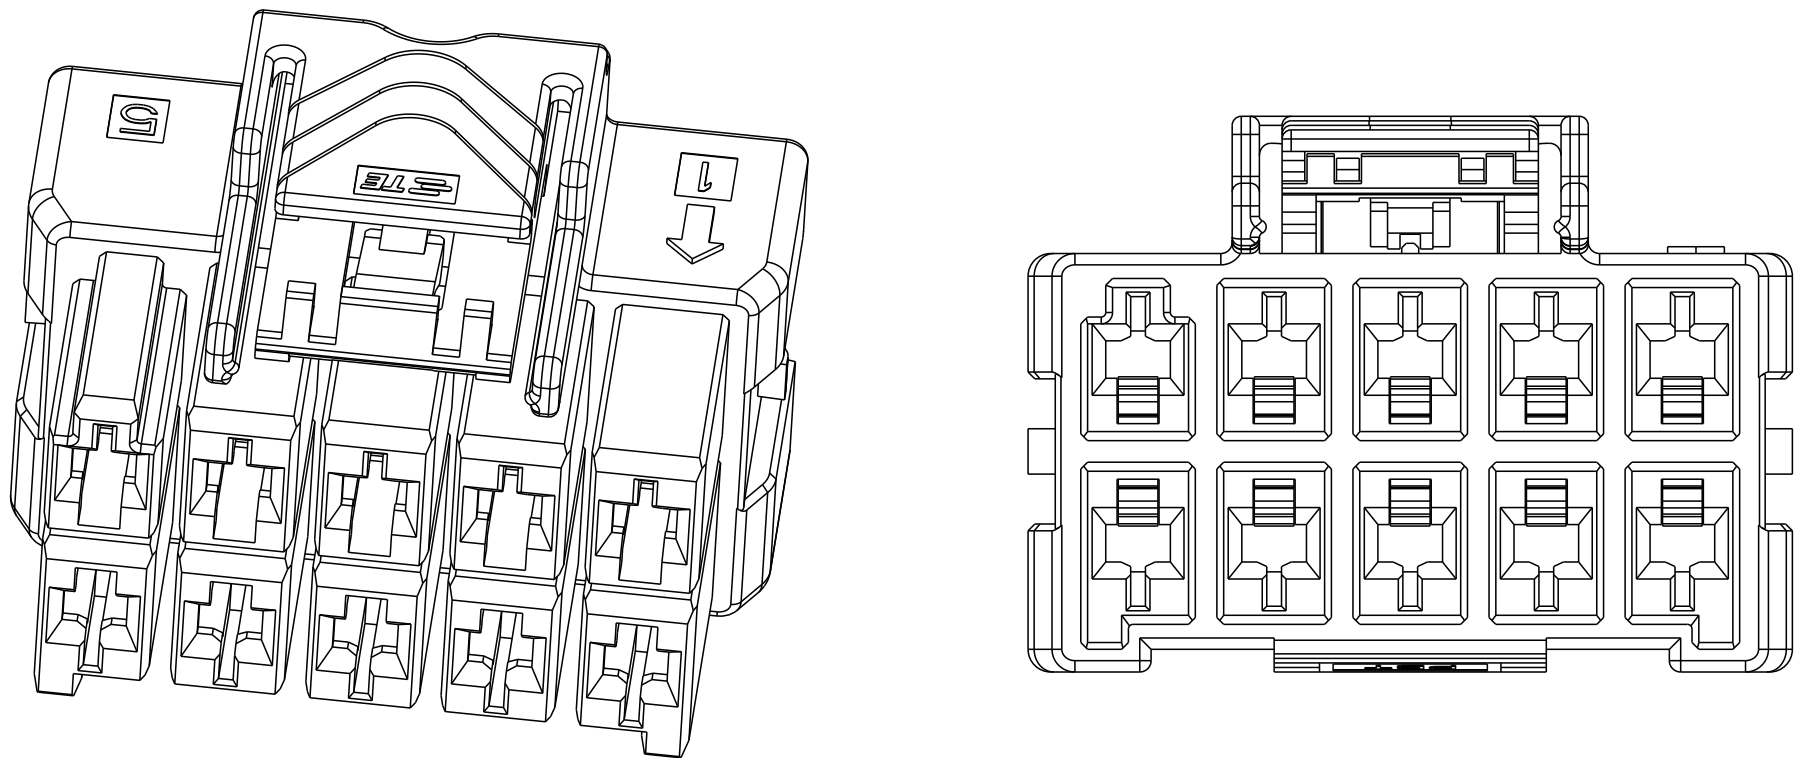


2*5 POSITIONS

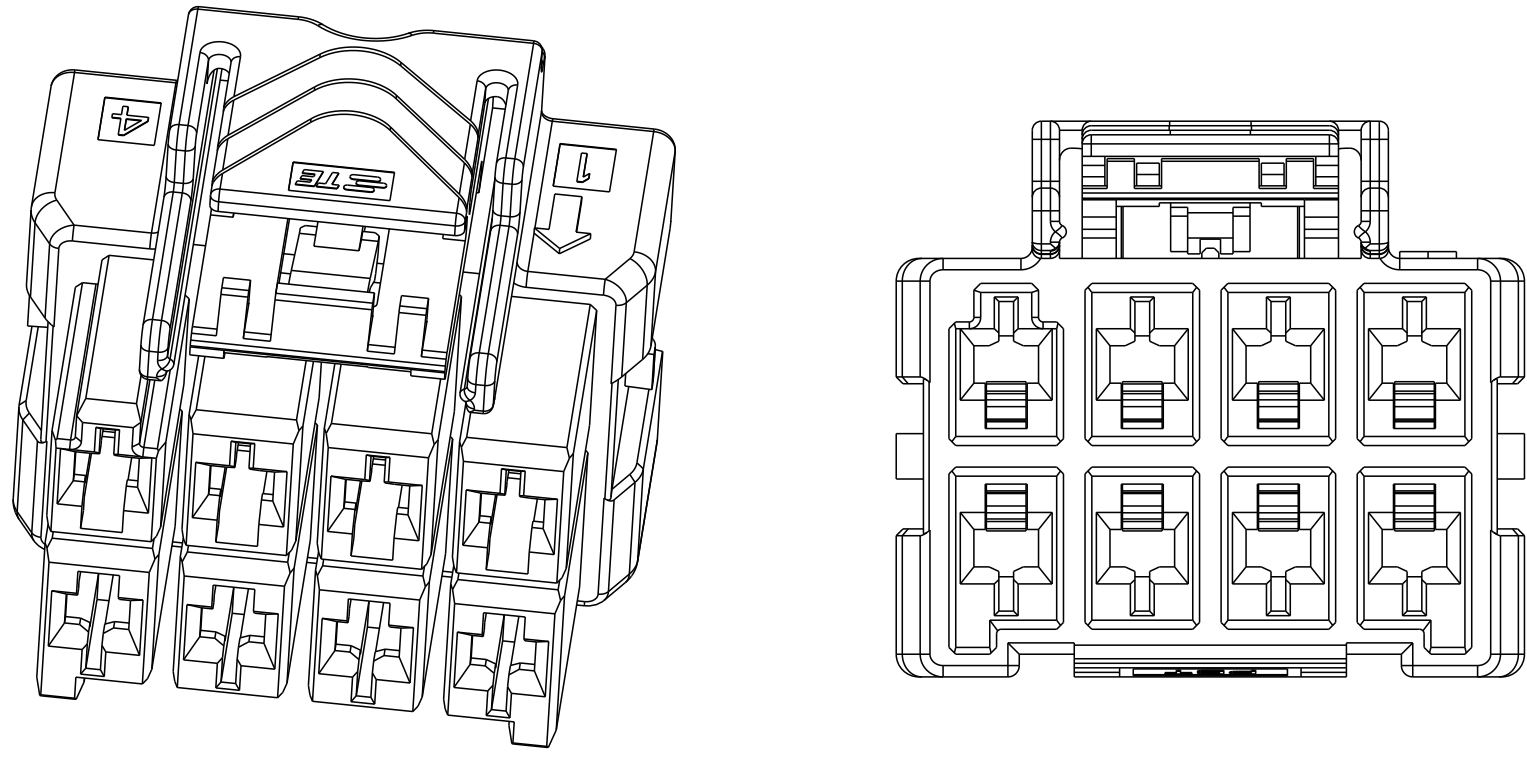


2*4 POSITIONS

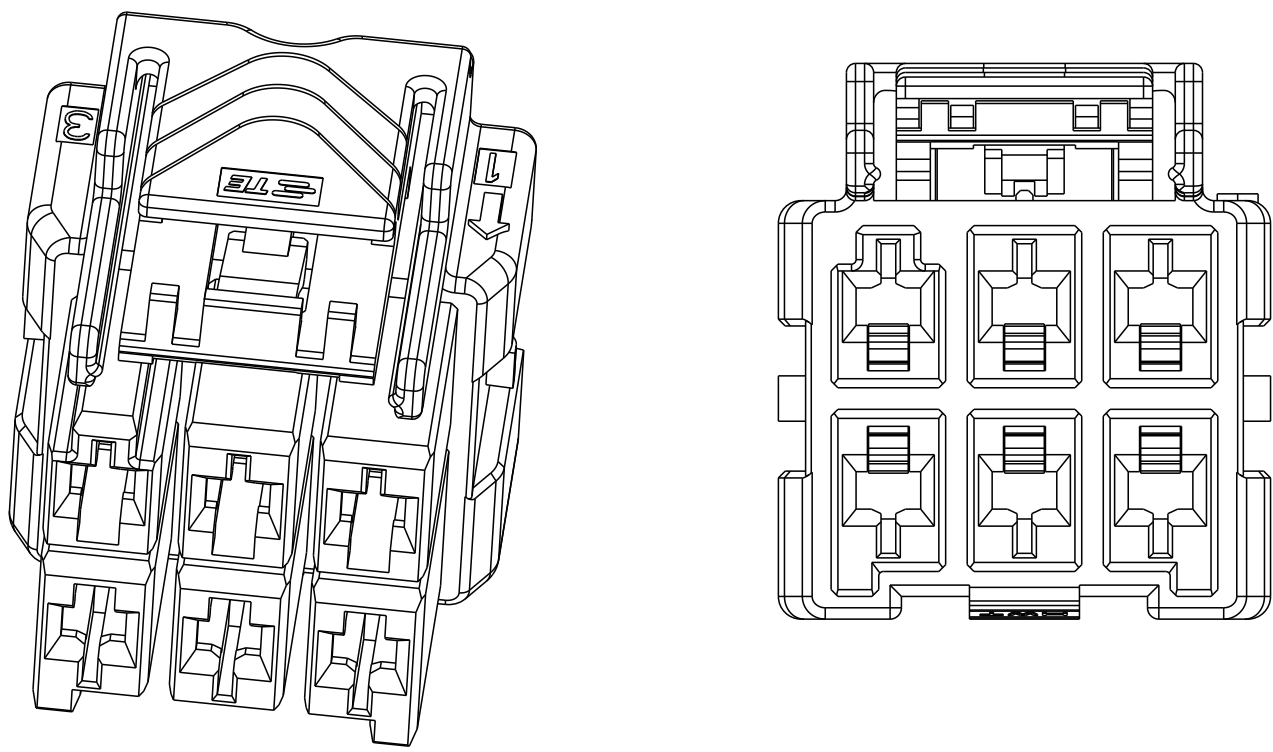


2*3 POSITIONS

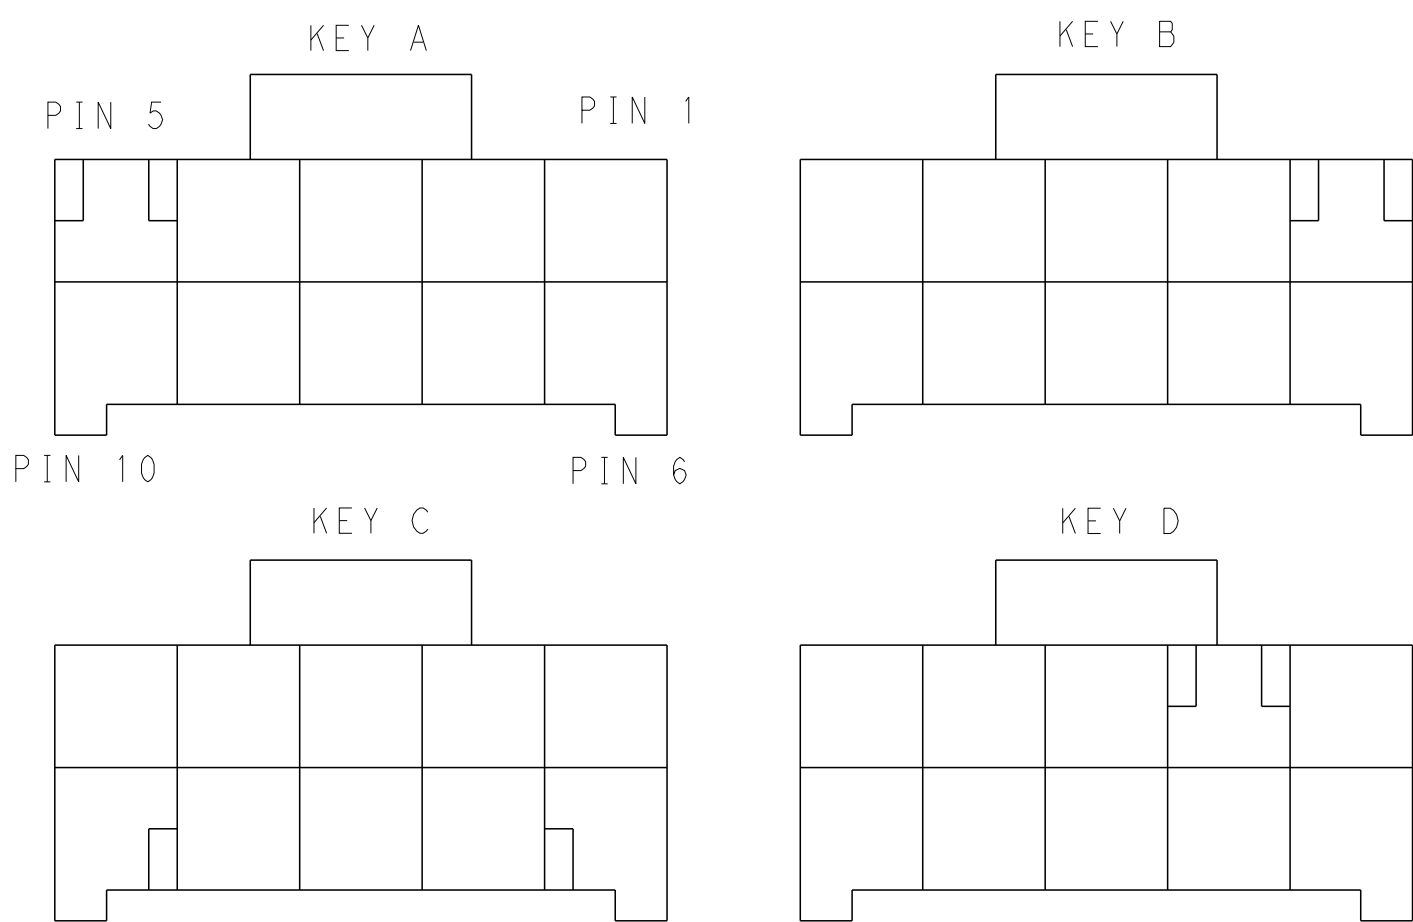


KEYING FOR 2*5 POS.

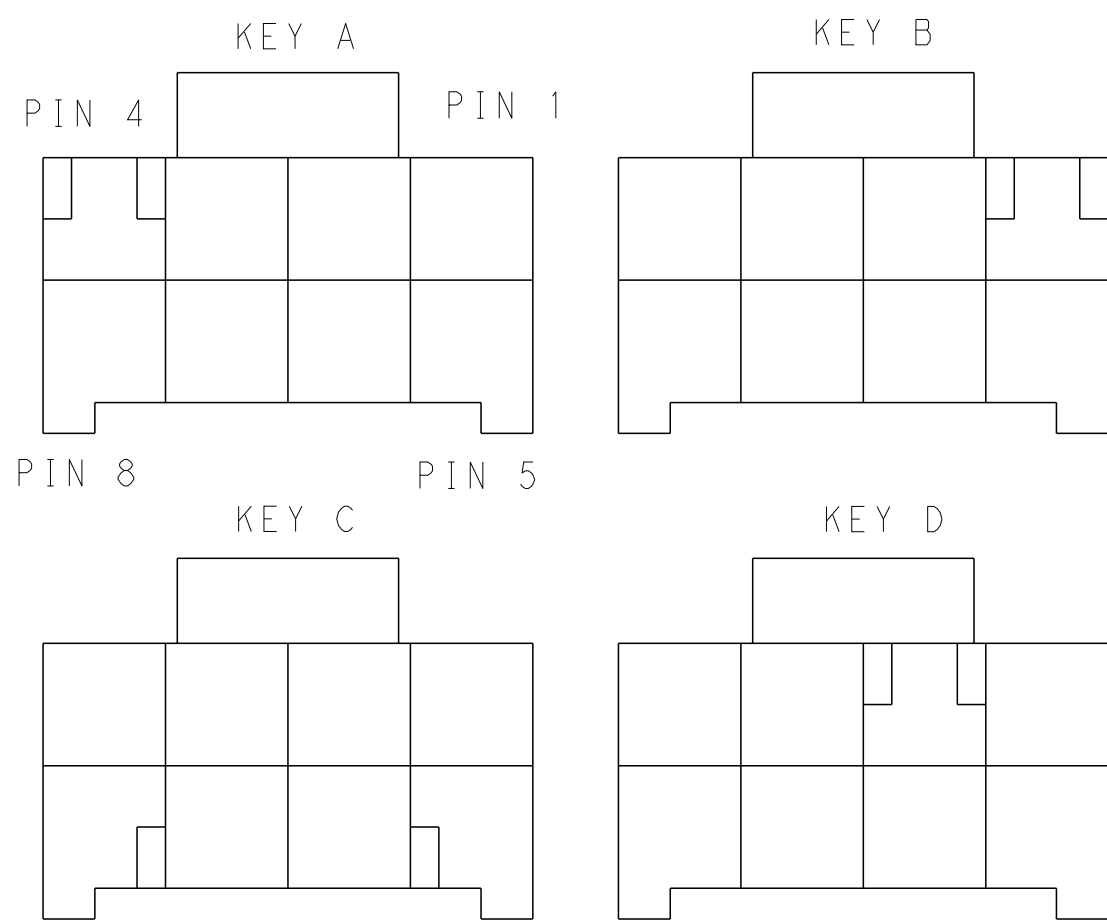


KEYING FOR 2*4 POS.

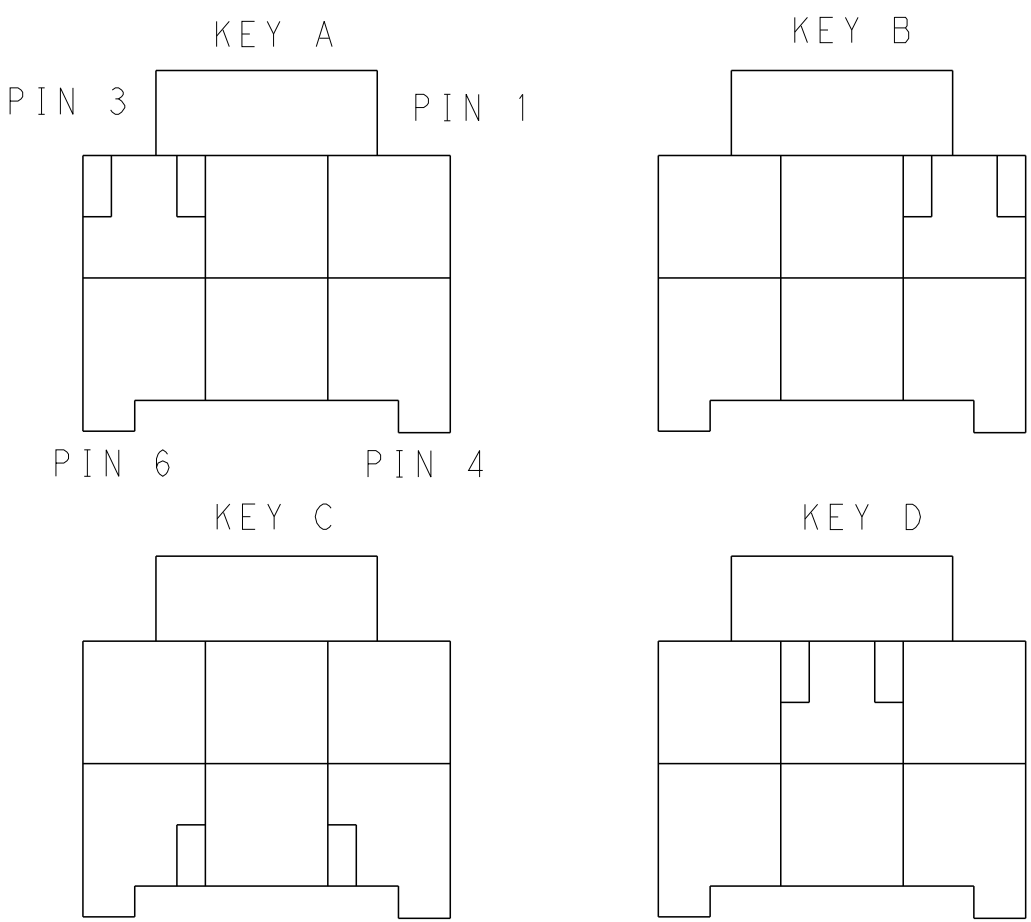

KEYING FOR 2*3 POS.

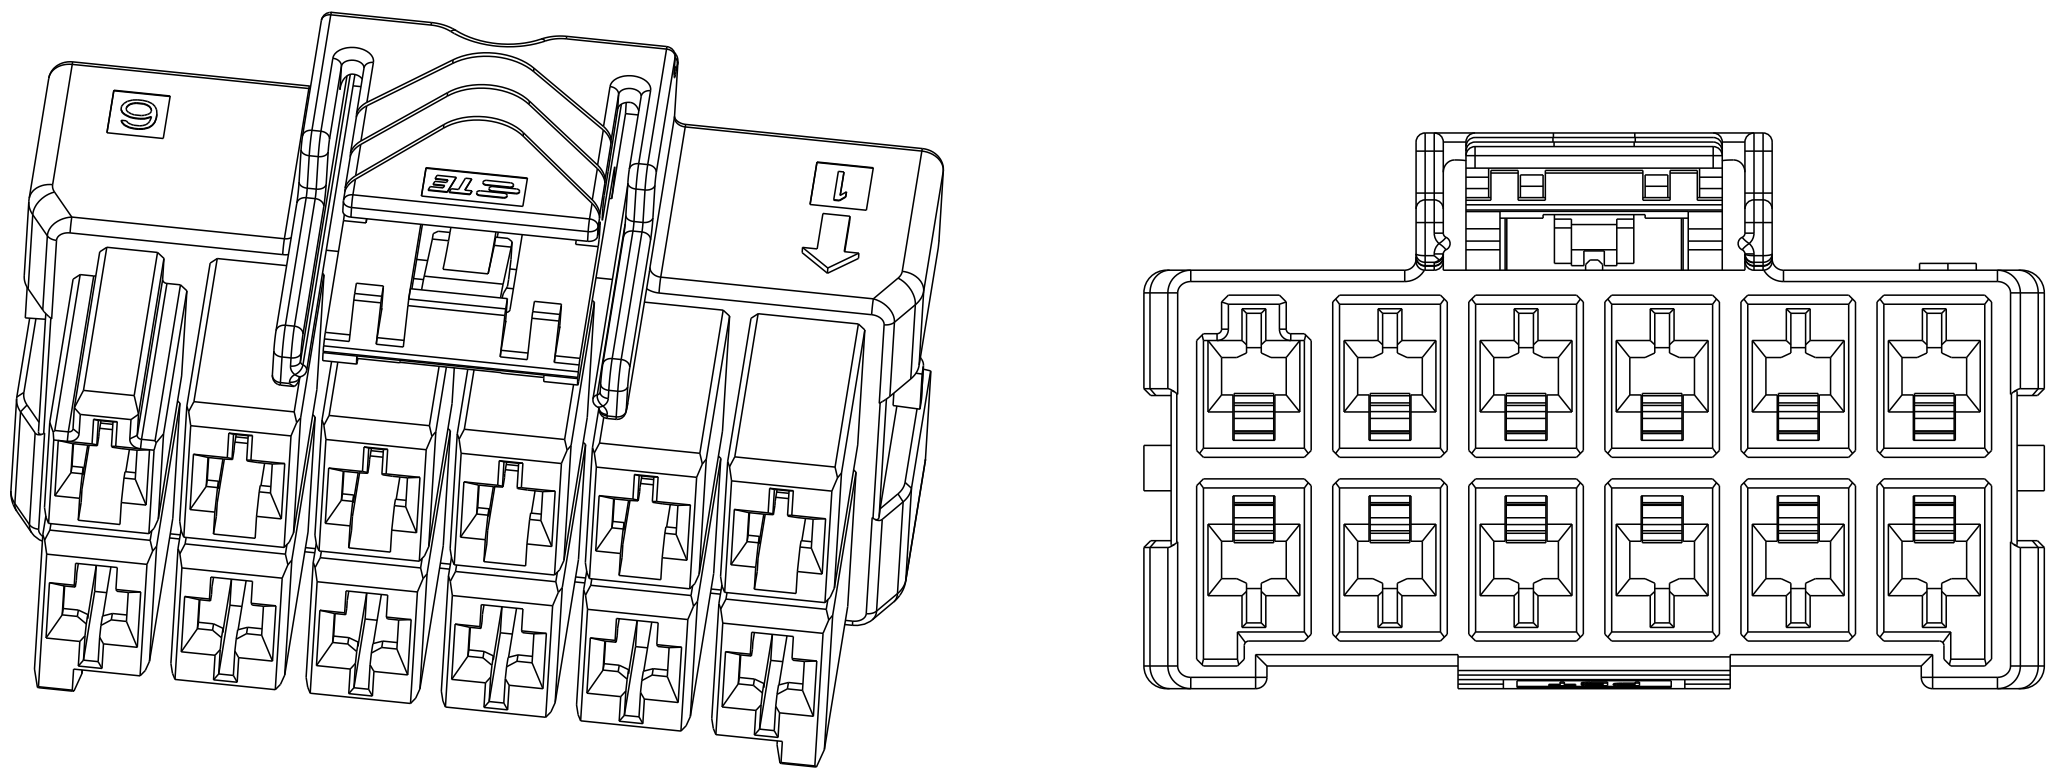

2*6 POSITIONS

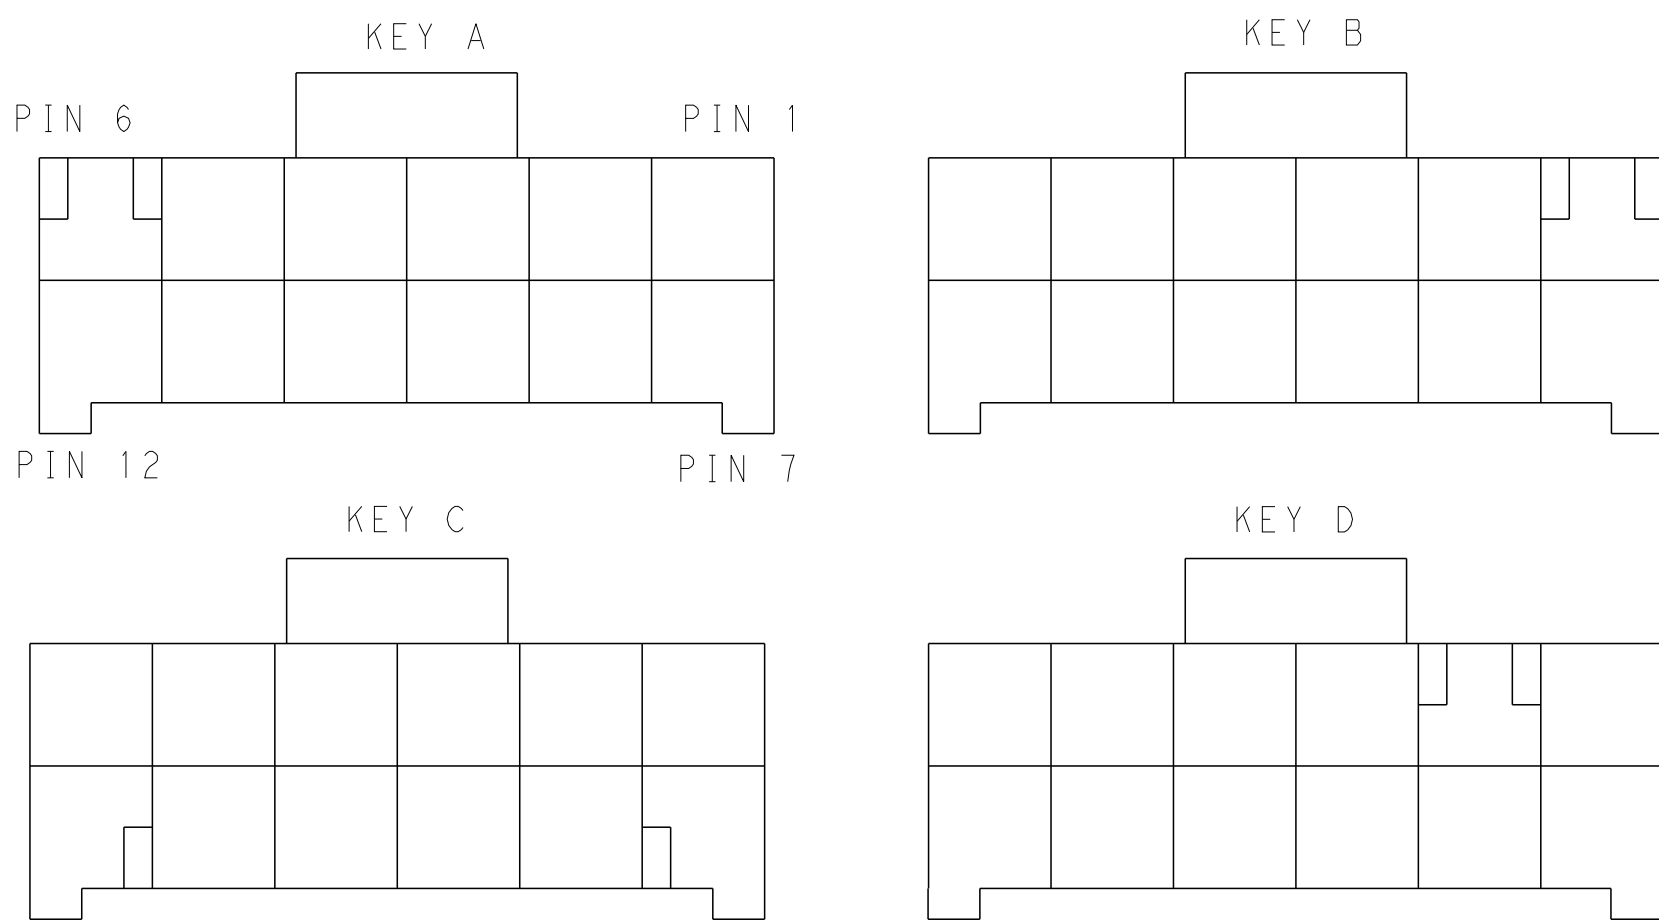

KEYING FOR 2*6 POS.

2*6	LEVEL A	DARK GREY	KEY A	5-2232266-6
		BROWN	KEY B	6-2232266-6
		GREEN	KEY C	7-2232266-6
		ORANGE	KEY D	8-2232266-6
2*5	LEVEL A	DARK GREY	KEY A	5-2232266-5
		BROWN	KEY B	6-2232266-5
		GREEN	KEY C	7-2232266-5
		ORANGE	KEY D	8-2232266-5
POS.	MATERIAL	COLOR	KEY	P/N

2*4	LEVEL A	DARK GREY	KEY A	5-2232266-4
		BROWN	KEY B	6-2232266-4
		GREEN	KEY C	7-2232266-4
		ORANGE	KEY D	8-2232266-4
2*3	LEVEL A	DARK GREY	KEY A	5-2232266-3
		BROWN	KEY B	6-2232266-3
		GREEN	KEY C	7-2232266-3
		ORANGE	KEY D	8-2232266-3
	LEVEL B	BLACK	KEY A	1-2232266-1
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN

26MAR2013

TOMMY_WU

CHK

26MAR2013

HAPYE_WU

APVD

26MAR2013

YUJHONG_MAO

NAME

PLUG HOUSING,DOUBLE ROW
POWER TRIPLE LOCK

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

MATERIAL

-

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

±-

±0.35

±0.25

±-

±-

±-

WEIGHT

-

Customer Drawing

SCALE

SHEET 2 OF 2

REV B

TE Connectivity

A100779C=2232266

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-2232266-3](#)