

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0527461171

Status:


Active

Overview:

FFC-FPC (SMT)

Description:

Easy-On FFC/FPC Connector, 0.50mm Pitch, Slider Series, Right-Angle, Bottom Contact, 2.00mm Height, 11 Circuits, Gold Plating

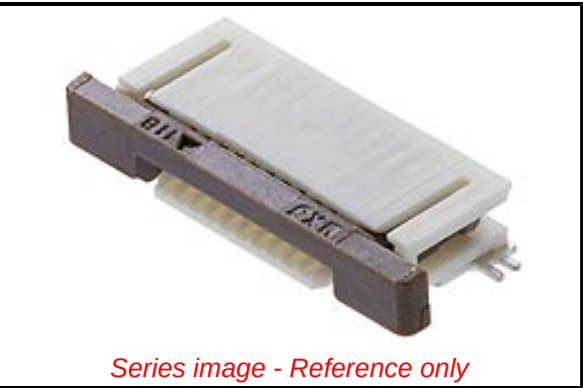

Documents:

3D Model

Drawing (PDF)

Product Specification PS-52746-015-001 (PDF)

Packaging Specification SPK-52746-002-001 (PDF)

RoHS Certificate of Compliance (PDF)

Product Literature (PDF)

|                                |                                |
|--------------------------------|--------------------------------|
| Agency Certification           |                                |
| CSA                            | LR19980                        |
| UL                             | E29179                         |
| General                        |                                |
| Product Family                 | FFC/FPC Connectors             |
| Series                         | 52746                          |
| Overview                       | FFC-FPC (SMT)                  |
| Product Literature Order No    | 987651-8061                    |
| Product Name                   | Easy-On                        |
| Series Name                    | Slider                         |
| UPC                            | 822348157372                   |
| Physical                       |                                |
| Actuator Type                  | Slider                         |
| Circuits (Loaded)              | 11                             |
| Contact Position               | Bottom                         |
| Durability (mating cycles max) | 20                             |
| Flammability                   | 94V-0                          |
| Mated Height                   | 2.00mm                         |
| Material - Metal               | Phosphor Bronze                |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Gold                           |
| Net Weight                     | 150.538/mg                     |
| Number of Rows                 | 1                              |
| Orientation                    | Right Angle                    |
| PCB Locator                    | No                             |
| PCB Mounting                   | Surface Mount                  |
| PCB Retention                  | Yes                            |
| Packaging Type                 | Embossed Tape on Reel          |
| Pitch - Mating Interface       | 0.50mm                         |
| Polarized to PCB               | Yes                            |
| Stackable                      | No                             |
| Temperature Range - Operating  | -40° to +85°C                  |
| Wire/Cable Type                | FFC/FPC                        |
| Electrical                     |                                |
| Current - Maximum per Contact  | 0.5A                           |
| Voltage - Maximum              | 50V                            |
| Material Info                  |                                |
| Reference - Drawing Numbers    |                                |
| Packaging Specification        | SPK-52746-002-001              |
| Product Specification          | PS-52746-015-001               |
| Sales Drawing                  | SD-52746-024, SD-52746-025-001 |

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/61/2018 (27 June

2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

52746 Series

This document was generated on 10/30/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[52746-1171](#)