

Tactile Switches



- **Compact size 6 x 6 mm**
- **Variety of actuator lengths**
- **Choice of actuation force**
- **RoHS compliant and compatible**

- **Consumer products**
- **Instrumentation**
- **Computer products**
- **Industrial**

FUNCTION: Momentary action
CONTACT ARRANGEMENT: SPST, N.O.
TERMINALS: PC pins

ACTUATION FORCE: 130 grams, 160 grams, 200 grams, 260 grams
LIFE EXPECTANCY: 100.000 operations.

CONTACT RATING: 50 mA @ 12 V DC.
DIELECTRIC STRENGTH: 250 V AC min.
CONTACT RESISTANCE: 100 mΩ max. initial.
INSULATION RESISTANCE: 10¹¹ Ω min.

OPERATING TEMPERATURE:

- Thru-hole and SMT with J actuator shape: -20°C to 70°C
- SMT (except for J actuator shape): -20°C to 85°C

SOLDERING: Preheating to 100°C for 45 sec. max. Keep flux flush with top surface of PCB; do not apply to component side of PCB and area where terminals are located. Soldering to 255°C for 5 sec. max. Clean by brushing on solder surface. Do not clean switch with solvents.

Bulk packaging.

Reels of 1,000 pieces for 4,3 and 5,0 mm height
 Reels of 700 pieces for 7,0 mm height
 Reels of 700 pieces for 7,3 mm height
 Reels of 500 pieces for 9,5 mm height
 Reels of 400 pieces for 13,0 mm height

NOTE: Specifications listed above are for switches with standard options.
For information on specific and custom switches, consult Customer Service Center.


Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.





PTS645 Series 6 mm Tact Switches

TERMINATION


S STRAIGHT




SCHEMATIC





PCB LAYOUT




T STRAIGHT WITH ESD PIN




SCHEMATIC





PCB LAYOUT

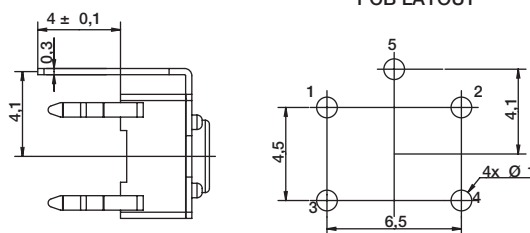


V VERTICAL



SCHEMATIC

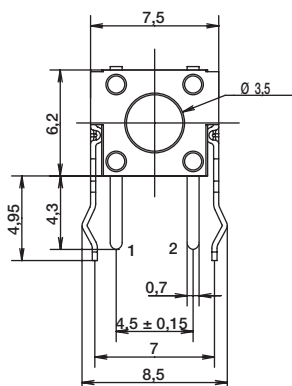

PCB LAYOUT







First Angle
Projection

PTS645 Series 6 mm Tact Switches

TERMINATION

SMT


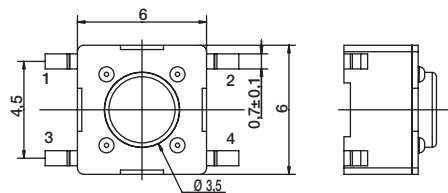



PCB LAYOUT



ACTUATOR SHAPE

J SQUARE ACTUATOR

VERTICAL THT - FOR 6,15MM LENGTH ONLY

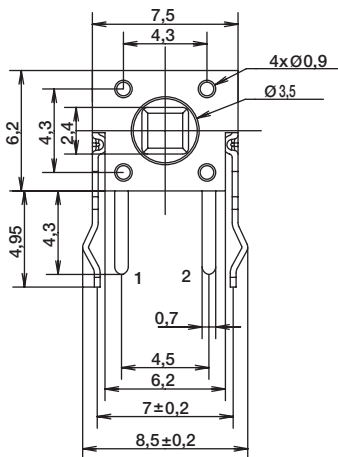



SCHEMATIC




RECOMMENDED PCB LAYOUT

ACTUATOR SHAPE


VERTICAL THT - FOR 7,3MM HEIGHT ONLY

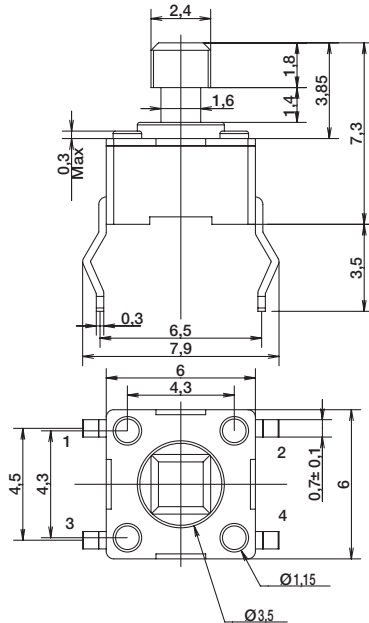



SCHEMATIC




RECOMMENDED PCB LAYOUT




STRAIGHT SMT - FOR 7,3MM HEIGHT ONLY

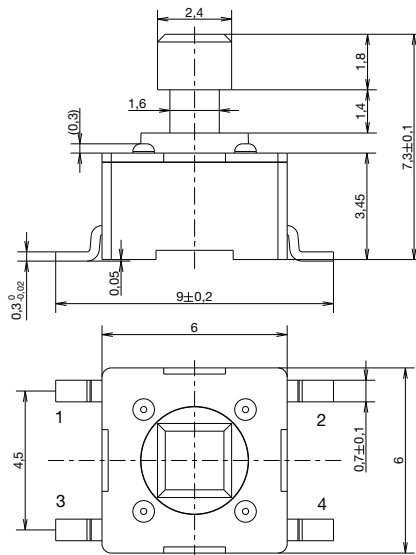

SCHEMATIC



RECOMMENDED PCB LAYOUT

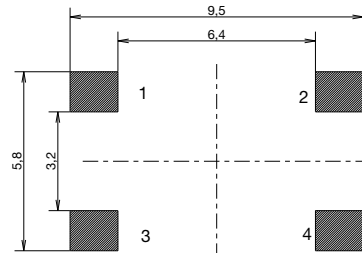

PTS645 Series 6 mm Tact Switches

ACTUATION FORCE

OPTION CODE	FORCE
L	130 grams Black
M	160 grams Blue
H	200 grams Gray
K	260 grams Red

ACTUATOR HEIGHT


Switch height from PCB for S and T only

OPTION CODE	DIMENSION H	TERMINATION	SCHEMATIC	
			Without EMC pin	With EMC pin
43	4,3 (.169)	Thru-hole and SMT		
50	5,0 (.197)	Thru-hole and SMT		
70	7,0 (.275)	Thru-hole and SMT		
95	9,5 (.374)	Thru-hole and SMT		
13	13,0 (.512)	SMT		

Switch length from front leads for V only

OPTION CODE	DIMENSION H	TERMINATION	SCHEMATIC	
			Without EMC pin	With EMC pin
31	3,15 (.124)	Vertical		
39	3,85 (.151)	Vertical		
58	5,85 (.230)	Vertical		
83	8,35 (.329)	Vertical		

TAPE & REEL FOR SMT VERSIONS

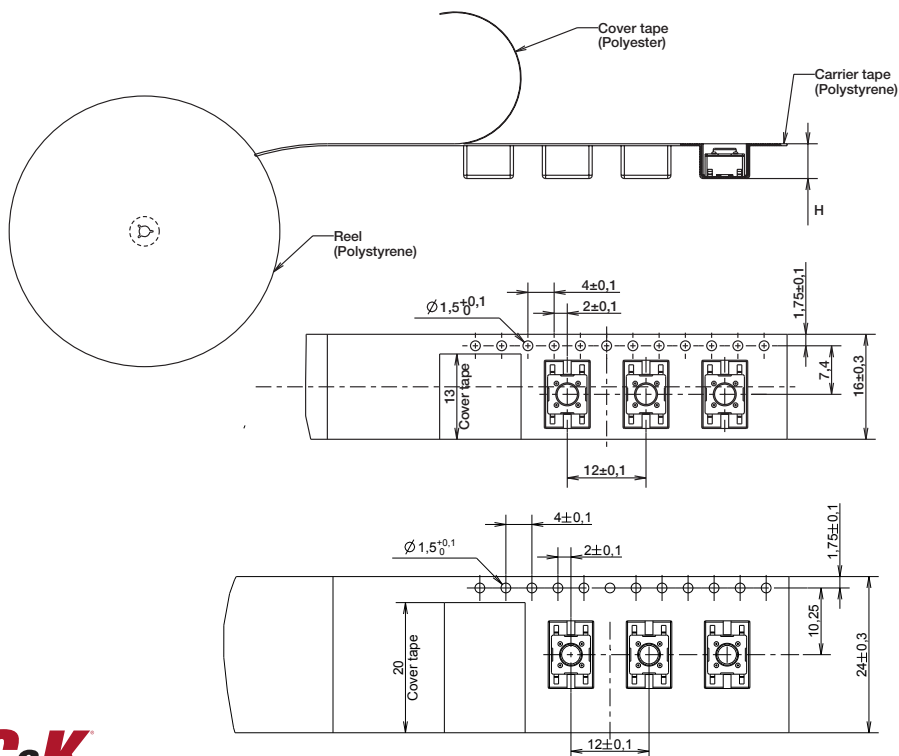

OPTION CODE	WIDTH TAPE	POCKET HEIGHT
43	16 ± 0.3	5.3
50	16 ± 0.3	5.3
70	16 ± 0.3	7.3
73	16 ± 0.3	7.6
95	24 ± 0.3	10.3
13	24 ± 0.3	13.3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

[PTS645TM43LFS](#) [PTS645TM50LFS](#) [PTS645TM70LFS](#) [PTS645TM95LFS](#) [PTS645TH95LFS](#) [PTS645TK43LFS](#)
[PTS645TK50LFS](#) [PTS645TK70LFS](#) [PTS645TK95LFS](#) [PTS645SJM73LFS](#) [PTS645SJK73LFS](#) [PTS645TJL73LFS](#)
[PTS645TJH73LFS](#) [PTS645TJK73LFS](#) [PTS645TL95LFS](#) [PTS645TH70LFS](#) [PTS645SK13SMTR92LFS](#)
[PTS645SK95SMTR92LFS](#) [PTS645SM95SMTR92LFS](#) [PTS645TH432LFS](#) [PTS645SM13SMTR92LFS](#)
[PTS645SM70SMTR92LFS](#) [PTS645SK70SMTR92LFS](#) [PTS645SJH73LFS](#) [PTS645SK43SMTR92LFS](#)
[PTS645SM43SMTR92LFS](#) [PTS645SH43SMTR92LFS](#) [PTS645SL50SMTR92LFS](#) [PTS645SM50SMTR92LFS](#)
[PTS645SH50SMTR92LFS](#) [PTS645SK43TRLFS](#) [PTS645SL43SMTR92LFS](#) [PTS645SK50SMTR92LFS](#)
[PTS645SL70SMTR92LFS](#) [PTS645SJK73-2 LFS](#) [PTS645TH70-2 LFS](#) [PTS645TH95-2 LFS](#) [PTS645TK50-2 LFS](#)
[PTS645TM50-2 LFS](#)