


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N	REVISED PER ECR-17-006536	14SEP2017	RS	SZ

D

C

B

A

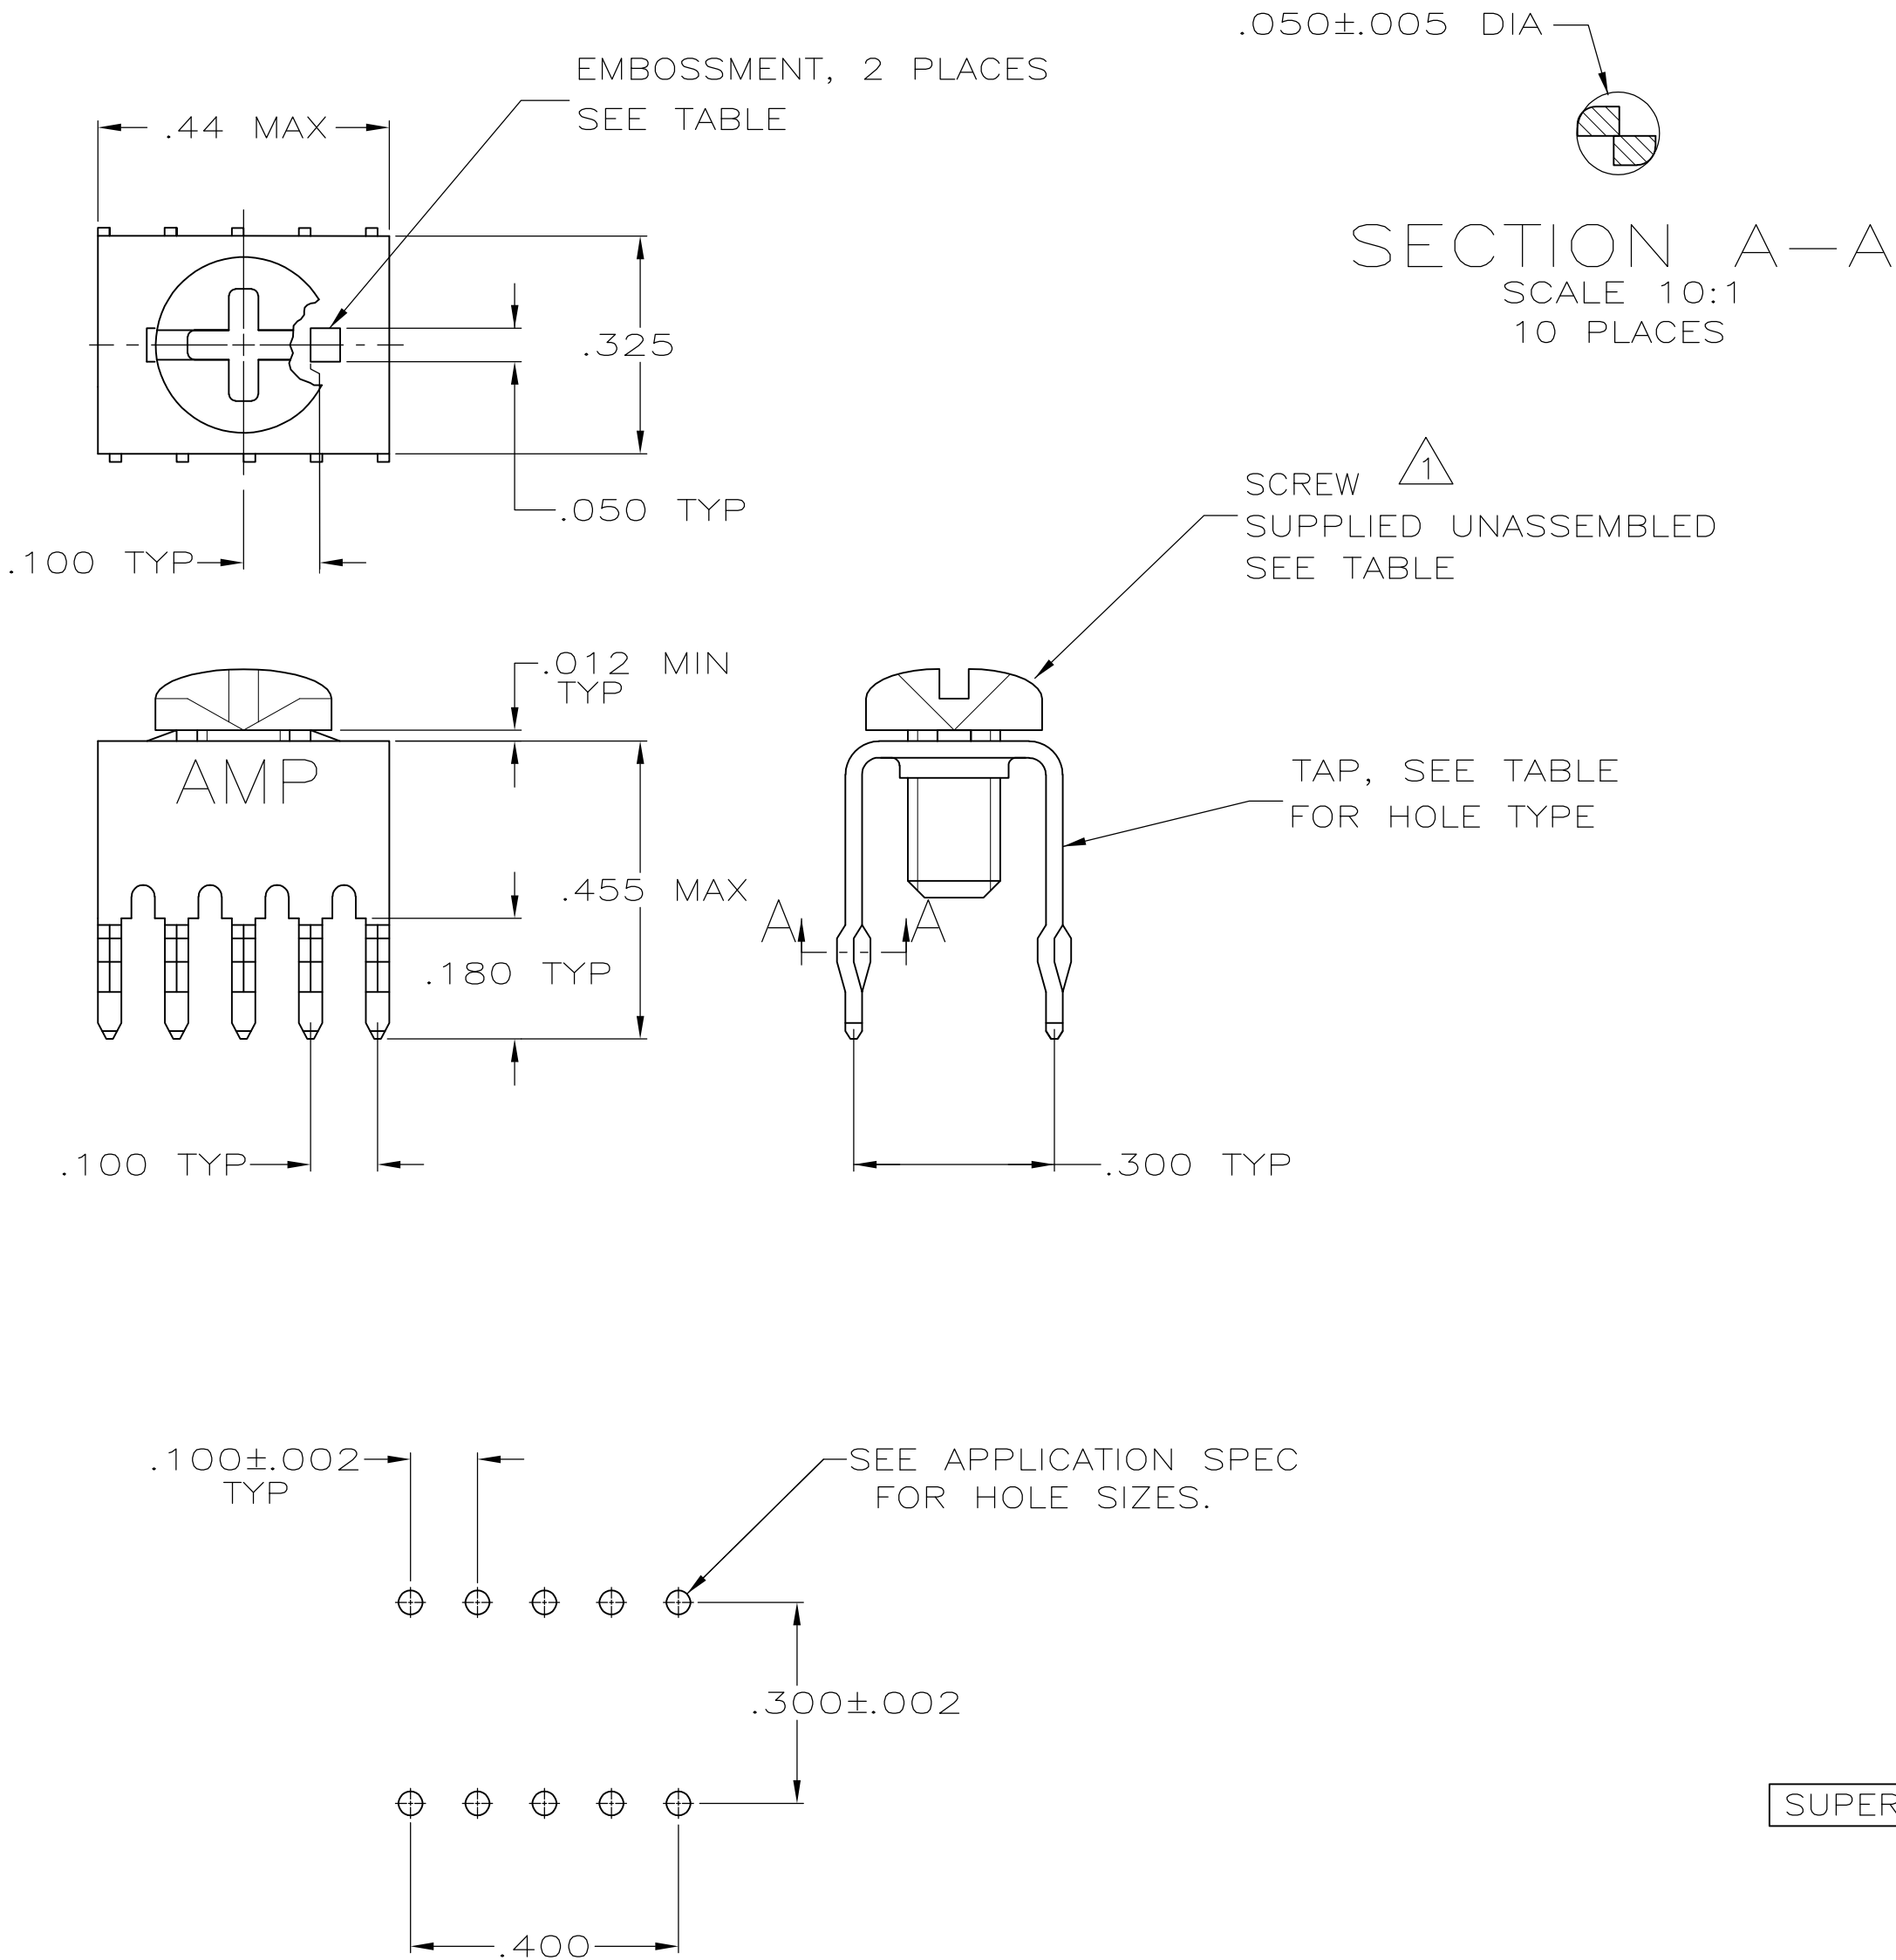

- ¹ TO PREVENT THREAD STRIPPING, SCREW TORQUE SHOULD NOT EXCEED 9 IN LBS.
- ² TAP HOLE IS 6-32UNC-2B, TWO MIN THREADS.
- ³ TAP HOLE IS M4 X 0.7, TWO MIN THREADS.
- ⁴ TAP: .000150 TIN-LEAD OVER .000050 NICKEL.
- ⁵ TAP: .000150 TIN OVER .000050 NICKEL.

OBSOLETE	5	2	993879-1	YES	9-55558-1
OBSOLETE		2	NO	YES	9-55558-0
OBSOLETE	4	3	NO	YES	1-55558-1
SUPERSEDED BY -4		2	993879-1	NO	55558-8
OBSOLETE		2	NO	NO	55558-7
OBSOLETE	4	2	993879-1	YES	55558-4
OBSOLETE		2	NO	YES	55558-3
	FINISH	HOLE TYPE	SCREW	EMBOSSMENT	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	1-11-88	TE Connectivity		
			CHK	1-11-88			
			APVD	1-11-88	NAME		
			PRODUCT SPEC				
			APPLICATION SPEC		TAP, POWER DISTRIBUTION		
			114-11000				
MATERIAL			WEIGHT	0.000000	SIZE	CAGE CODE	DRAWING NO
COPPER ALLOY 725.					A2	00779	C=55558
			FINISH	⁴ ⁵	RESTRICTED TO		
					-		
			CUSTOMER DRAWING		SCALE	SHEET	REV
					4:1	1 of 1	N

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55558-4](#)