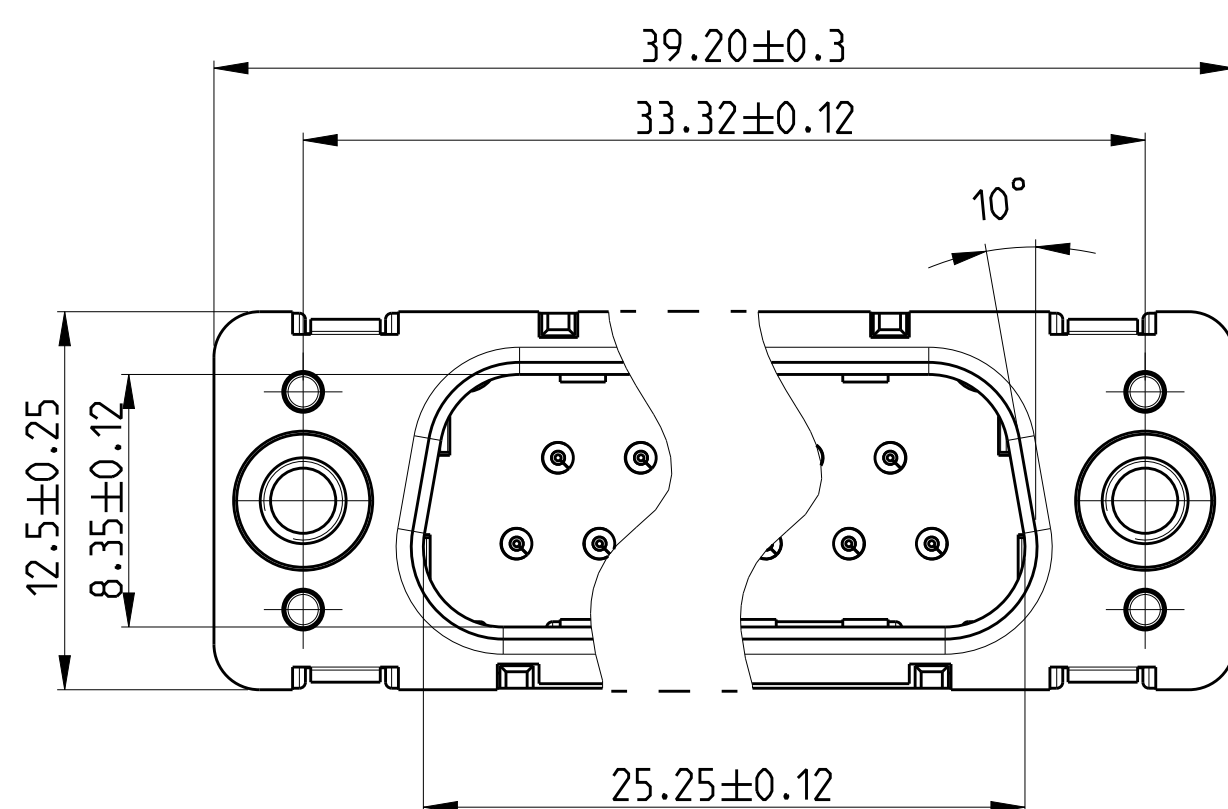
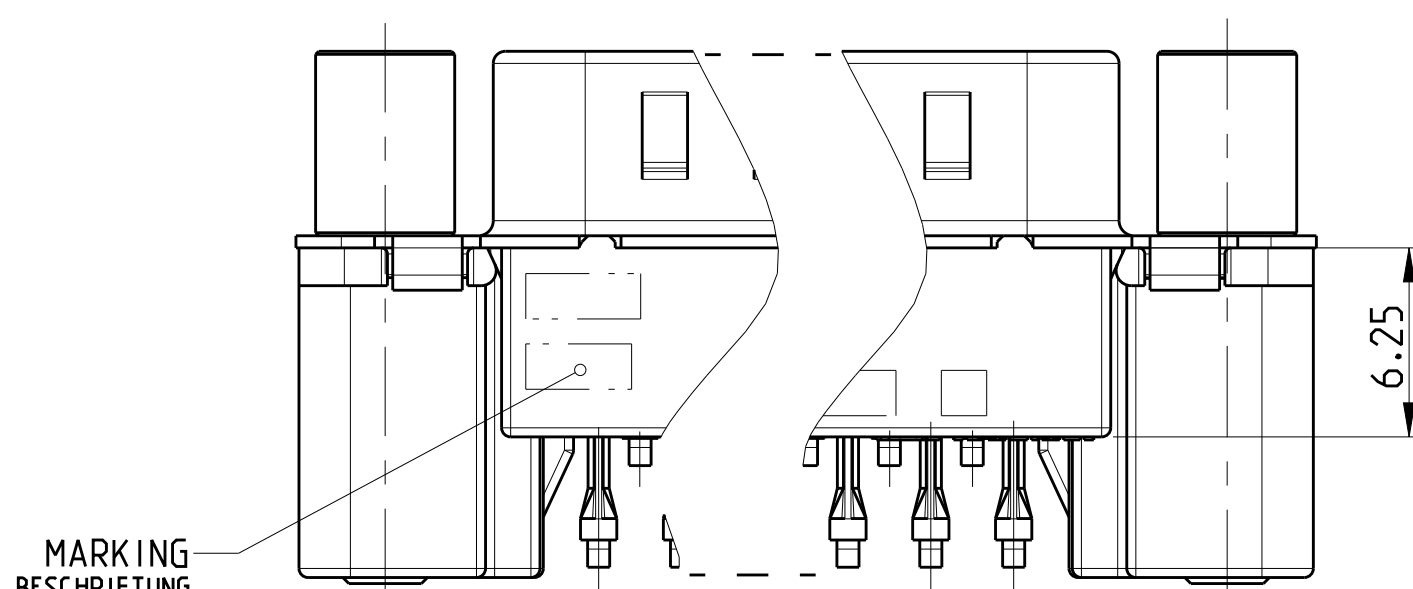
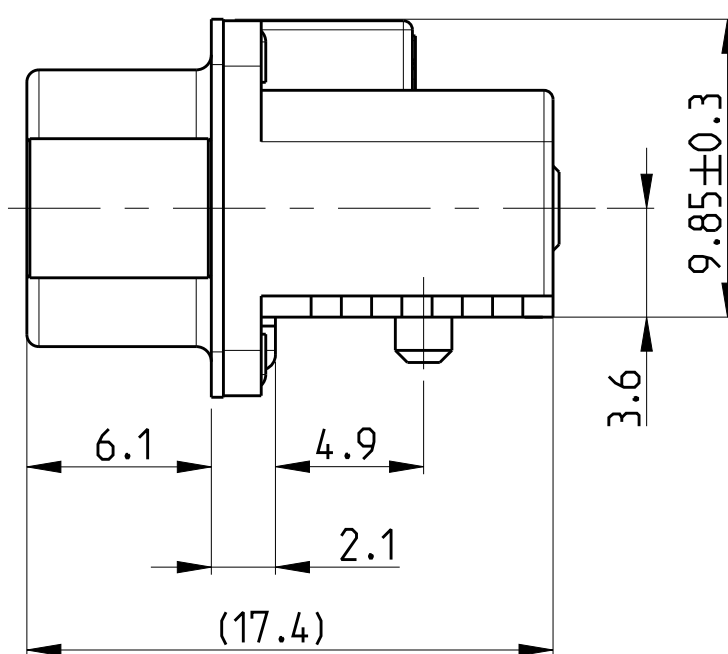
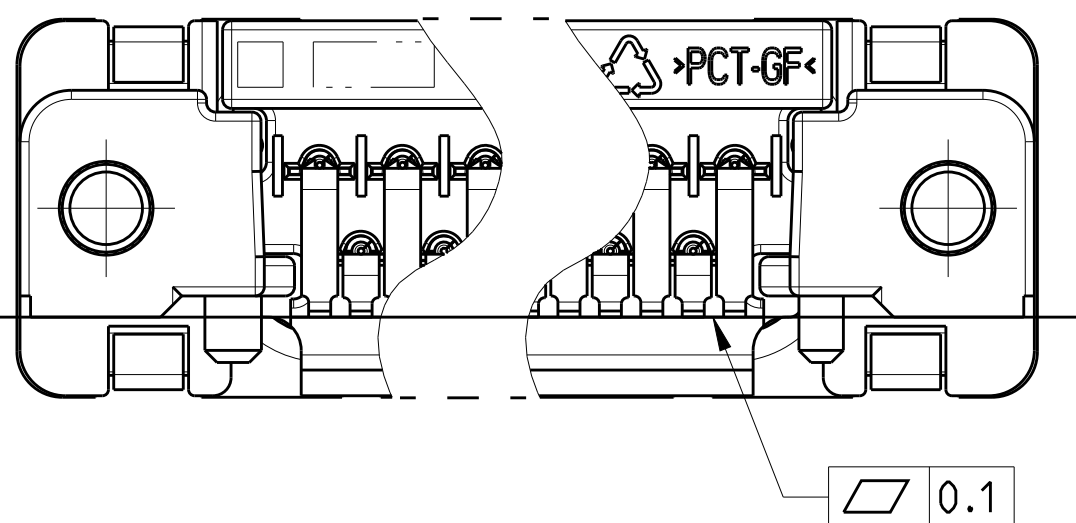
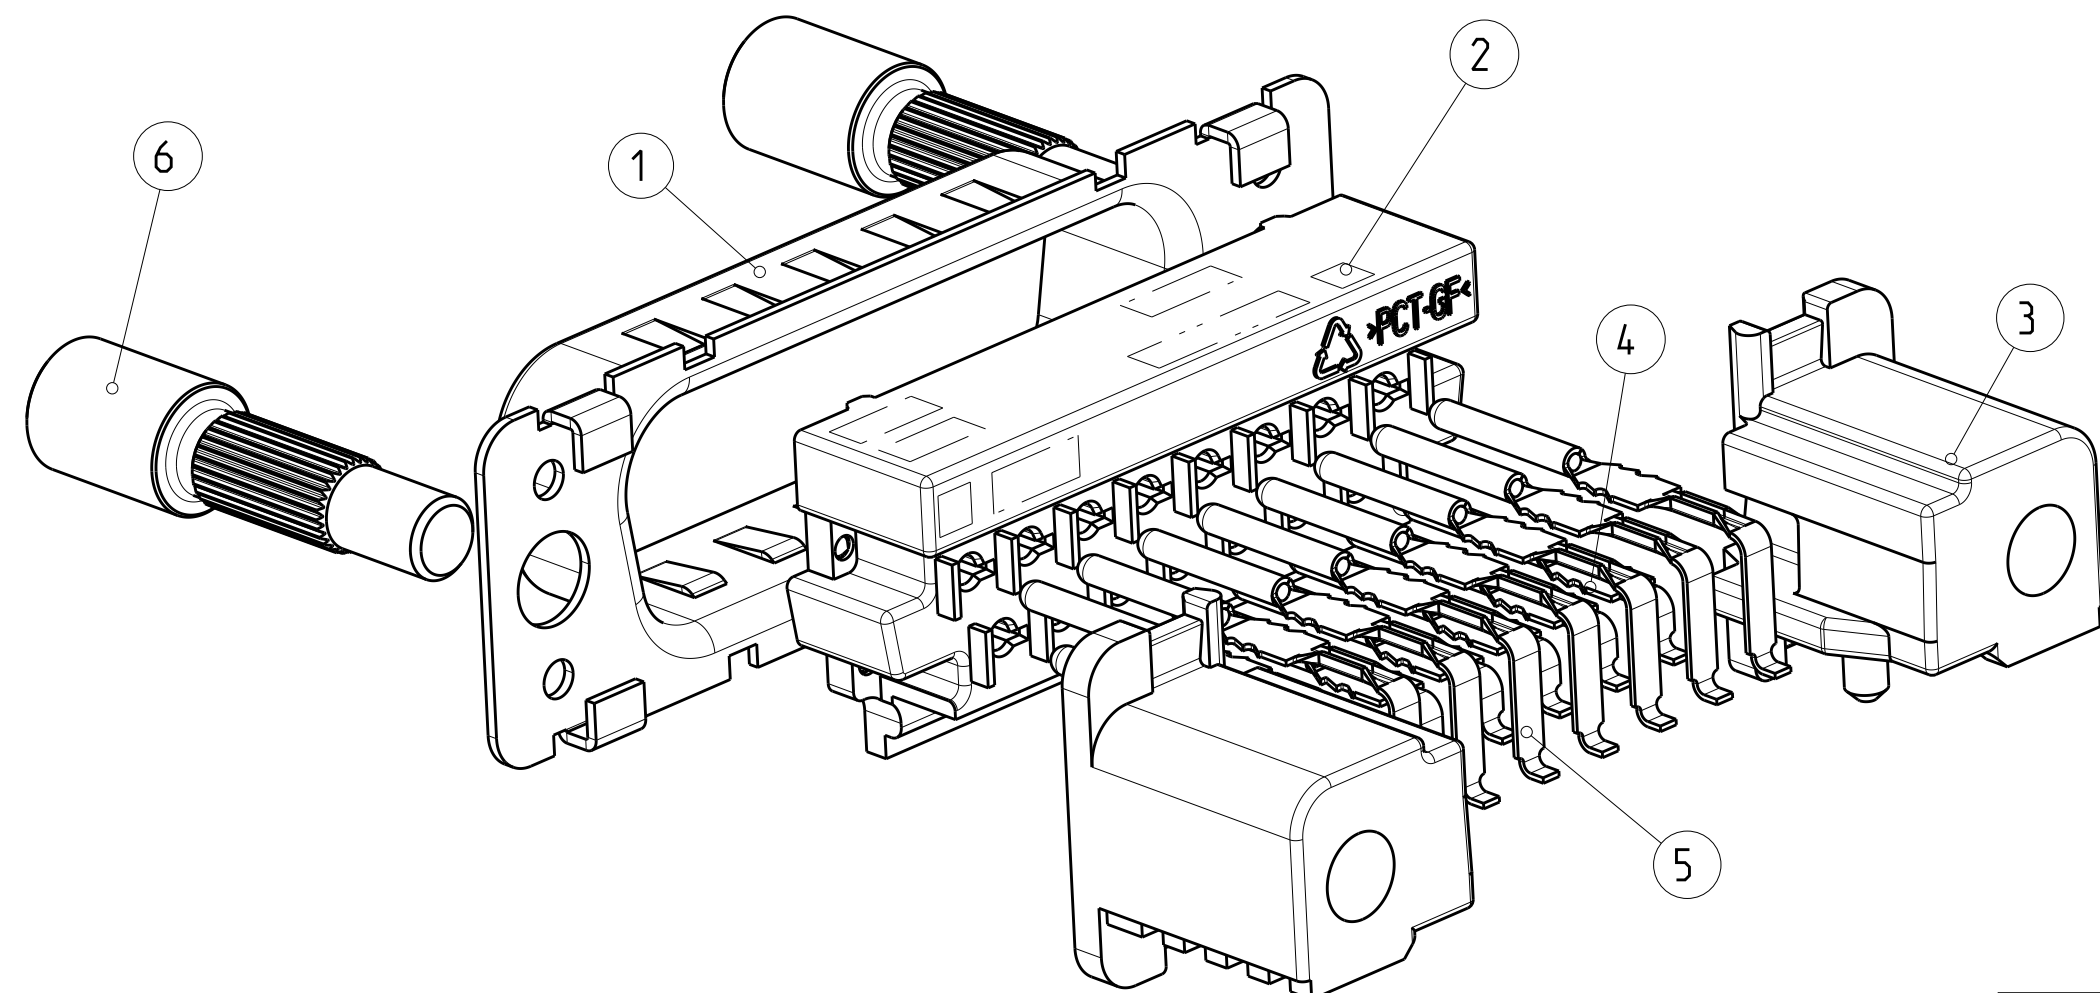
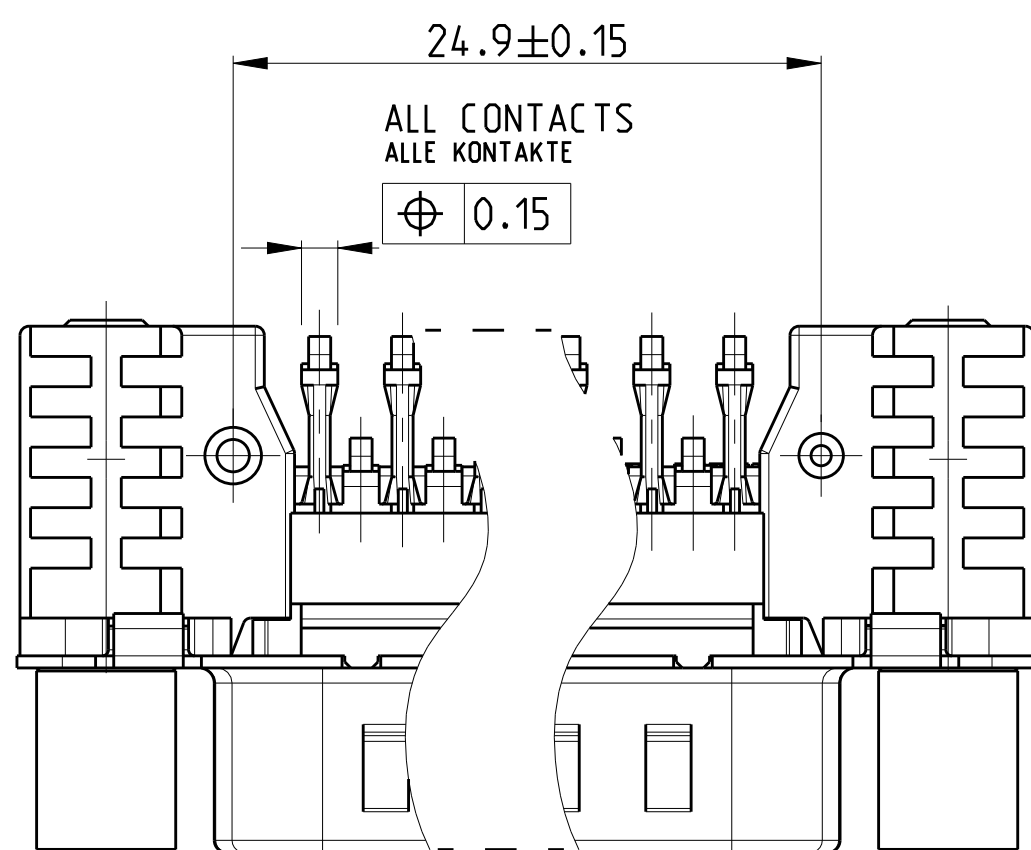


[illegible]


REMARKS:

- 1 CONTACT AREA: min. 0.8 μ m Au OVER 1.27 μ m Ni.
SOLDER AREA: 3-5 μ m Sn OVER min. 1.27 μ m Ni
- 2 PACKAGING SEE SHEET 2
- 3 CONNECTOR SUITABLE TO LEAD-FREE SMT SOLDER PROCESS
- 4 TIN OVER NICKEL
- 5 OBSOLETE

BEMERKUNGEN:

- 1 KONTAKTBEREICH: min. 0.8 µm Au UEBER 1.27 µm Ni,
LOETBEREICH: 3-5 µm Sn UEBER min. 1.27 µm Ni
- 2 VERPACKUNGSART SIEHE BLATT 2
- 3 STECKER GEEIGNET FÜR BLEIFREIES LOETEN
- 4 ZINN UEBER NICKEL
- 5 UEBERHOLT



5	PIN HEADER, 15 POS., STUD WITH THREAD M3	4-1740197-2	4-1740197-5
5	PIN HEADER, 15 POS., BRACKET WITH THREAD M3	2-1740197-2	2-1740197-5
	PIN HEADER, 15 POS., STUD WITH THREAD UNC 4-40	3-1740197-2	3-1740197-5
	PIN HEADER, 15 POS., BRACKET WITH THREAD UNC4-40	1-1740197-2	1-1740197-5
5	PIN HEADER, 15 POS., BRACKET WITH HOLE Ø3.1	0-1740197-2	0-1740197-5
	DESCRIPTION	SHELL PLATING: TIN OVER Ni	SHELL PLATING: Ni

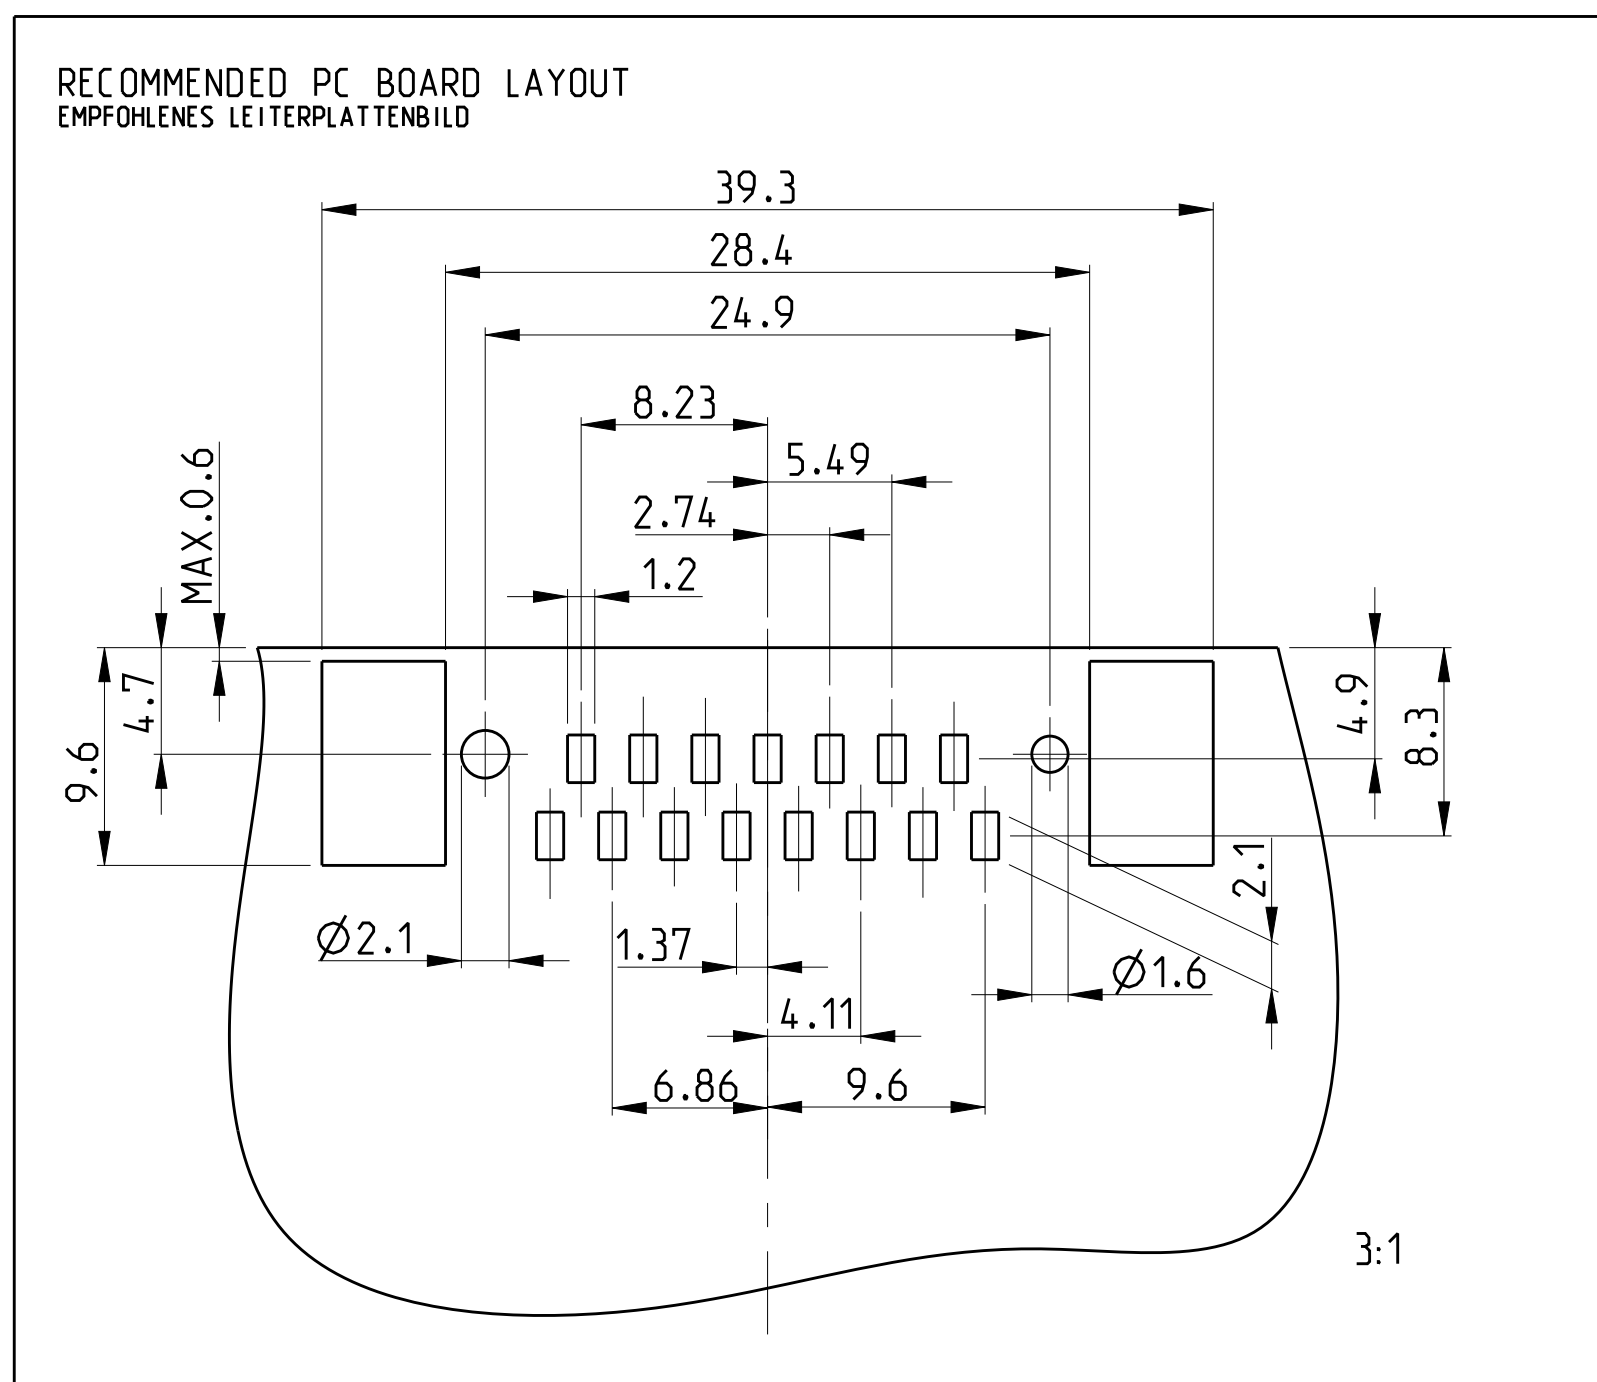

6	2	THREAD STUD GEW INDEBOLZEN	NICKEL NICKEL	STEEL STAHL
5	8	PIN CONTACT, SMD, LONG STIFTKONTAKT, SMD, LANG		CuMg
4	7	PIN CONTACT, SMD, SHORT STIFTKONTAKT, SMD, KURZ		CuMg
3	2	BRACKET, SMD, LEFT/RIGHT WINKELSTUECK, SMD, LINKS/RECHTS		CAST METAL DRUCKGUSS
2	1	PIN HOUSING STIFTGEHAEUSE	BLACK SCHWARZ	PCT-GF
1	1	SHELL SCHIRMBLECH	SEE TABLE SIEHE TABELLE	STEEL STAHL
POS.	QTY.	DESCRIPTION BENENNUNG	SURFACE OBERFLAECHE	MATERIAL
			COLOUR/FARBE	

[illegible]

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

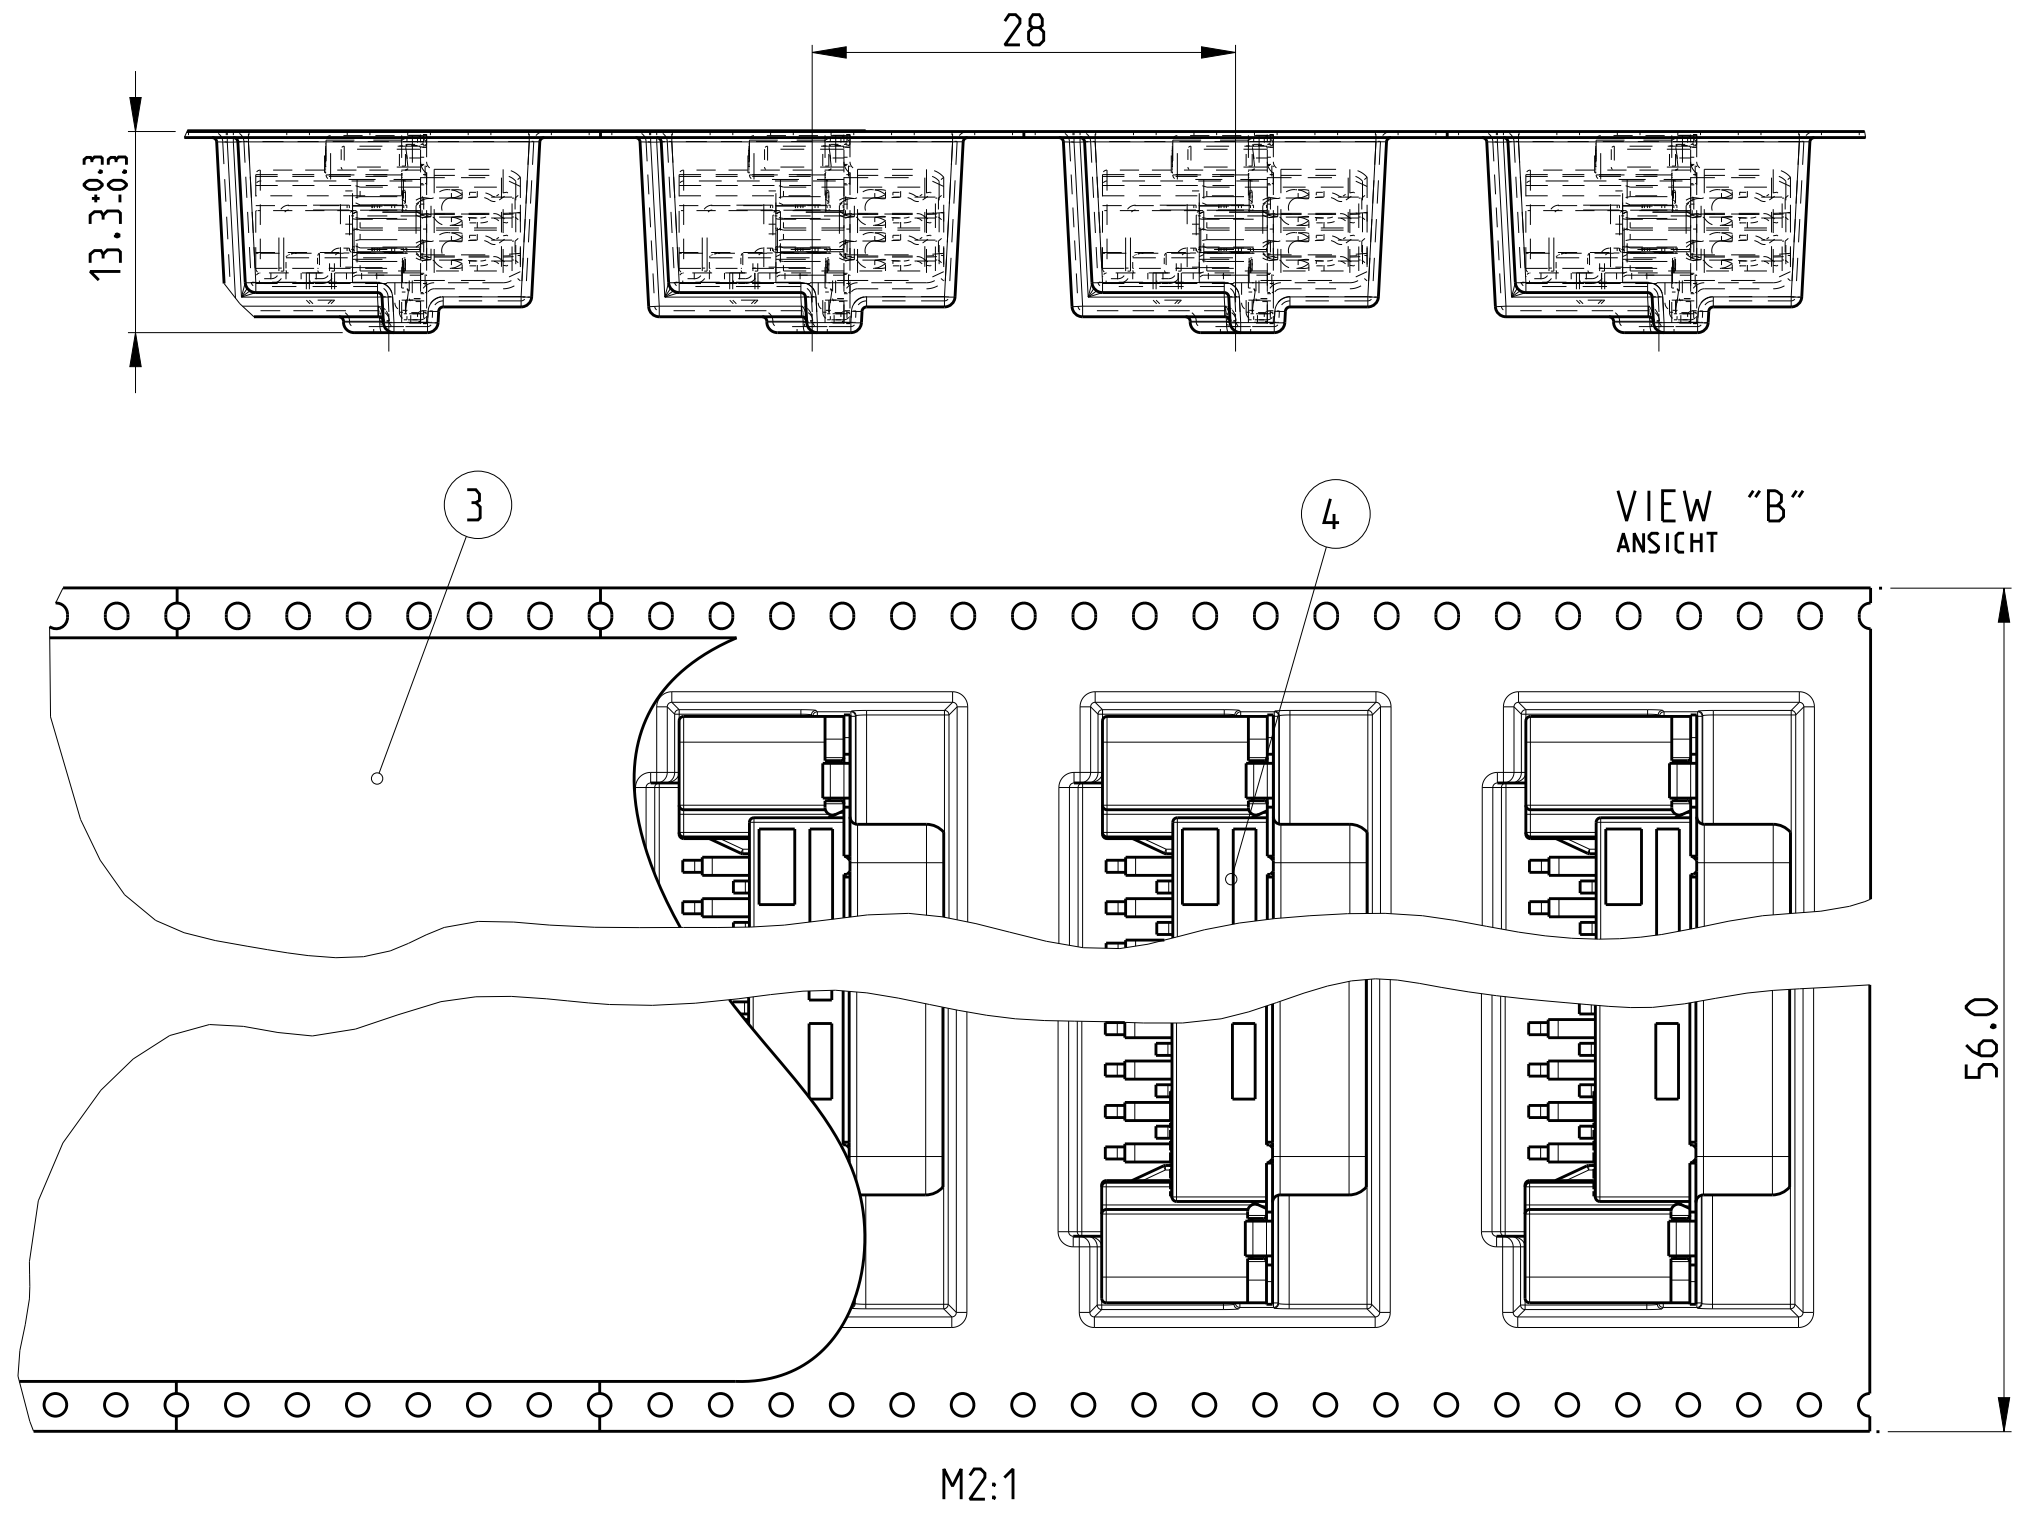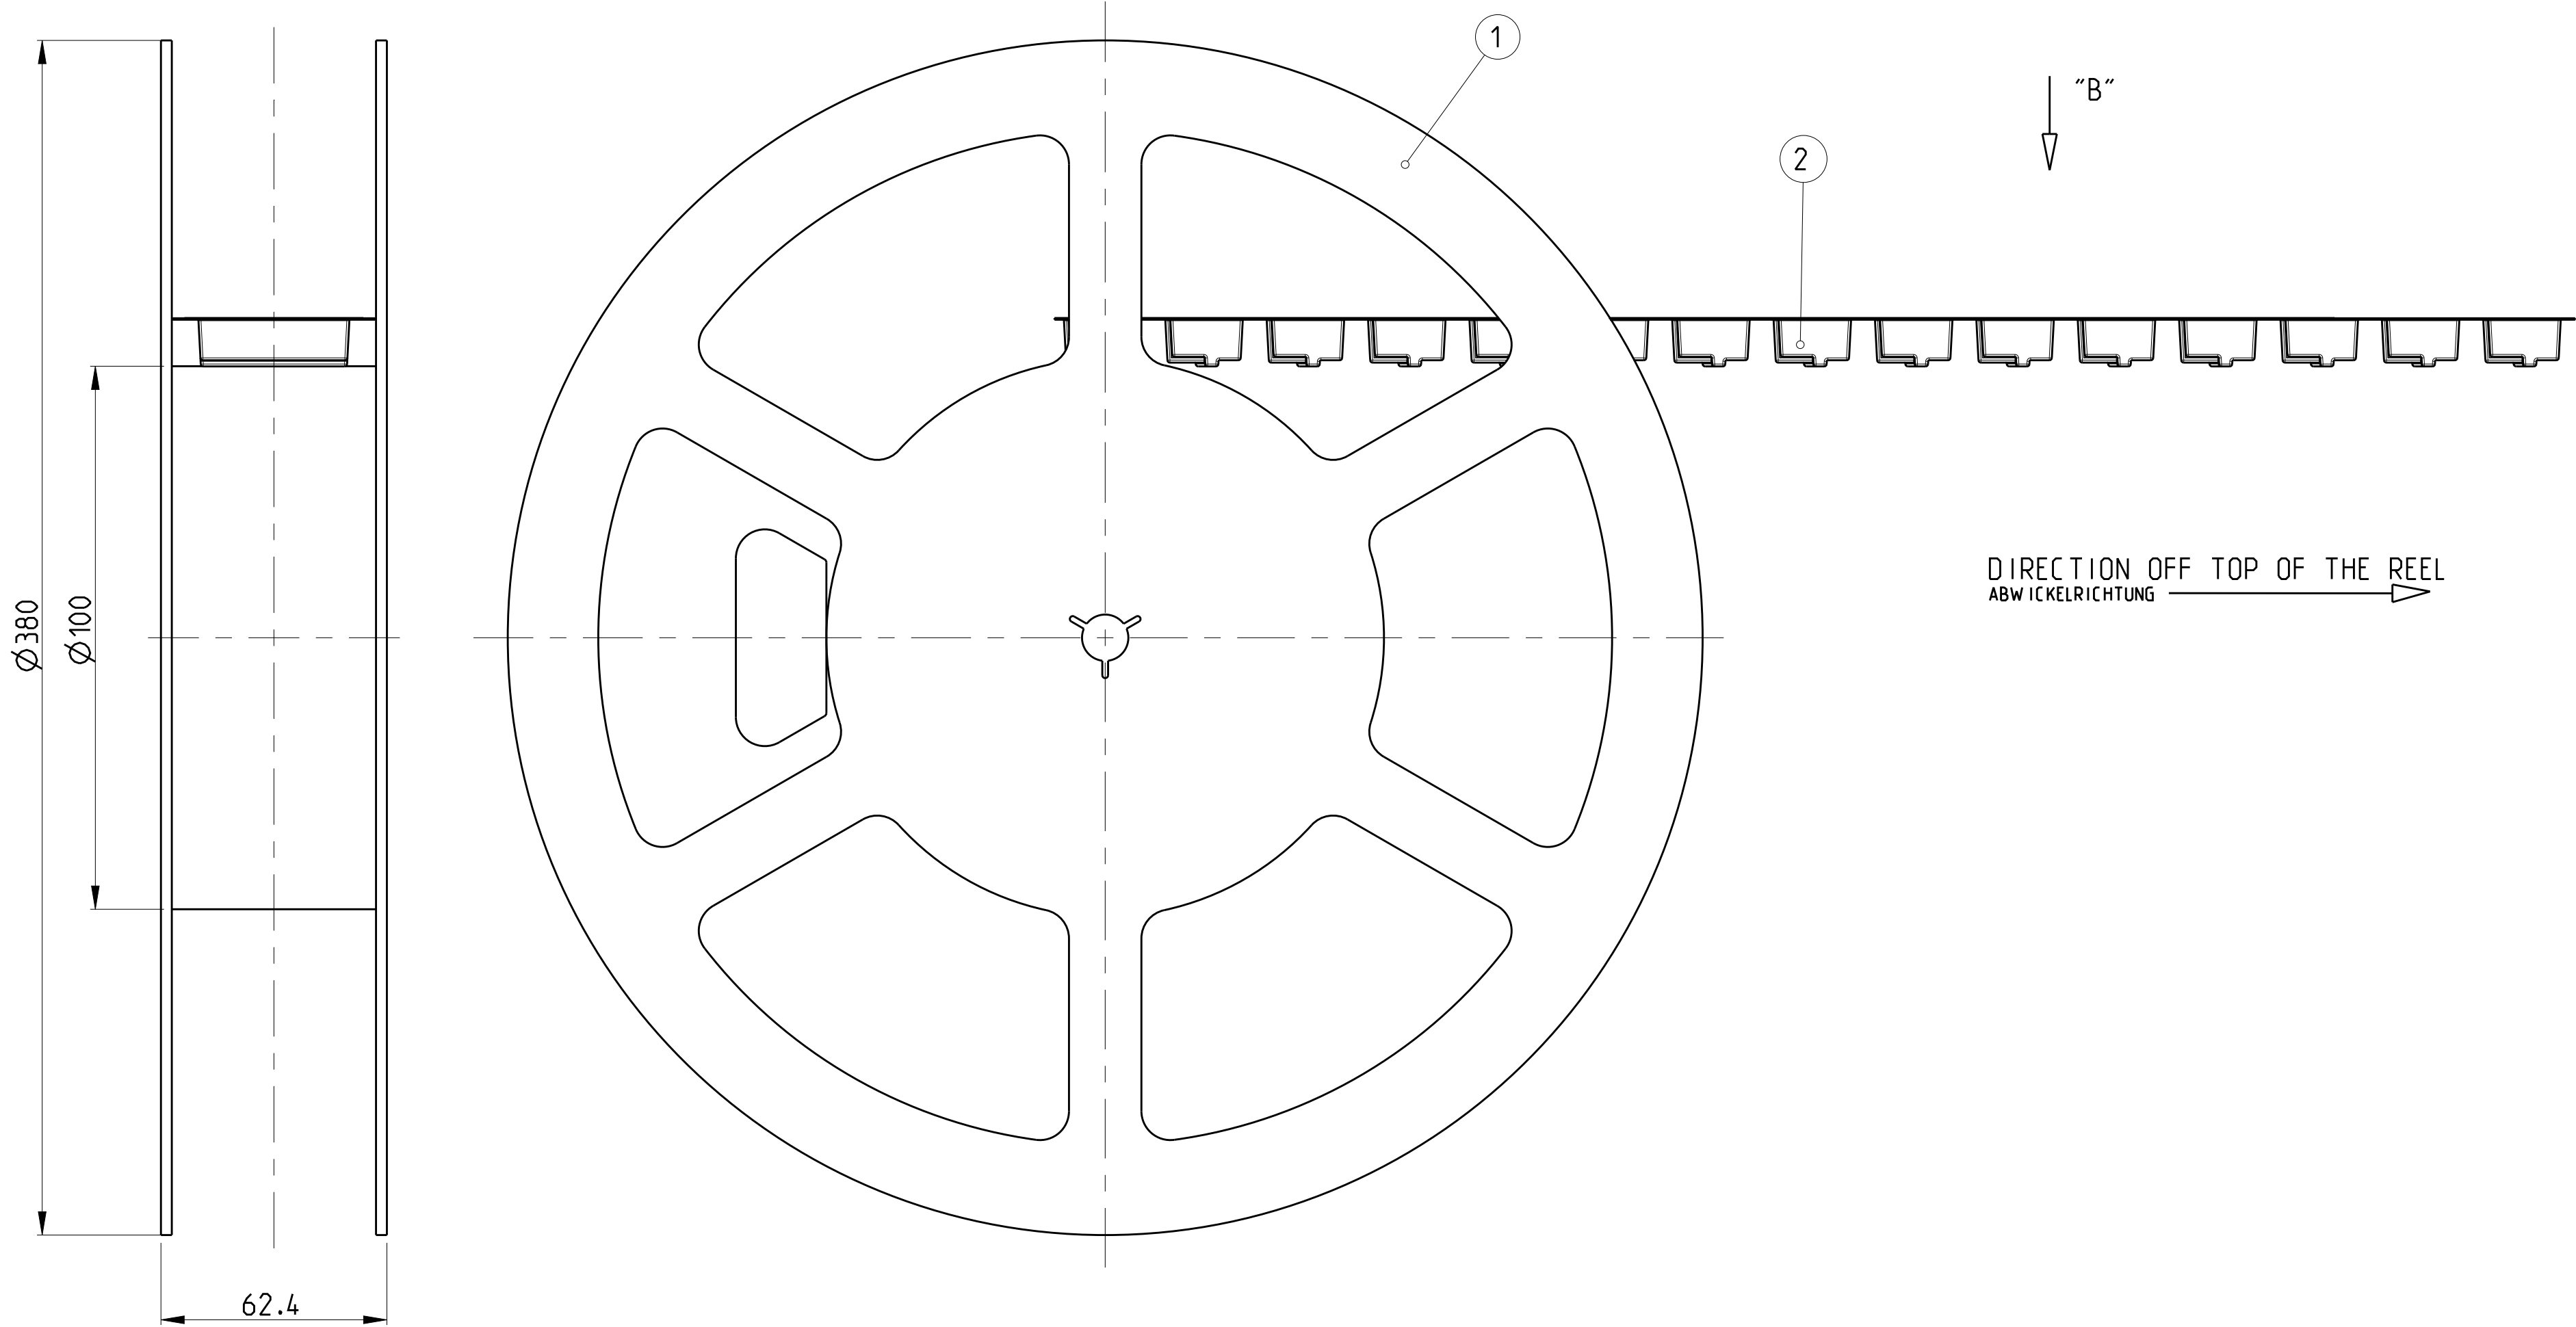

REMARKS:

- COVER TAPE WITH BLISTER BELT WELDED OR PASTED
 - BLISTER BELT, COVER AND TAPE ACC. TO DIN/IEC 286 PART 3
 - FIRST AND LAST RUNNING OF THE CARRIER TAPE ACC. TO DIN/IEC 286 PART 3
 - 7.0m BLISTERBELT AND 7.1m COVER TAPE, 225 LOOSE PIECE PARTS
- ⚠ OBSOLETE

BEMERKUNGEN:

- ABDECKBAND MIT BLISTERGURT VERSCHWEISST ODER VERKLEBT
 - BLISTERGURT, ABDECKBAND UND REEL NACH DIN/IEC 286 TEIL 3
 - VOR- UND NACHLAUF AM BLISTERGURT NACH DIN/IEC 286 TEIL 3
 - 7.0m BLISTERGURT UND 7.1m ABDECKBAND, 225 EINZELTEILE
- ⚠ UBERHOLT

		5	4-1740197-5	5	3-1740197-5	5	2-1740197-5	5	1-1740197-5	5	0-1740197-5			
		5	4-1740197-2	5	3-1740197-2	5	2-1740197-2	5	1-1740197-2	5	0-1740197-2			
1740197	4	225	-	-	-	-	SUB-D PIN HEADER, 15 POS., STUD M3 SUB-D STIFTSTECKER, 15 POL., BOLZEN M3					-	-	
	4	-	225	-	-	-	SUB-D PIN HEADER, 15 POS., STUD UNC4-40 SUB-D STIFTSTECKER, 15 POL., BOLZEN UNC4-40					-	-	
	4	-	-	225	-	-	SUB-D PIN HEADER, 15 POS., M3 SUB-D STIFTSTECKER, 15 POL., M3					-	-	
	4	-	-	-	225	-	SUB-D PIN HEADER, 15 POS., UNC4-40 SUB-D STIFTSTECKER, 15 POL., UNC4-40					-	-	
	4	-	-	-	-	225	SUB-D PIN HEADER, 15 POS. SUB-D STIFTSTECKER, 15 POL.					-	-	
	3	7.1m	7.1m	7.1m	7.1m	7.1m	COVER BELT FOR BLISTER BELT ABDECKBAND FUER BLISTERGURT					TRANSPARENT	PET	
	2	7m	7m	7m	7m	7m	BLISTER BELT BLISTERGURT					GREY/BLACK GRAU/SCHWARZ	PS	
	1	1	1	1	1	1	REEL SPULE					GREY GRAU	PS	
TE ORDER NO. BESTELL-NR.	POS.						DESCRIPTION BENENNUNG					SURFACE OBERFLAECHE COLOUR/FARBE	MATERIAL	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: L.SCHLUETER 03NOV2004	NAME	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK: M.SCHAARSCHMIDT 01DEC2004	HDP20 PIN HEADER, SMT, 15 POS. HDP20 STIFTLISTE, SMT, 15 POL. EUROSTYLE	
		APVD: G.FELDMEIER 01DEC2004		
	MATERIAL SEE TABLE S.TABELLE	PRODUCT SPEC	SIZE	
		108-94000	CAGE CODE	
APPLICATION SPEC		DRAWING NO.		
WEIGHT		RESTRICTED TO		
FINISH	SEE TABLE S.TABELLE	A 1	-	-
CUSTOMER DRAWING		SCALE	1:1	SHEET 2 OF 2
		REV F		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1740197-2](#)