

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
	C			REVISED PER ECO-11-020527	120CT11	KH MS

MATERIAL:

HOUSING: THERMOPLASTIC, UL94V-0, BLACK.

TERMINAL: M3 THREAD, BRIGHT TIN PLATED,
COPPER ALLOY.SCREWS: M3 THREAD, ZINC PLATED STEEL,
EXCEPT WHERE NOTED OTHERWISE.

ELECTRICAL:

RATED CURRENT: 10A.


OPERATING VOLTAGE: 300V.

WIRE RANGE: 16-30 AWG.

MECHANICAL:

PITCH (TERMINAL SPACING): .250"

OPERATING TEMP.: 120°C MAX.

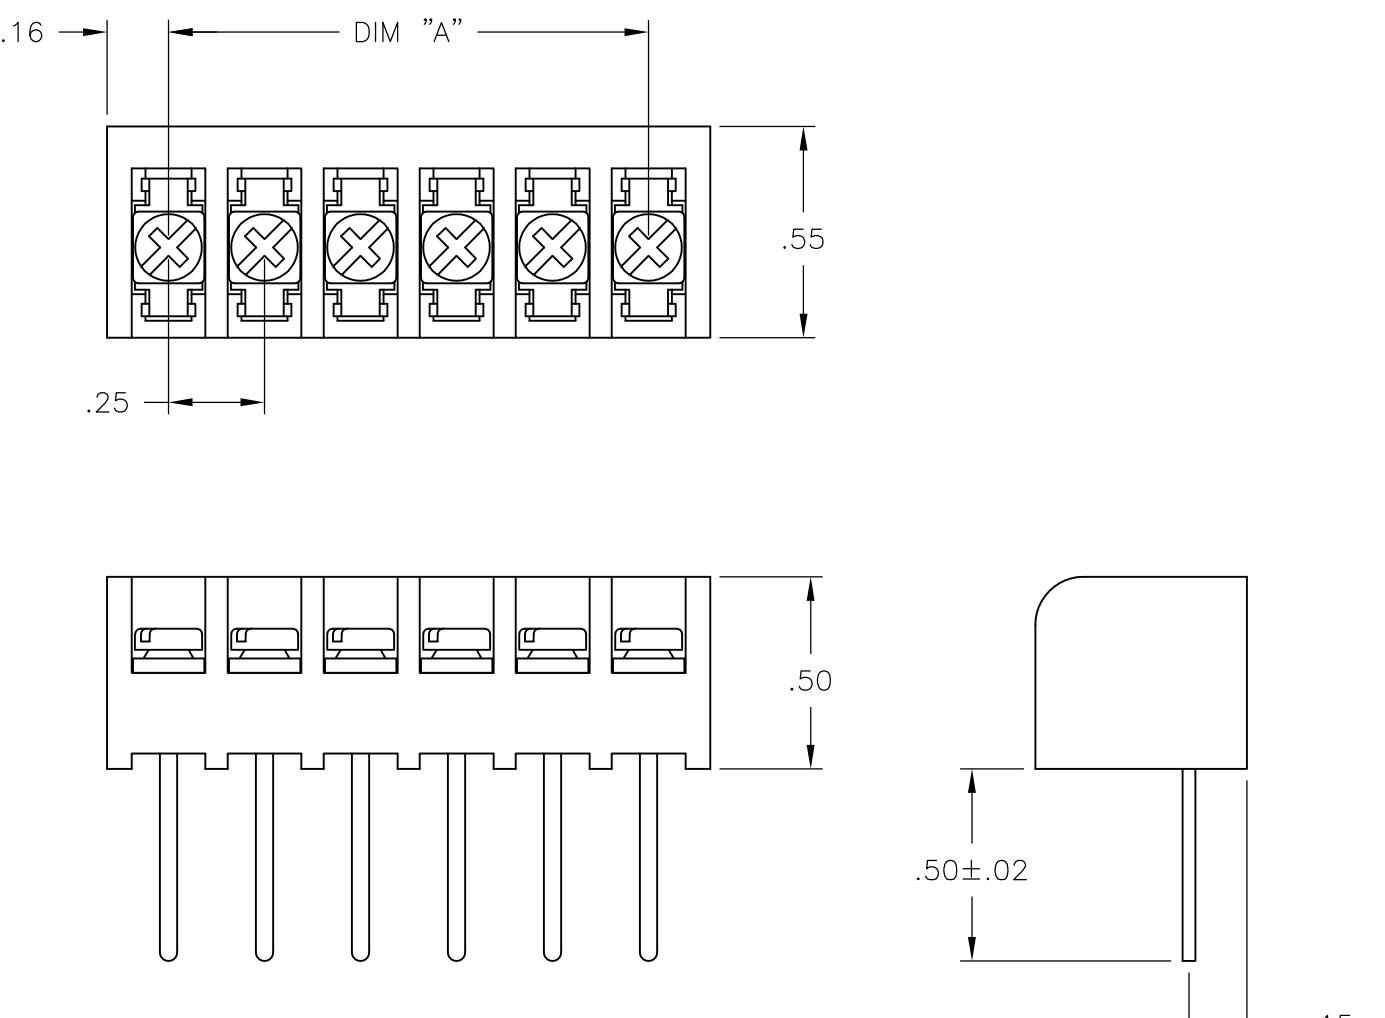

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S SCHLEGEL 4/10/03	CHK S YODER 4/10/03	TE Connectivity		
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	3WWV-XX-008 ASSEMBLY	
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± - ± - ± .02 ± .010 ± - ± 1°	PRODUCT SPEC		
MATERIAL	FINISH	APPLICATION SPEC		
-	-	WEIGHT	A300779 C-6-1546119-5	
CUSTOMER DRAWING			SCALE	NTS
			1 OF 1	REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3WWV-08-008](#)