


DESIGNED FOR USE WITH RG188/U FLEXIBLE CABLE CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.0234
DIELECTRIC	.066
COLLAR	.0656
CLAMP NUT	.1124

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION		DATE	APVD
		B		REV PER ECO 07-004710	DW KW

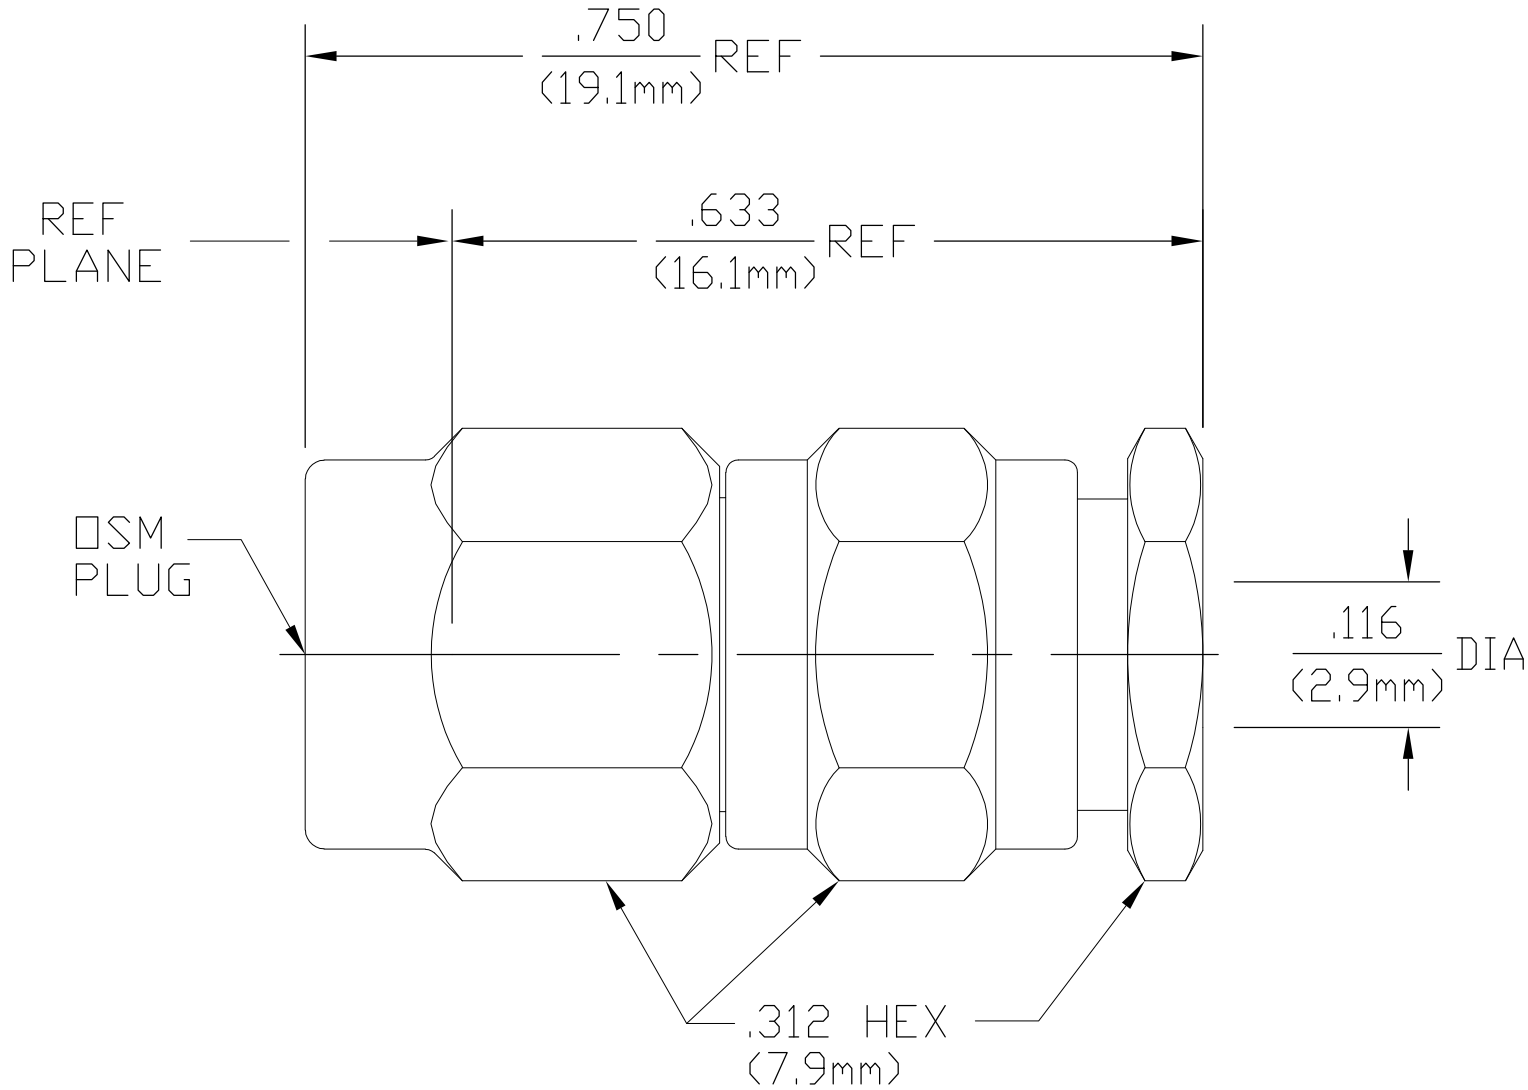

1050720-1

PART NUMBER

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310.1	TEMPERATURE RATING -65°C TO +165°C
Frequency Range (GHz) DC to 18	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 250	Torque 7-10 In-Lbs	Shock MIL-STD-202, Method 213, Condition I
VSWR 1.15 + .02f(GHz)	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B, EXCEPT HIGH TEMP 85°C
Insertion Loss (dB MAX) .06 √f GHz	Insertion (MAX Lbs) N/A	Moisture Resistance MIL-STD-202, Method 106 Step 7b (Vibration)
RF Leakage (dB MIN) -[60-f(GHz)]	Withdrawal (MIN Oz) N/A	Shall Be Omitted
Corona, 70,000 Ft (VRMS MIN) 190	Force to Engage and Disengage (In-Lbs MAX) 2	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750	Center Contact Captivation	
Contact Resistance (Milliohms MAX)	Axial (Lbs) 6 Min	
Center Contact 3.0	Radial (In-Oz) N/A	
Outer Contact 2.0	Cable Retention	
Cable to Housing 0.5	Axial Force (Lbs) 20 MIN	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500	Torque (In-Oz) N/A	
I.R.(Megohms MIN) 5,000	Weight (Grams) TBD	

HOUSING COUPLING NUT CLAMP NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H OR BRASS PER ASTM-B-16	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
COLLAR	BRASS PER QQ-B-626 COMP. 360, HALF HARD	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BWC	6/2/67	tyco <i>Electronics</i> Tyco Electronics Corporation Harrisburg, PA 17105-3608						
DIMENSIONS: INCHES		CHK —	—							
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD DJ	8/10/67	NAME OSM STRAIGHT CABLE PLUG CLAMP ATTACHMENT —					
	0 PLC ± —		PRODUCT SPEC —							
	1 PLC ± —		APPLICATION SPEC —							
	2 PLC ± —		—							
	3 PLC ± .005		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO			
	4 PLC ± —		A2		00779	C-1050720	—			
MATERIAL —		FINISH —	WEIGHT —		CUSTOMER DRAWING			SCALE 5:1	SHEET 1 of 1	REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2001-7188-00](#)