

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AD	00		A1	REVISED PER ECO-11-004917	11MAR11	RK HMR

SPECIFICATIONS:

MATERIALS:
MOVEABLE CONTACT: COPPER ALLOY, GOLD PLATE
OVER SILVER CLAD.
FIXED CONTACT: COPPER ALLOY, GOLD PLATE
OVER SILVER CLAD.

ELECTRICAL:
CONTACT RATING: 0.4VA @ 20VDC OR PEAK AC.
5 AMPS @ 250VAC OR 24VDC (RESISTANCE).
INITIAL CONTACT RESISTANCE: 20 MILLIOHMS MAX
INSULATION RESISTANCE: 100 MEGOHMS MINIMUM
DIELECTRIC STRENGTH: 1500 VOLTS RMS @ SEA LEVEL
LIFE EXPECTANCY: 100,000 OPERATIONS AT RATED CURRENT

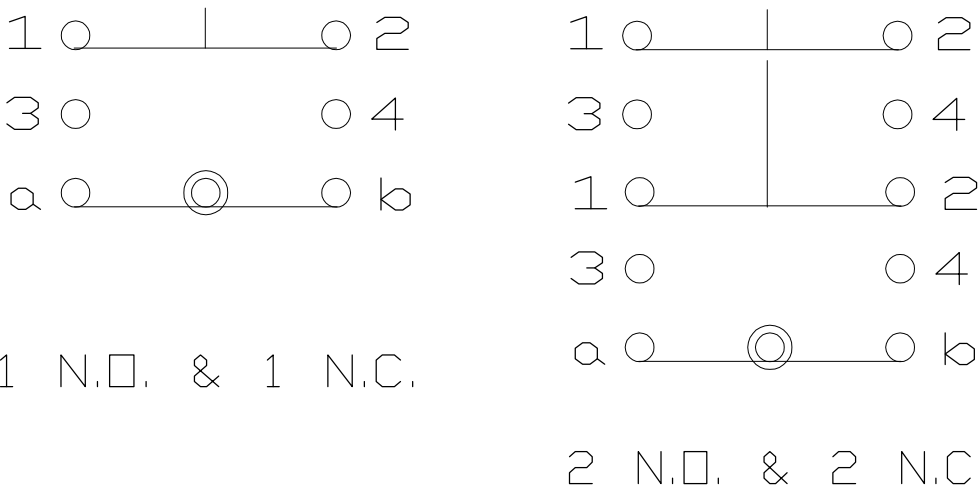
ENVIRONMENTAL:
OPERATING TEMPERATURE: -4 F TO 122 F
(-20 C TO 50 C)
STORAGE TEMPERATURE: -4 F TO 122 F
(-20 C TO 50 C)

- NOTES:
- INTERPRET DRAWING PER ASME Y14.5M-1994
 - DILTIGHT MODELS MEET NEMA 1, 12, 13 REQUIREMENTS
 - UL RECOGNIZED E-51302
 - PANEL THICKNESS: NON-DILTIGHT = 0.230 MAX
DILTIGHT = 0.210 MAX

- 5 THE PLATINGS CONTAINED IN THIS PART SHALL CONTAIN NO LEAD.
- 6 PRELIMINARY PART, NOT RELEASED FOR PRODUCTION.

* DENOTES DILTIGHT VERSION DIMENSIONS



** ORDER BUTTON AND LAMP SEPARATELY: SEE
REF 80810 & 80811



CONTACT DIAGRAM
(BUTTON NOT DEPRESSED)

WAS DWG 80809

1571543-3	 	164EL522		2 N.O. & N.C.	PUSH ON/PUSH OFF
1571543-2	 	164EL511		1 N.O. & N.C.	PUSH ON/PUSH OFF
1571543-1	 	164EL11		1 N.O. & N.C.	MOMENTARY
			165EL533	3 N.O. & N.C.	PUSH ON/PUSH OFF
4-1437569-5			165EL522	2 N.O. & N.C.	PUSH ON/PUSH OFF
4-1437569-4			165EL511	1 N.O. & N.C.	PUSH ON/PUSH OFF
			165EL33	3 N.O. & N.C.	MOMENTARY
4-1437569-3			165EL22	2 N.O. & N.C.	MOMENTARY
4-1437569-2			165EL11	1 N.O. & N.C.	MOMENTARY
1437569-7		164EL533		3 N.O. & N.C.	PUSH ON/PUSH OFF
1437569-6		164EL522		2 N.O. & N.C.	PUSH ON/PUSH OFF
1437569-5		164EL511		1 N.O. & N.C.	PUSH ON/PUSH OFF
1437569-4		164EL5		-	PUSH ON/PUSH OFF
		164EL33		3 N.O. & N.C.	MOMENTARY
1437569-3		164EL22		2 N.O. & N.C.	MOMENTARY
1437569-2		164EL11		1 N.O. & N.C.	MOMENTARY
1437569-1		164EL		-	MOMENTARY
PART No.	COMMENTS	MODEL NON DILTIGHT	MODEL DILTIGHT	CONTACTS	ACTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN CMM 11-4-87		 TE Connectivity			
		CHK JB 12-8-87					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD SMM 12-9-87		NAME	
		0 PLC ± -		PRODUCT SPEC		ILUMINATED PUSHBUTTON (164EL SERIES)	
		1 PLC ± -		—			
		2 PLC ± -		—			
		3 PLC ± .010		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		4 PLC ± -		—			
		ANGLES ± -		—			
MATERIAL		FINISH		WEIGHT —		A2 00779 C=1437569-1	
—		—		CUSTOMER DRAWING		SCALE NTS	
						SHEET 1 of 1	
						REV A1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[164EL522](#)