
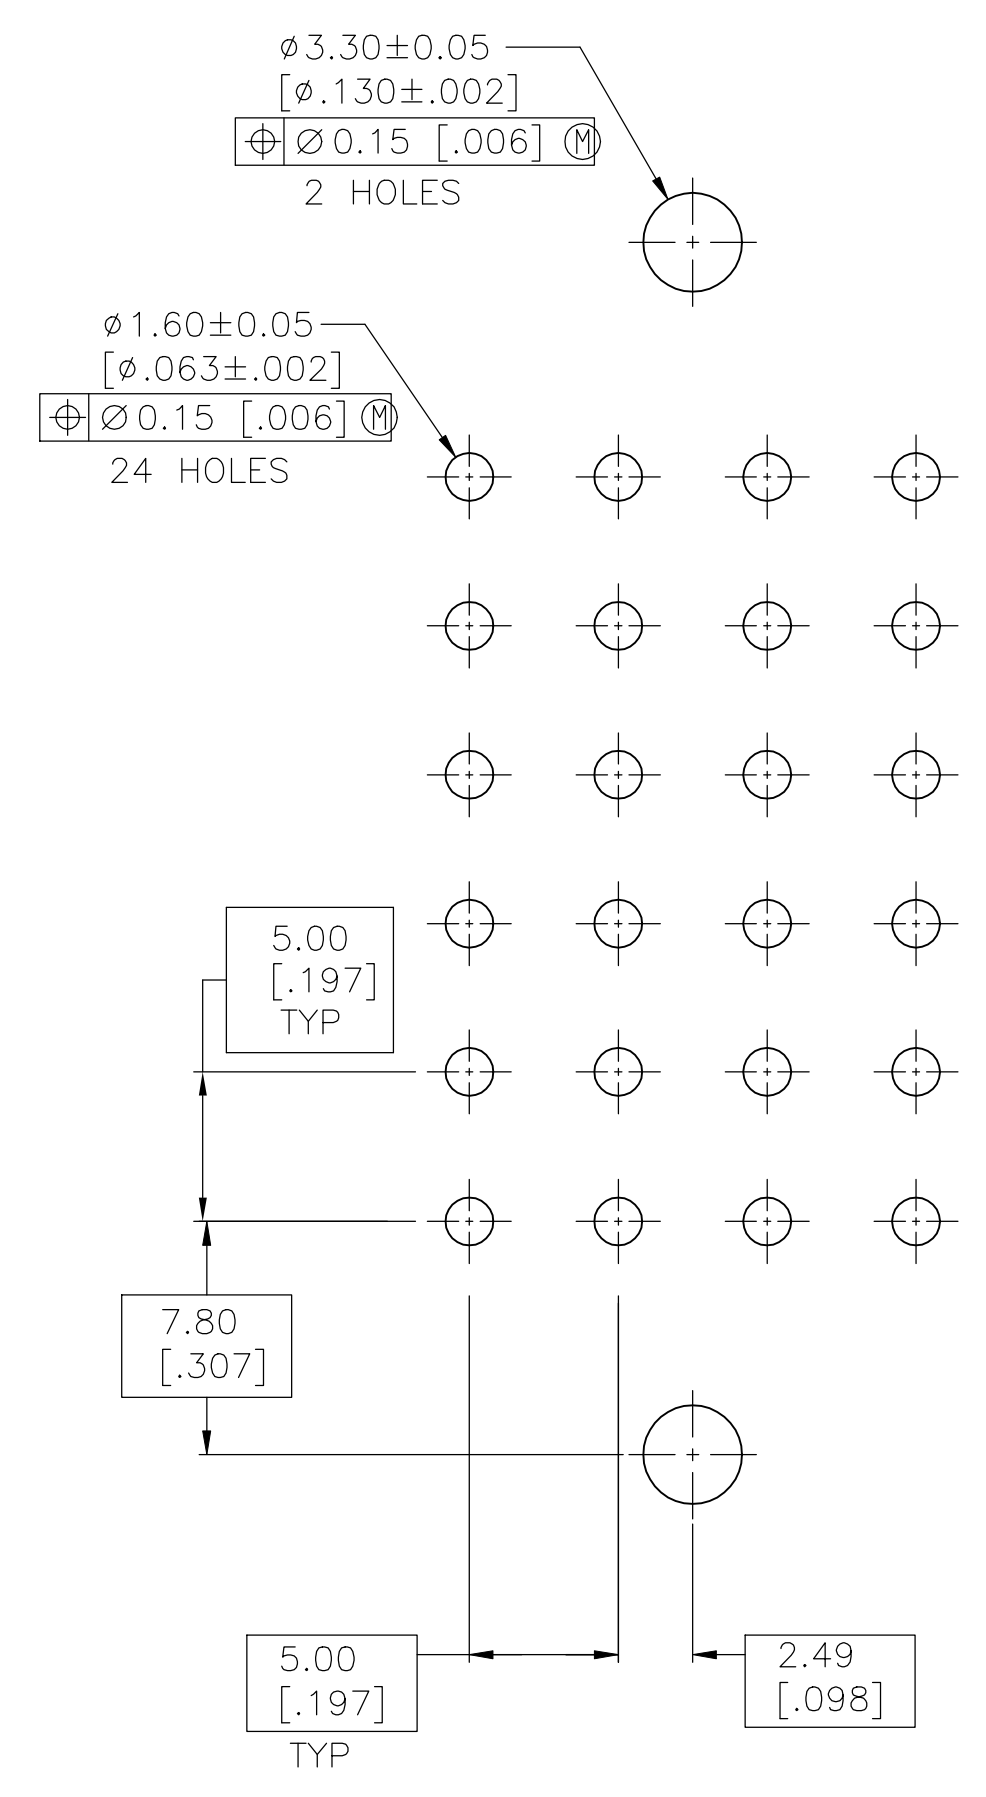
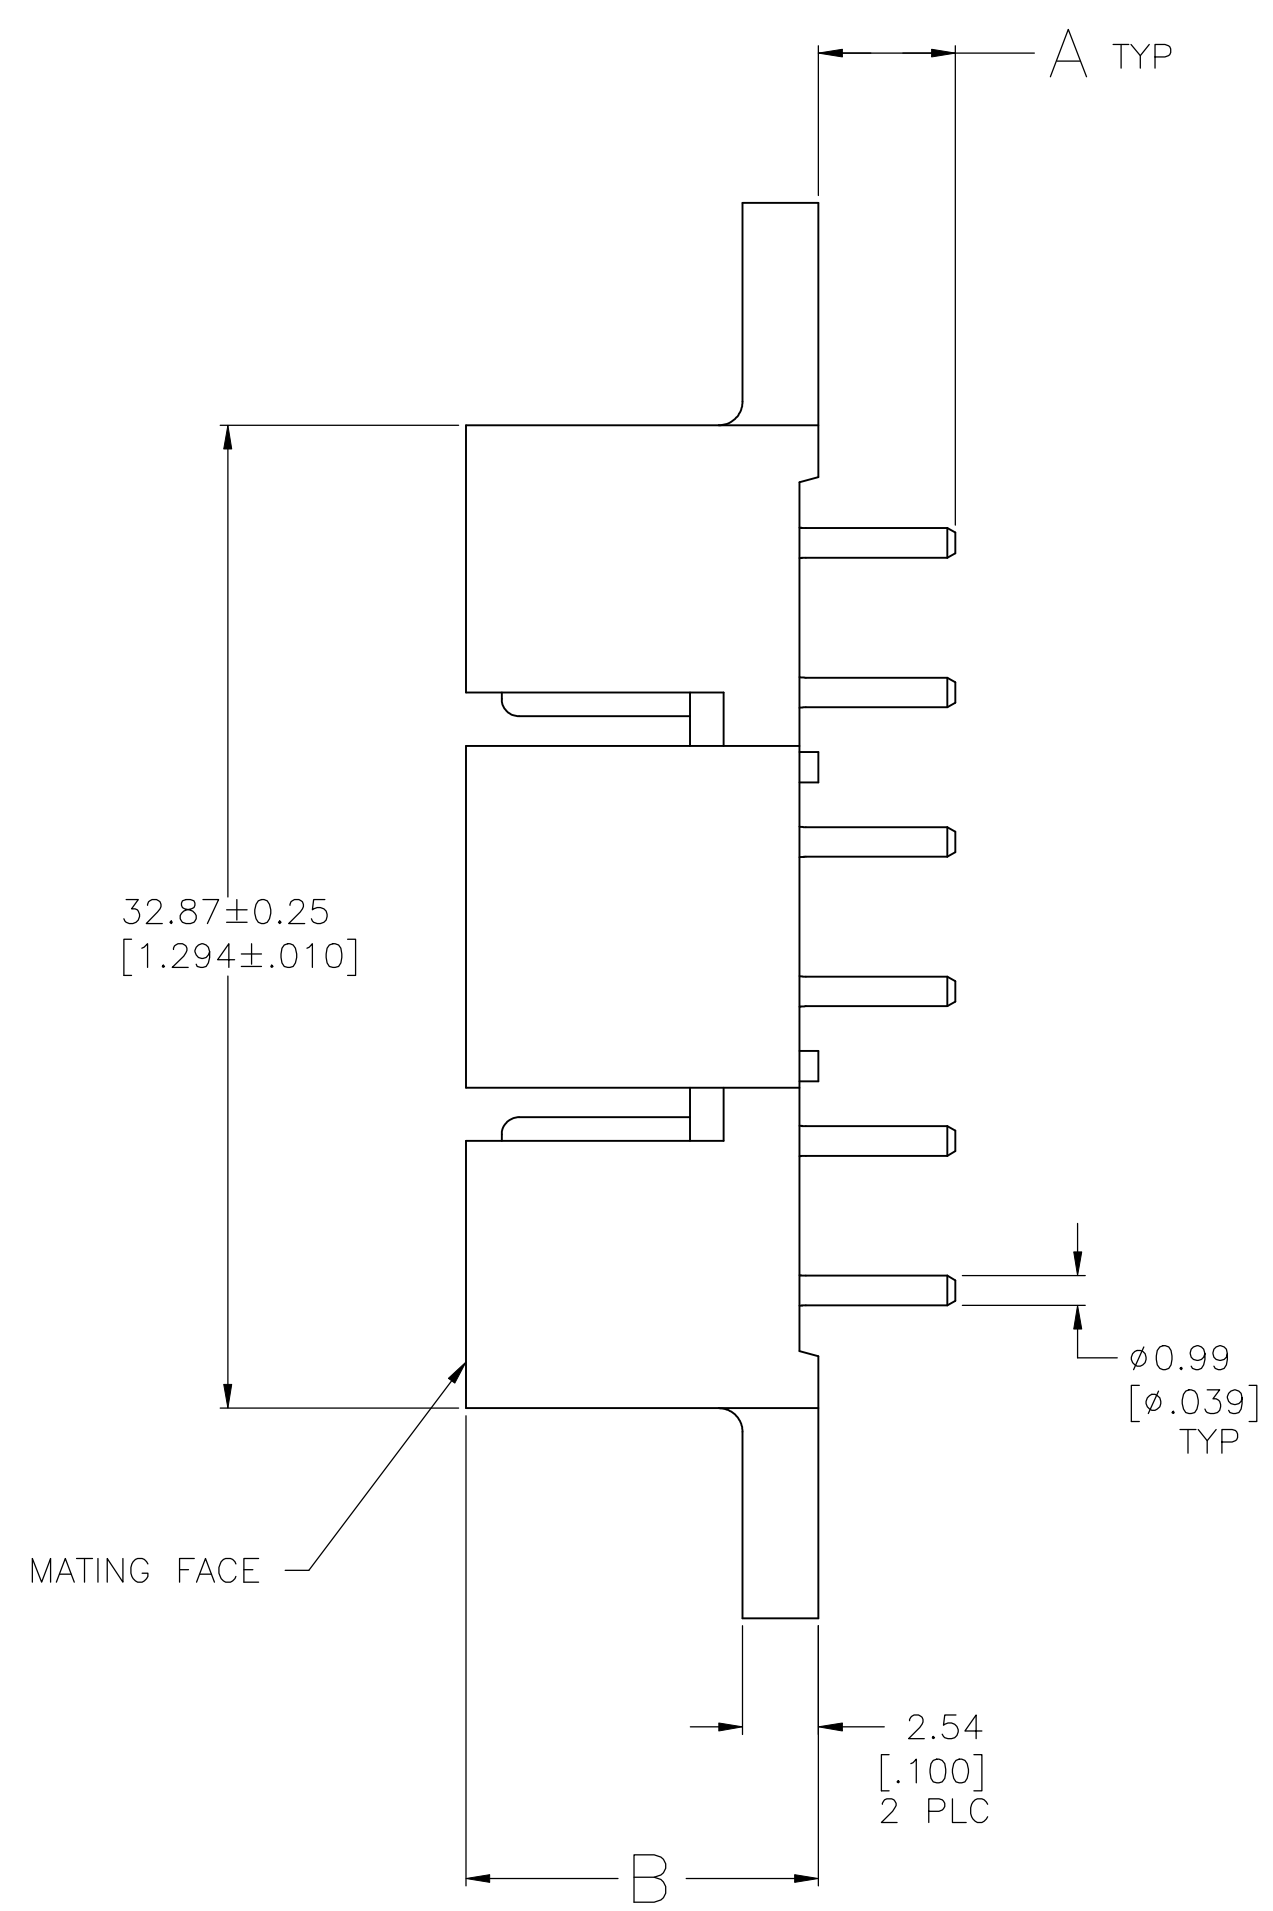
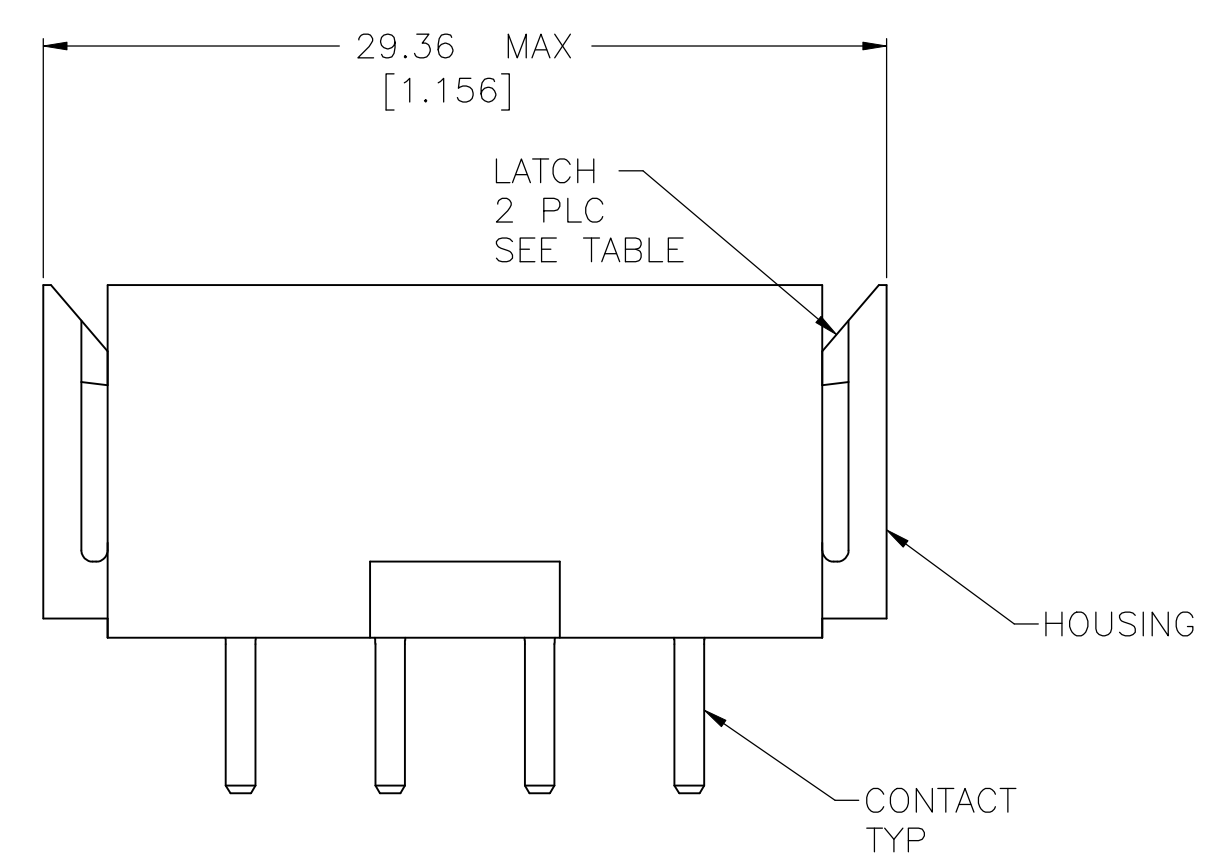


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
AA		REVISED PER ECO-16-011265	12AUG2016	NK	MZ
AB		REV PER ECO-18-000441	23JAN2018	RS	MZ

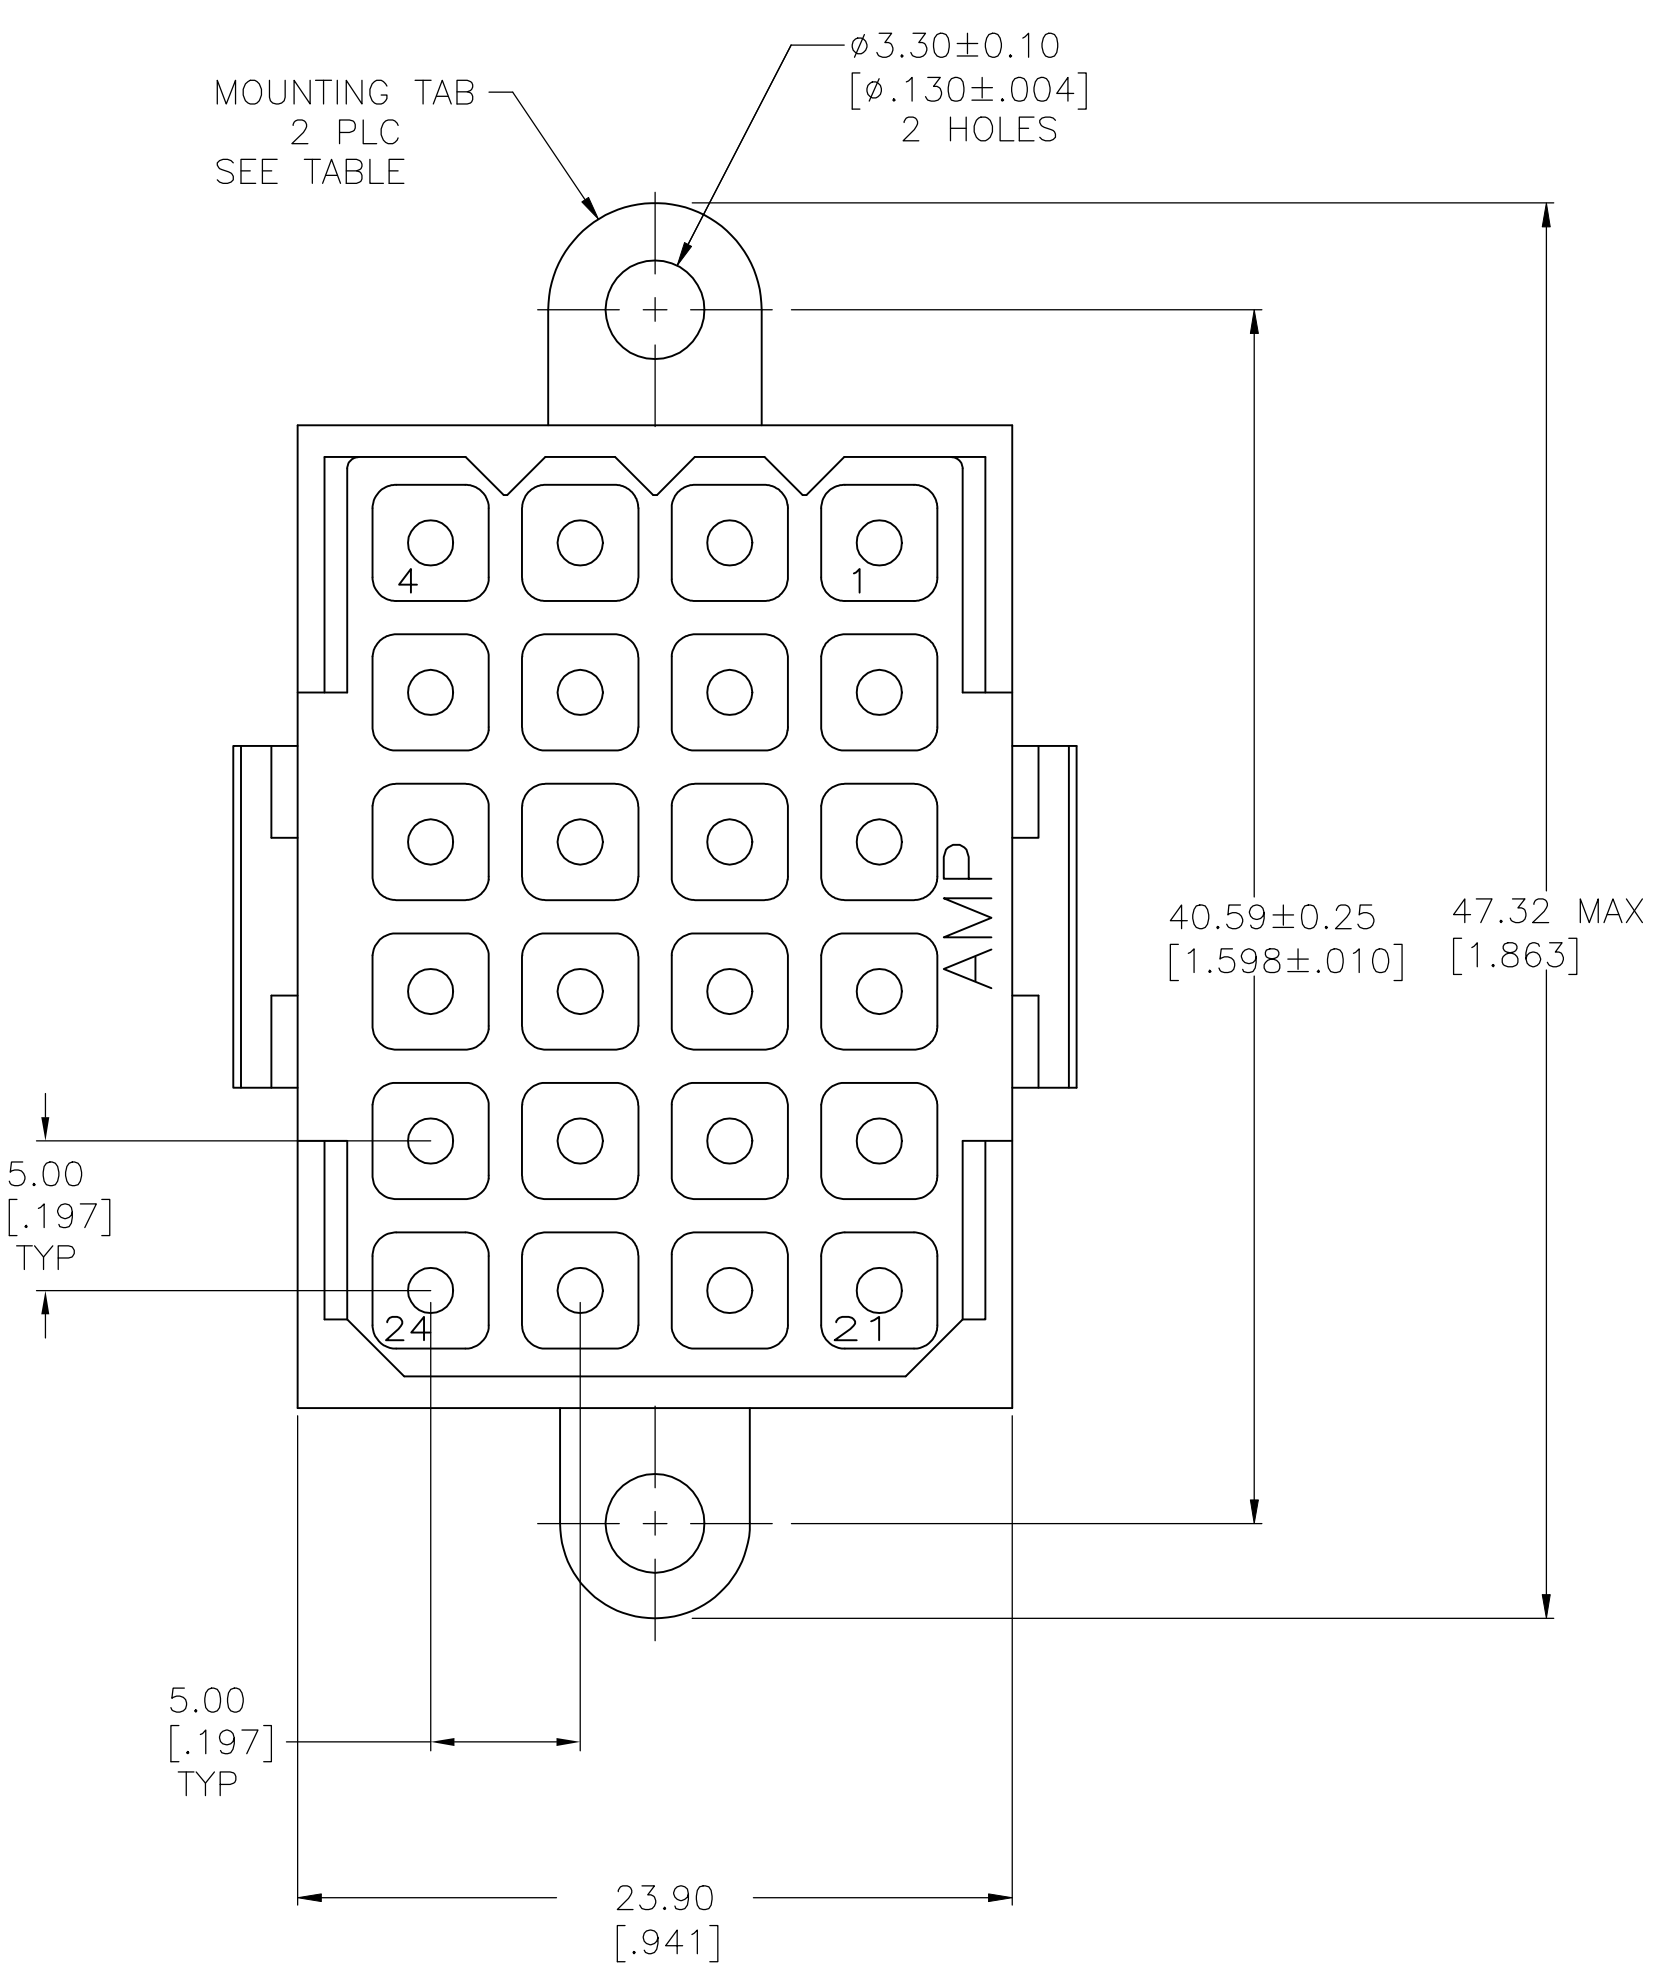

RECOMMENDED PC BOARD LAYOUT

- 1 NYLON, UL 94V-O RATED, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81um [.000150] MIN TIN-LEAD OVER 2.54um [.000100] MIN COPPER OR 1.27um [.000050] MIN NICKEL.
- 4 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 5 0.38um [.000015] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 6 .000150 MIN TIN OVER .000100 MIN COPPER OR .000050 MIN NICKEL.
- 7 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

11.79[.464]	4.60±0.64[.181±.025]	YES	△	NO	1-206763-4
11.79[.464]	4.60±0.64[.181±.025]	YES	△	YES	1-206763-3
11.79[.464]	4.60±0.64[.181±.025]	YES	△	NO	1-206763-2
11.79[.464]	4.60±0.64[.181±.025]	YES	△	YES	1-206763-1
OBSOLETE 11.79[.464]	4.60±0.64[.181±.025]	NO	△	YES	<del>206763-9</del>
OBSOLETE 13.31[.524]	4.60±0.64[.181±.025]	YES	△	NO	<del>206763-8</del>
OBSOLETE 11.79[.464]	4.60±0.64[.181±.025]	YES	△	NO	206763-4
OBSOLETE 11.79[.464]	4.60±0.64[.181±.025]	YES	△	YES	206763-3
OBSOLETE 11.79[.464]	4.60±0.64[.181±.025]	YES	△	NO	206763-2
OBSOLETE 11.79[.464]	4.60±0.64[.181±.025]	YES	△	YES	206763-1
B		A	LATCHES	CONTACT FINISH	MOUNTING TABS
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. SIPE 03/11/92	CHK R. STONE 3-17-92	APVD A. TRAVIS 3-17-92	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ±		1 PLC ±		2 PLC ± 0.13 [.005]	
3 PLC ±		4 PLC ±		ANGLES ±	
MATERIAL HOUSING: 1		FINISH: CONTACT: SEE TABLE		WEIGHT	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1	
REV AB		RESTRICTED TO		PIN HEADER ASSEMBLY, 24 POSITION, METRIMATE	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-206763-4](#)