

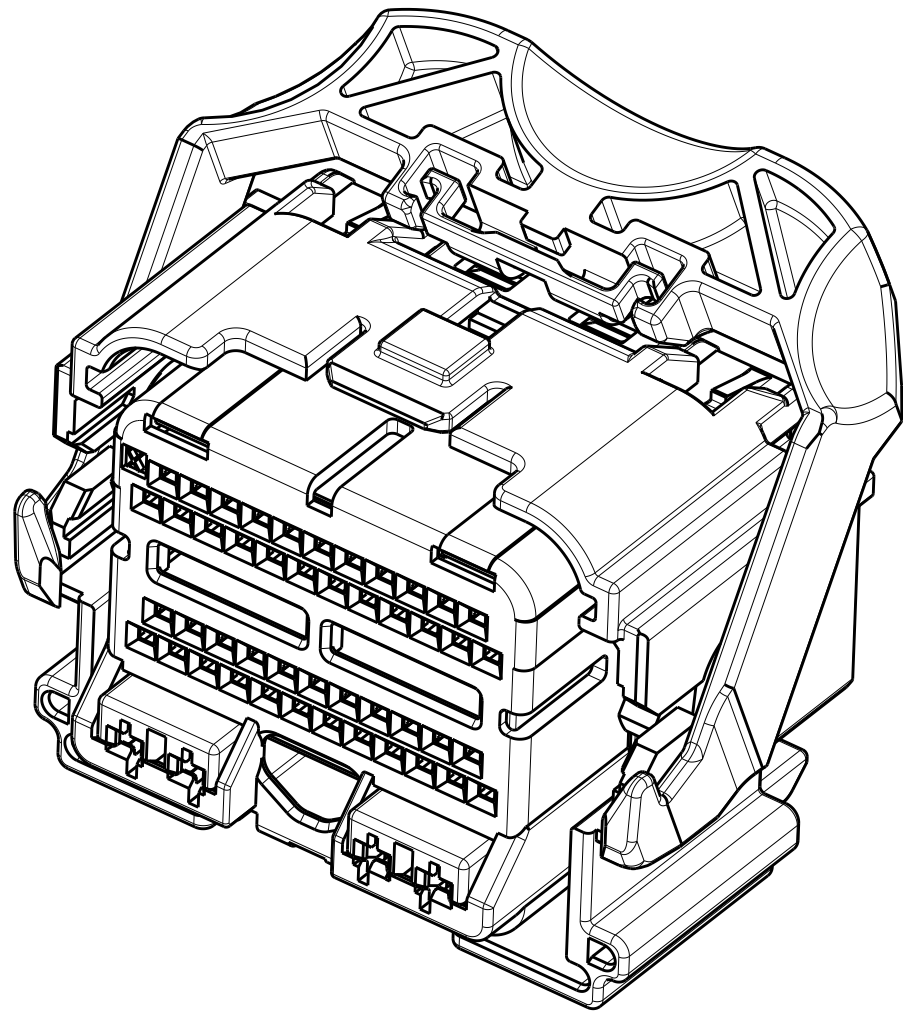


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A15		REVISED PER ECO-11-002569	25FEB2011	DLD	DCM
A16		REVISED PER ECO-14-011102	22JUL2014	DLD	DCM

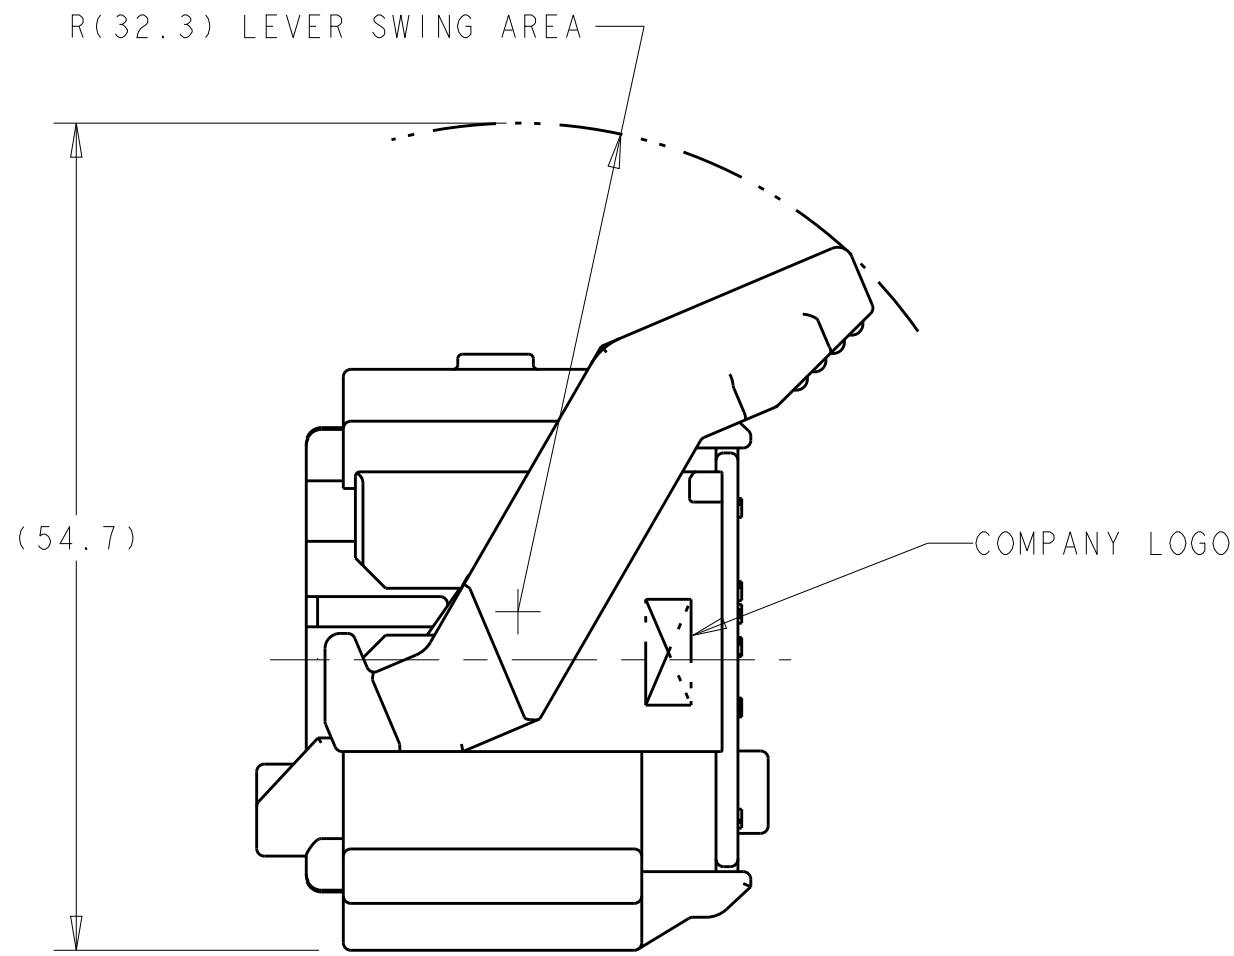


PART NUMBER:
1438691-1
SHOWN WITH SPACER
IN SEATED POSITION
SCALE 2:1


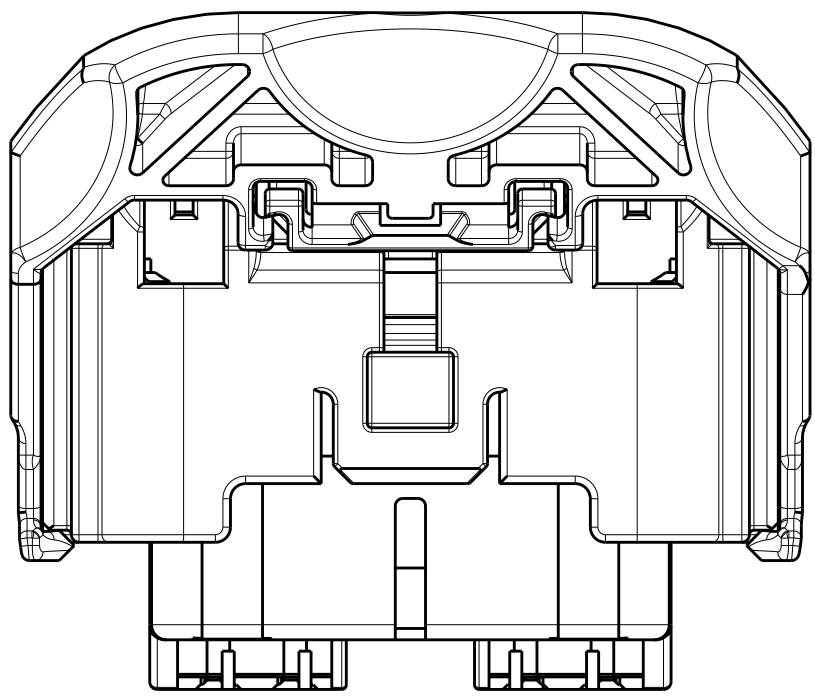


SHOWN WITH SPACER IN SEATED POSITION



- ⚠️ PRINT TE PART NUMBER AND TRACEABILITY (YY : 2 DIGIT YEAR, JJJ = JULIAN DATE, HH = 2 DIGIT MILITARY HOUR CODE) IN THE LOCATION AT ASSEMBLY.
- ⚠️ OPTIONAL WIRE SHIELD PART NUMBERS (SOLD SEPARATELY) 1438126, 1438180, 1488373, AND 1488572. CONTACT TE ENGINEERING FOR MINIMUM FEED THRU CONDITION.
3. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY) FOR TIN APPLICATIONS: 1393367 AND 1393366. FOR GOLD APPLICATIONS: 1393365 AND 1393364 FOR TERMINATION AND REELING OPTIONS SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
4. APPLICABLE MOLEX (1.5) POWER TERMINAL PART NUMBERS: 33012-0002 TIN 0.50-1.50mm²
5. CAM LEVER AND SPACER ARE SHIPPED IN THEIR PRE-ASSEMBLED POSITIONS.
6. REFERENCE TE INSTRUCTION SHEET 408-8893.

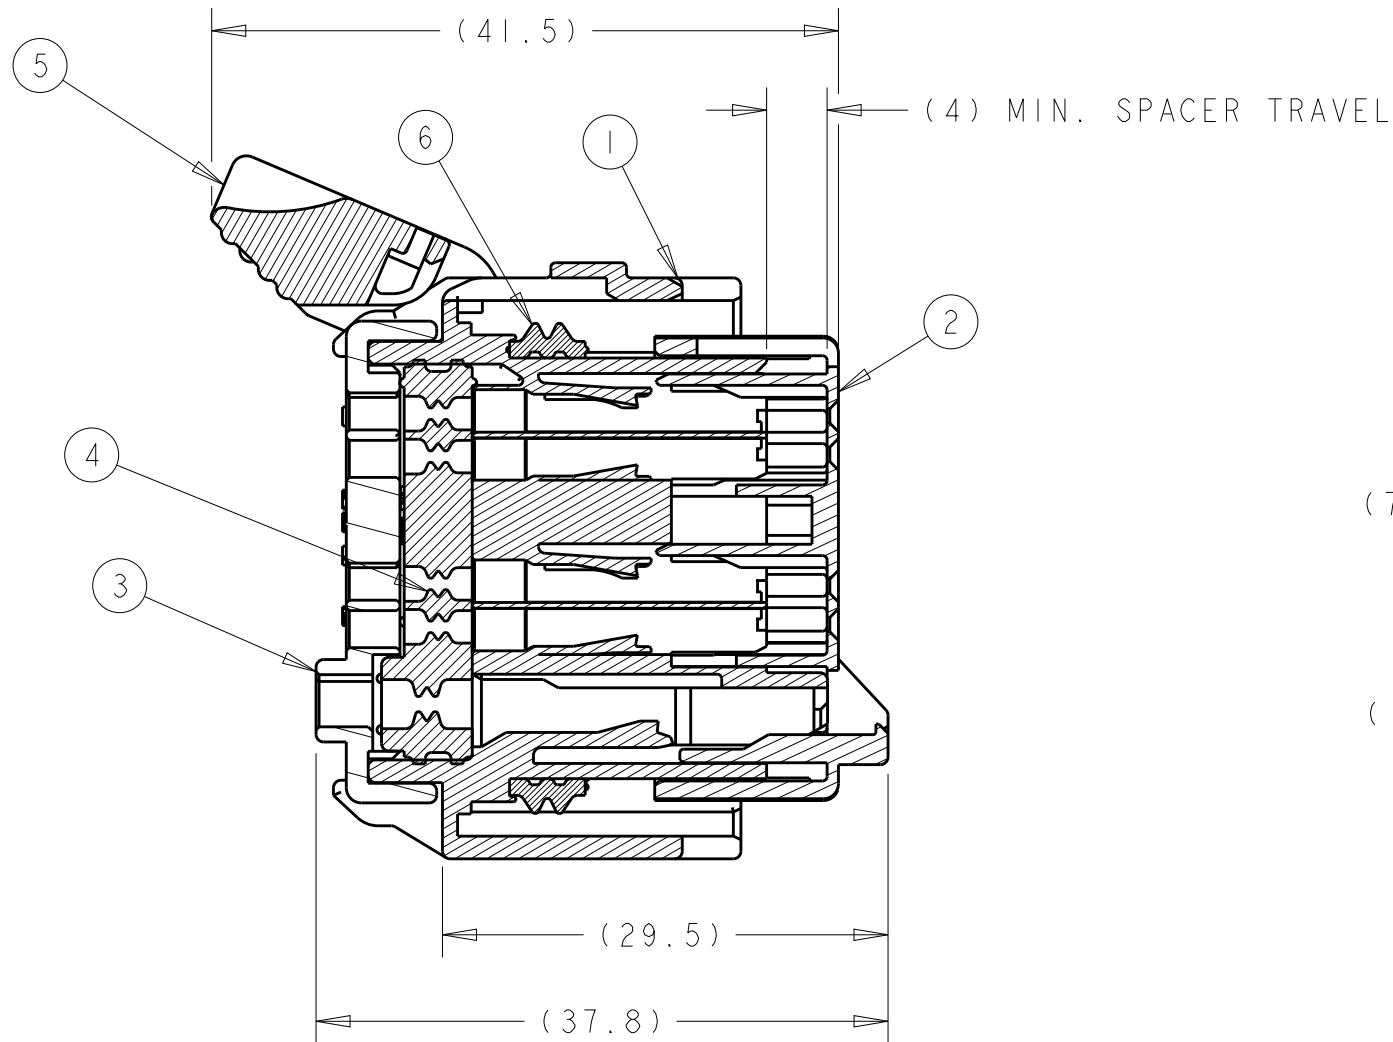

SECTION A-A
SPACER AND LEVER IN
PRE-SEATED POSITION
(DELIVERY CONDITION)

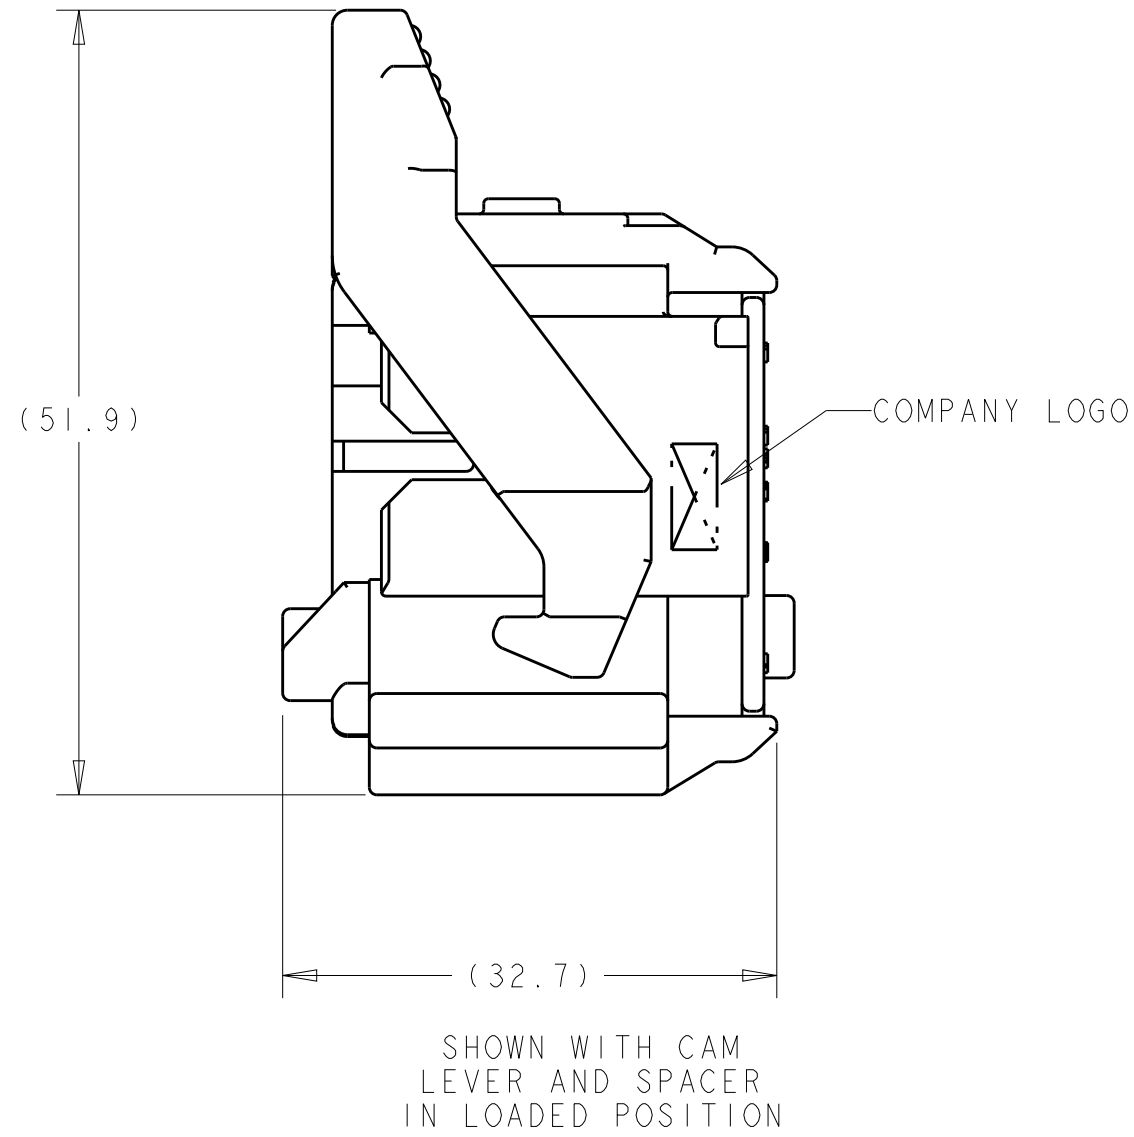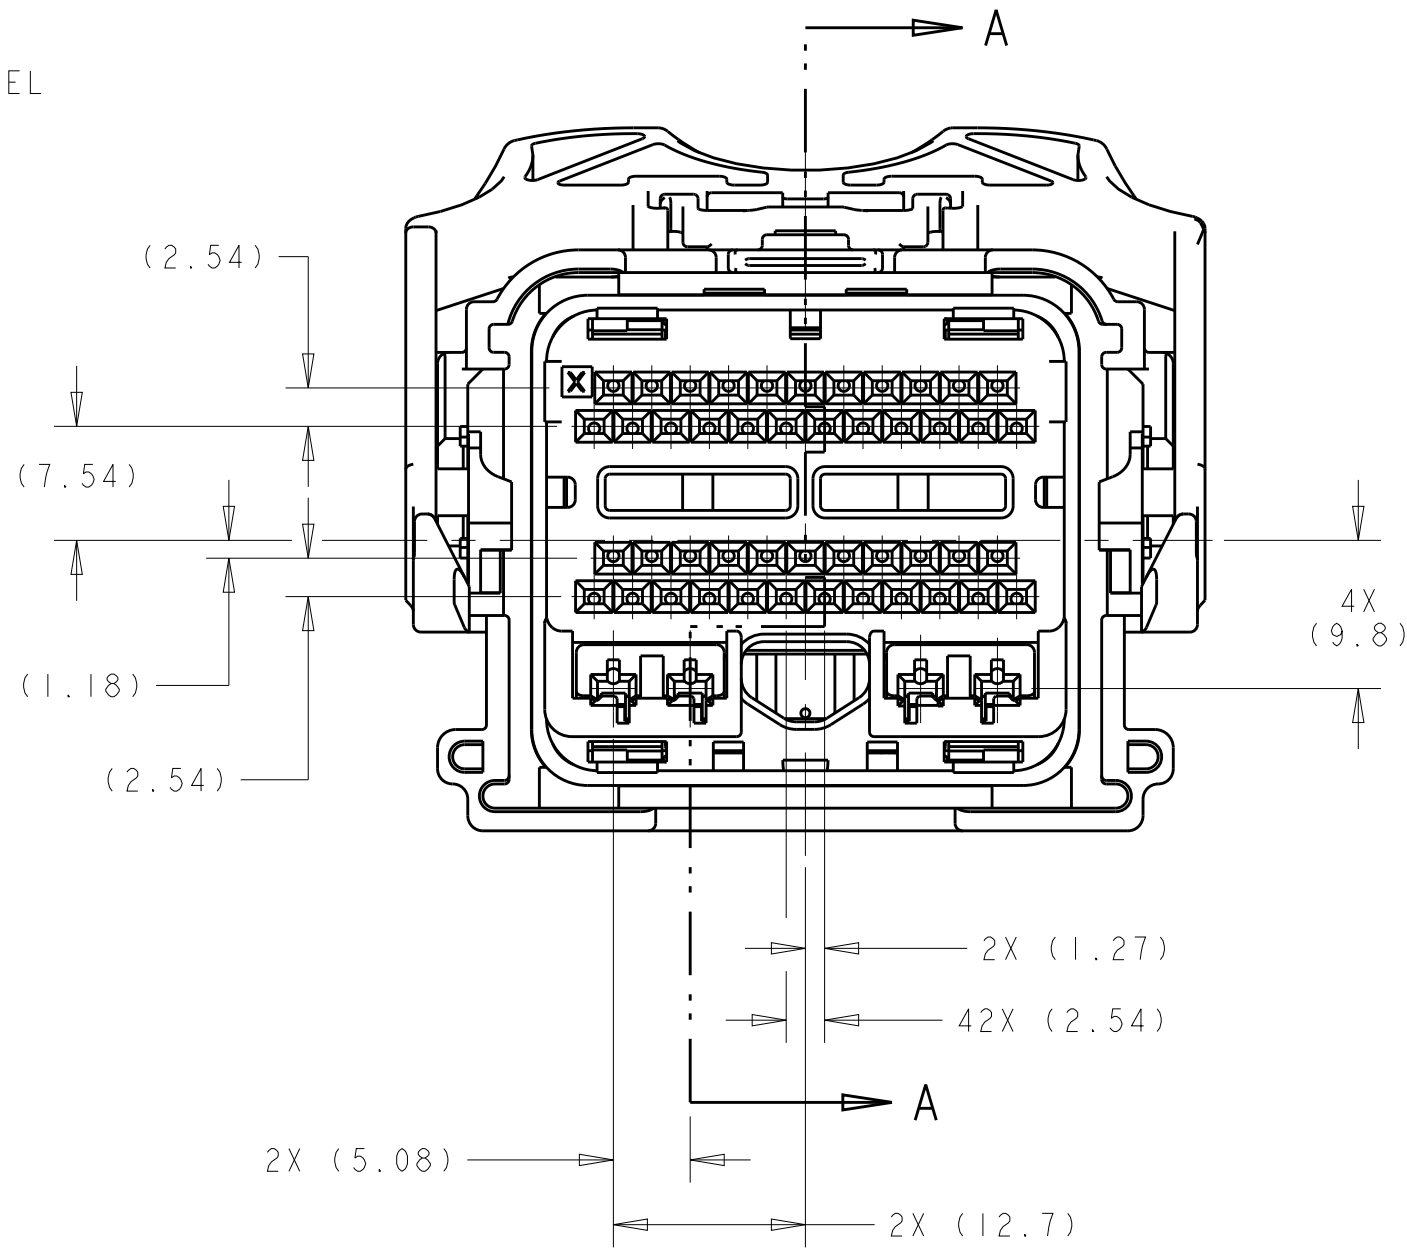

SHOWN WITH CAM
LEVER AND SPACER
IN LOADED POSITION

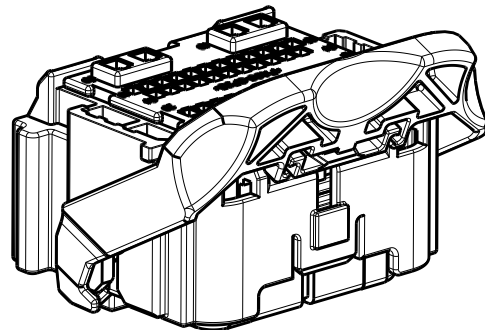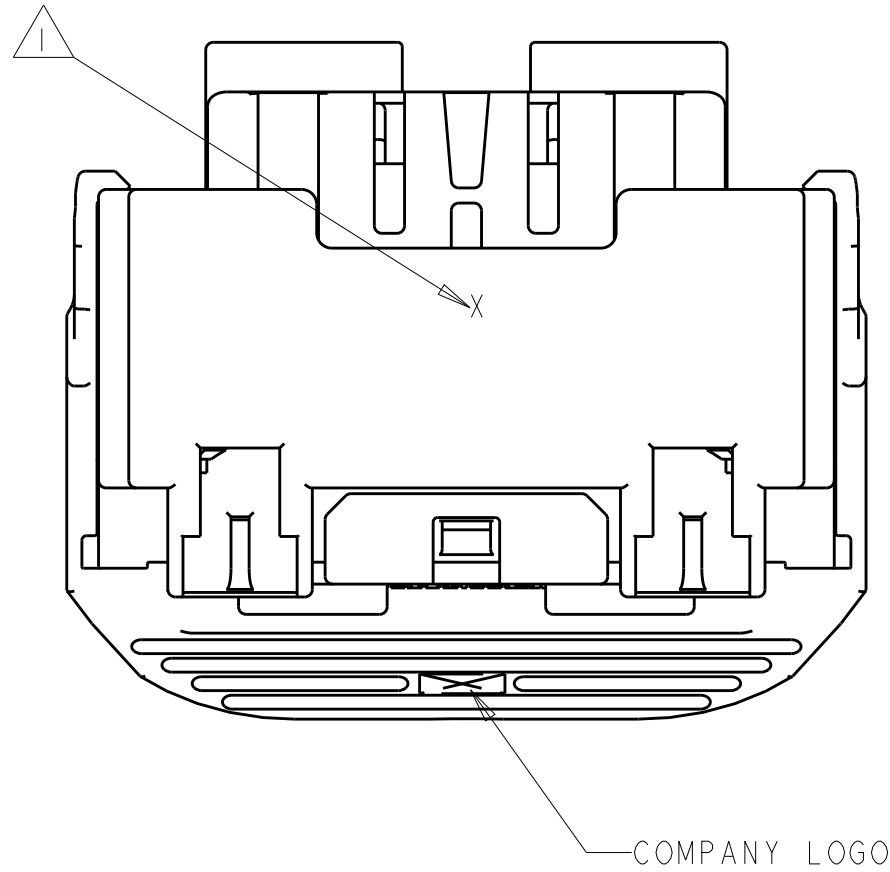

SCALE 1:1

GREEN	PERIMETER SEAL	6
GRAY	LEVER	5
BROWN	GROMMET SEAL	4
BLACK	COVER	3
RED	SPACER	2
BLACK	HARNESS, KEY "A"	1
PART COLOR	DESCRIPTION	ITEM NO.


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CRISAMORE 21JUL2004	 TE Connectivity	
		CHK M. HITCHCOCK 21JUL2004		
		APVD C. MARTIN 21JUL2004		
		PRODUCT SPEC -		
DIMENSIONS:		APPLICATION SPEC		NAME ASSEMBLY, 50-WAY, KEY A, PCM HARNESS
mm				
		0 PLC	±.3	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		1 PLC	±0.3	
		2 PLC	±0.10	
		3 PLC	±.	
		4 PLC	±.	
ANGLES		±1°		
FINISH		WEIGHT		
-		-		
MATERIAL		Customer Drawing		
-				

APPLICABLE HEADER INTERFACE SPECIFICATION
SHOWN WITHOUT KEYING OPTIONS









REVISIONS				
P	LTR	DESCRIPTION	DATE	OWN APVD
-	-	SEE SHEET 1	-	-

NOTES: UNLESS OTHERWISE SPECIFIED

1. GENERAL TOLERANCE:
±0.3 ALL ONE PLACE DIMENSIONS
±0.10 ALL TWO PLACE DIMENSIONS
±1°00' ALL ANGULAR DIMENSIONS
2. DRAFT ANGLE PERMISSIBLE ONLY WITHIN DRAWING TOLERANCE.
3. SEALING SURFACE, NO WITNESS LINES OR DAMAGE PERMITTED.
4. ALL UNMARKED RADI TO BE 0.5 MAX., UNLESS OTHERWISE SPECIFIED.
5. VENT HOLE SIZE AND LOCATION IS OPTIONAL.
6. THIS AREA TO REMAIN CLEAR FOR THE HARNESS ASSEMBLY.
7. TERMINAL POSITION IDENTIFICATION.

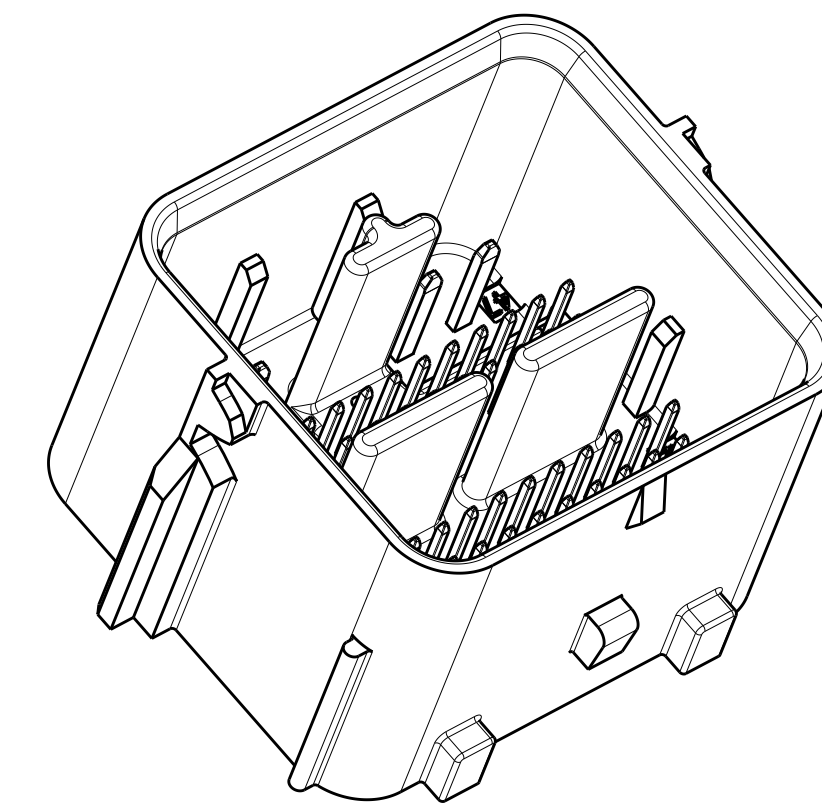

SCALE 2:1

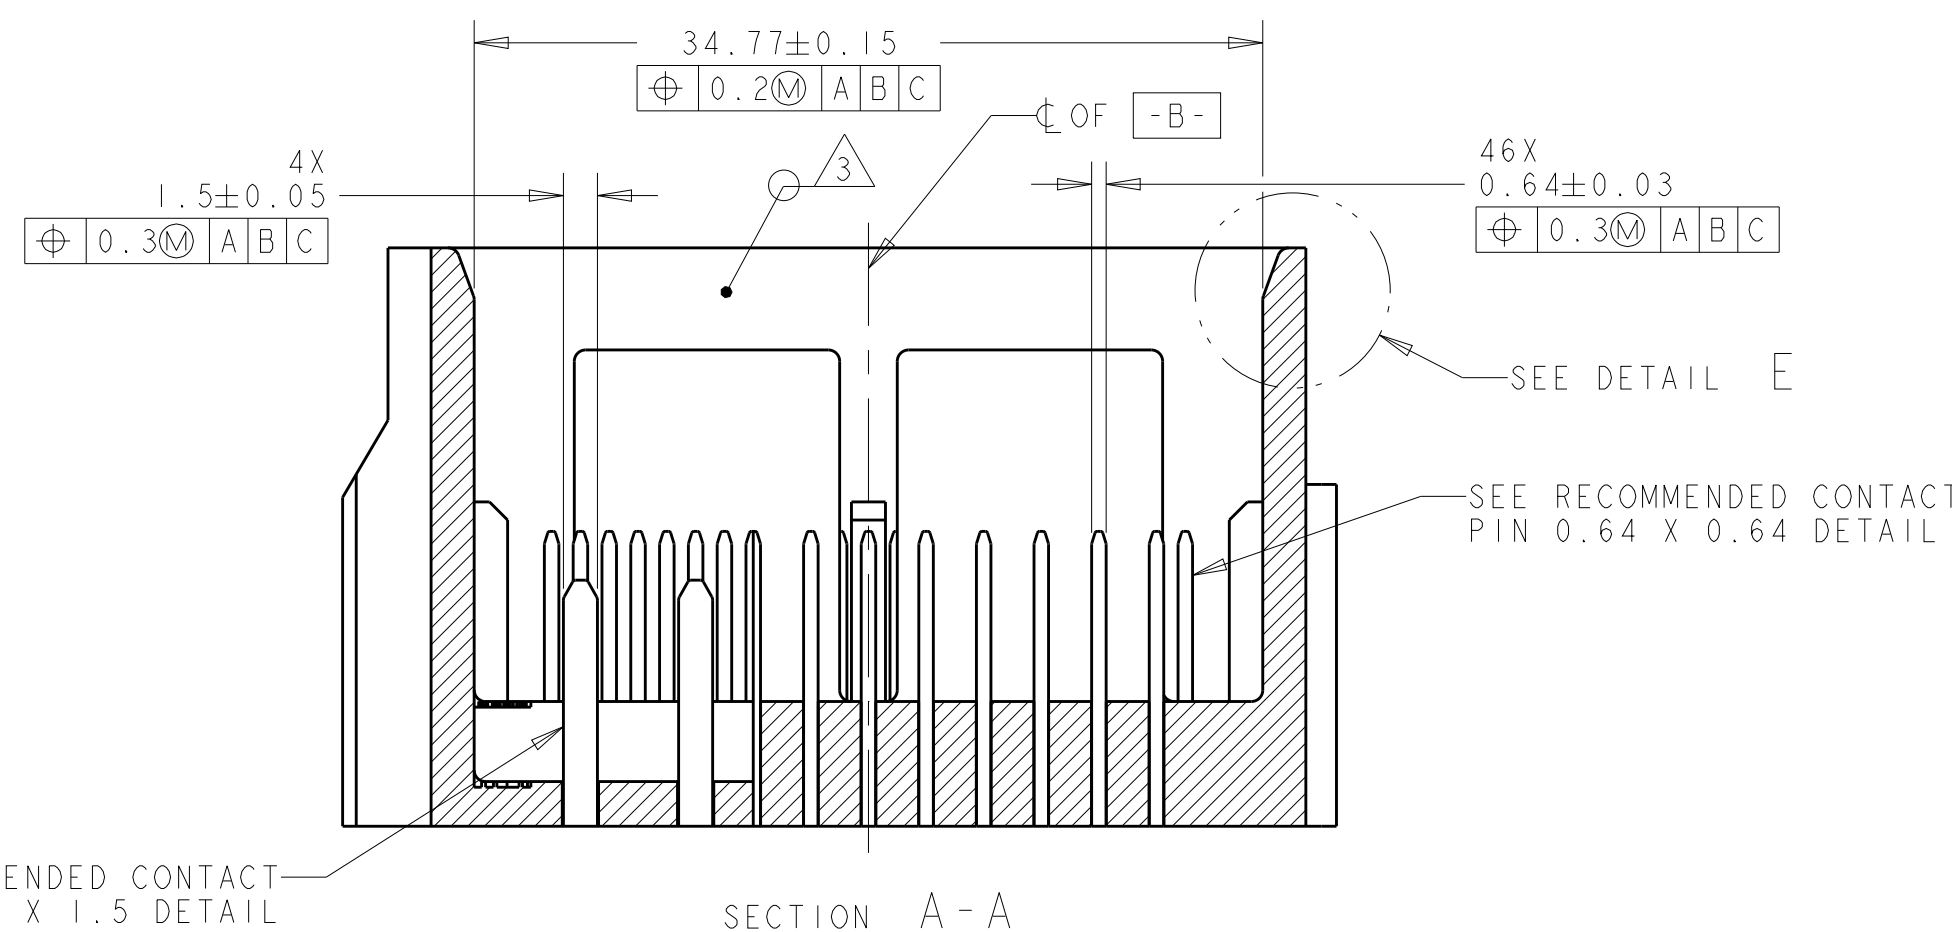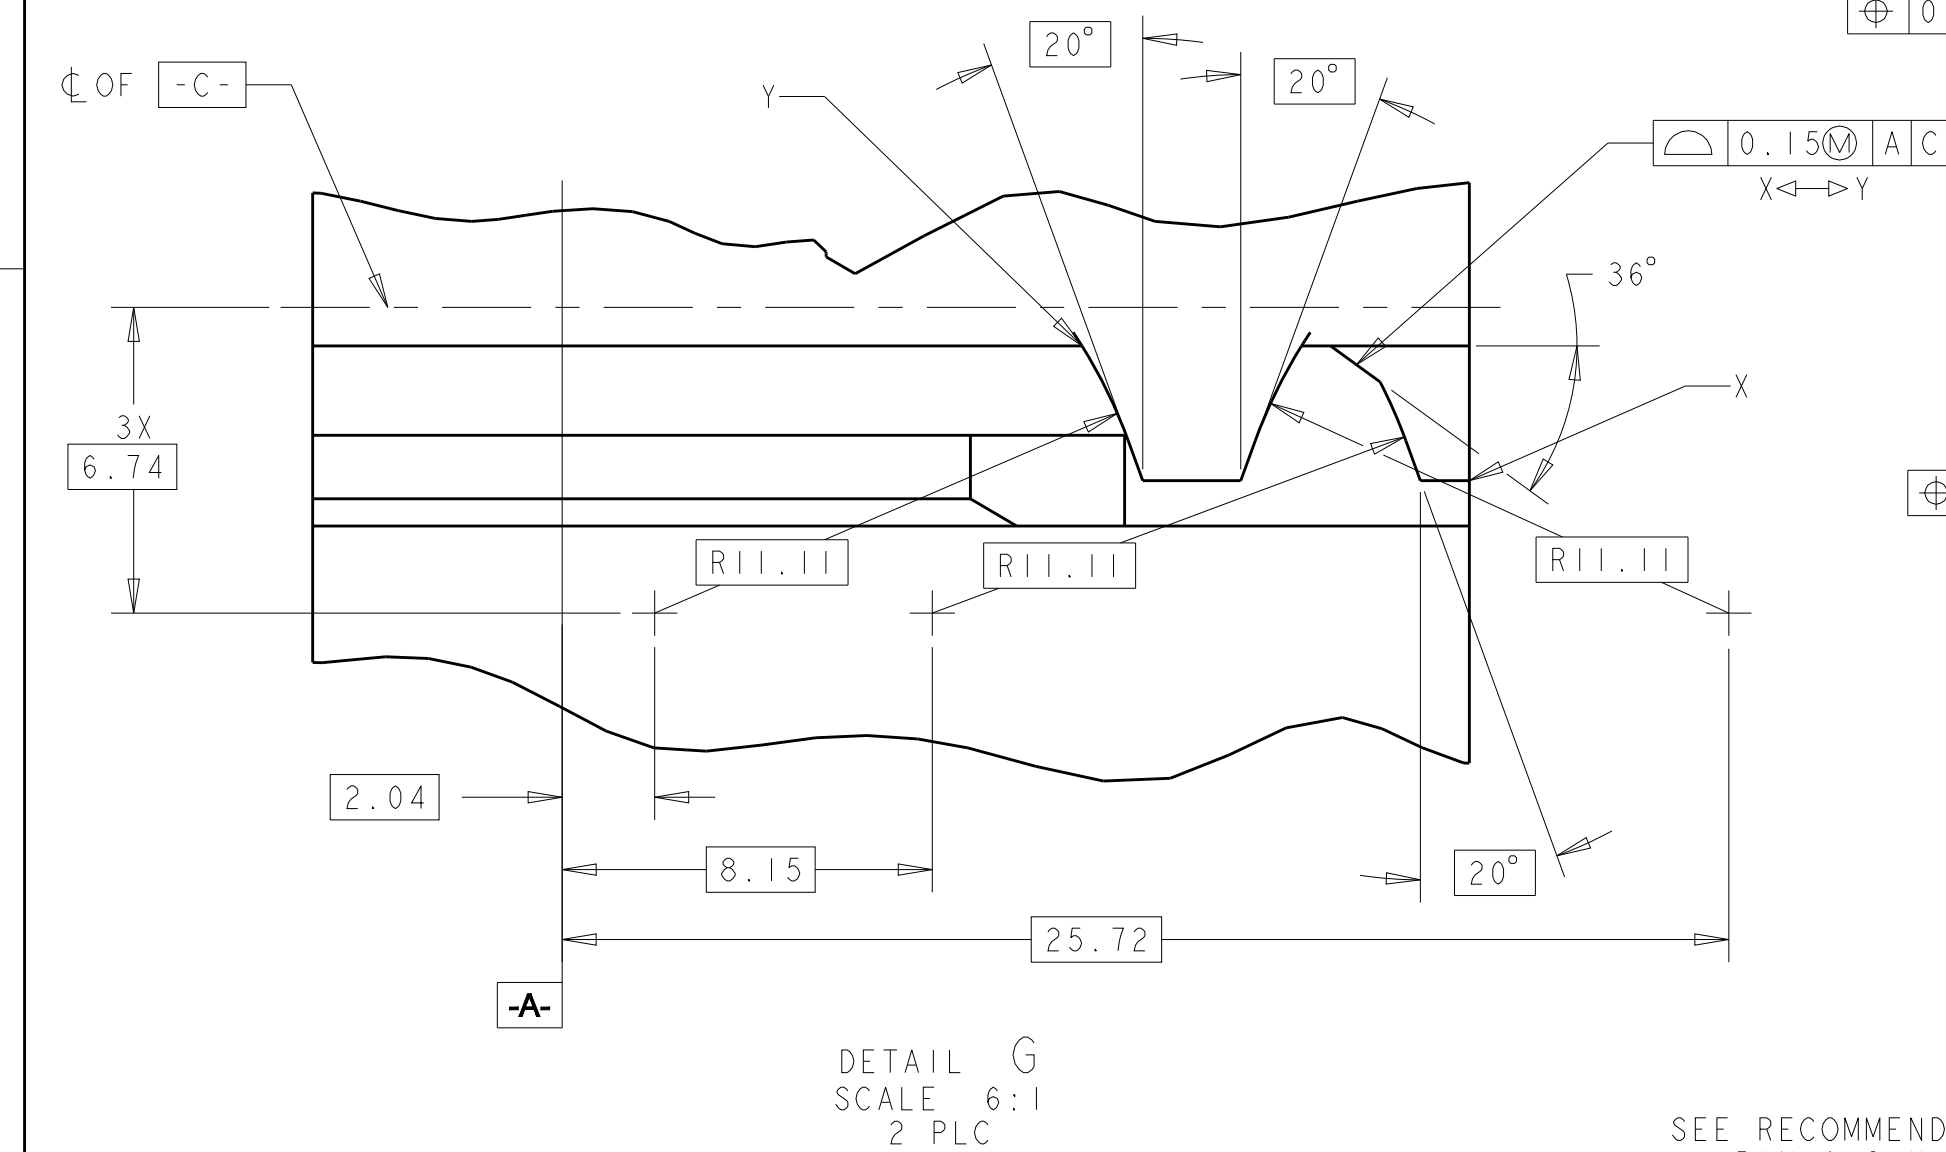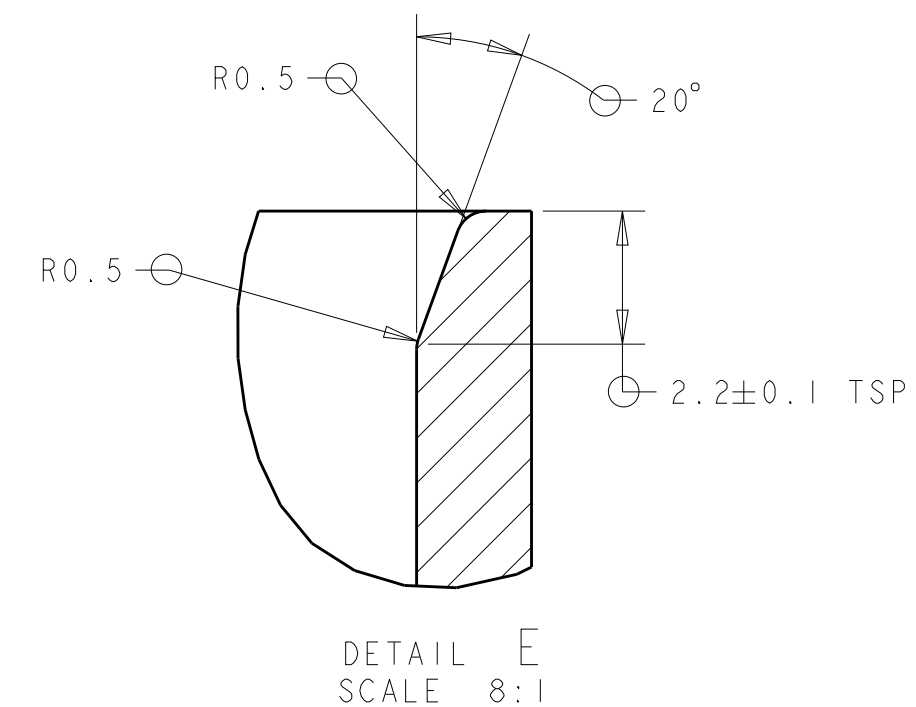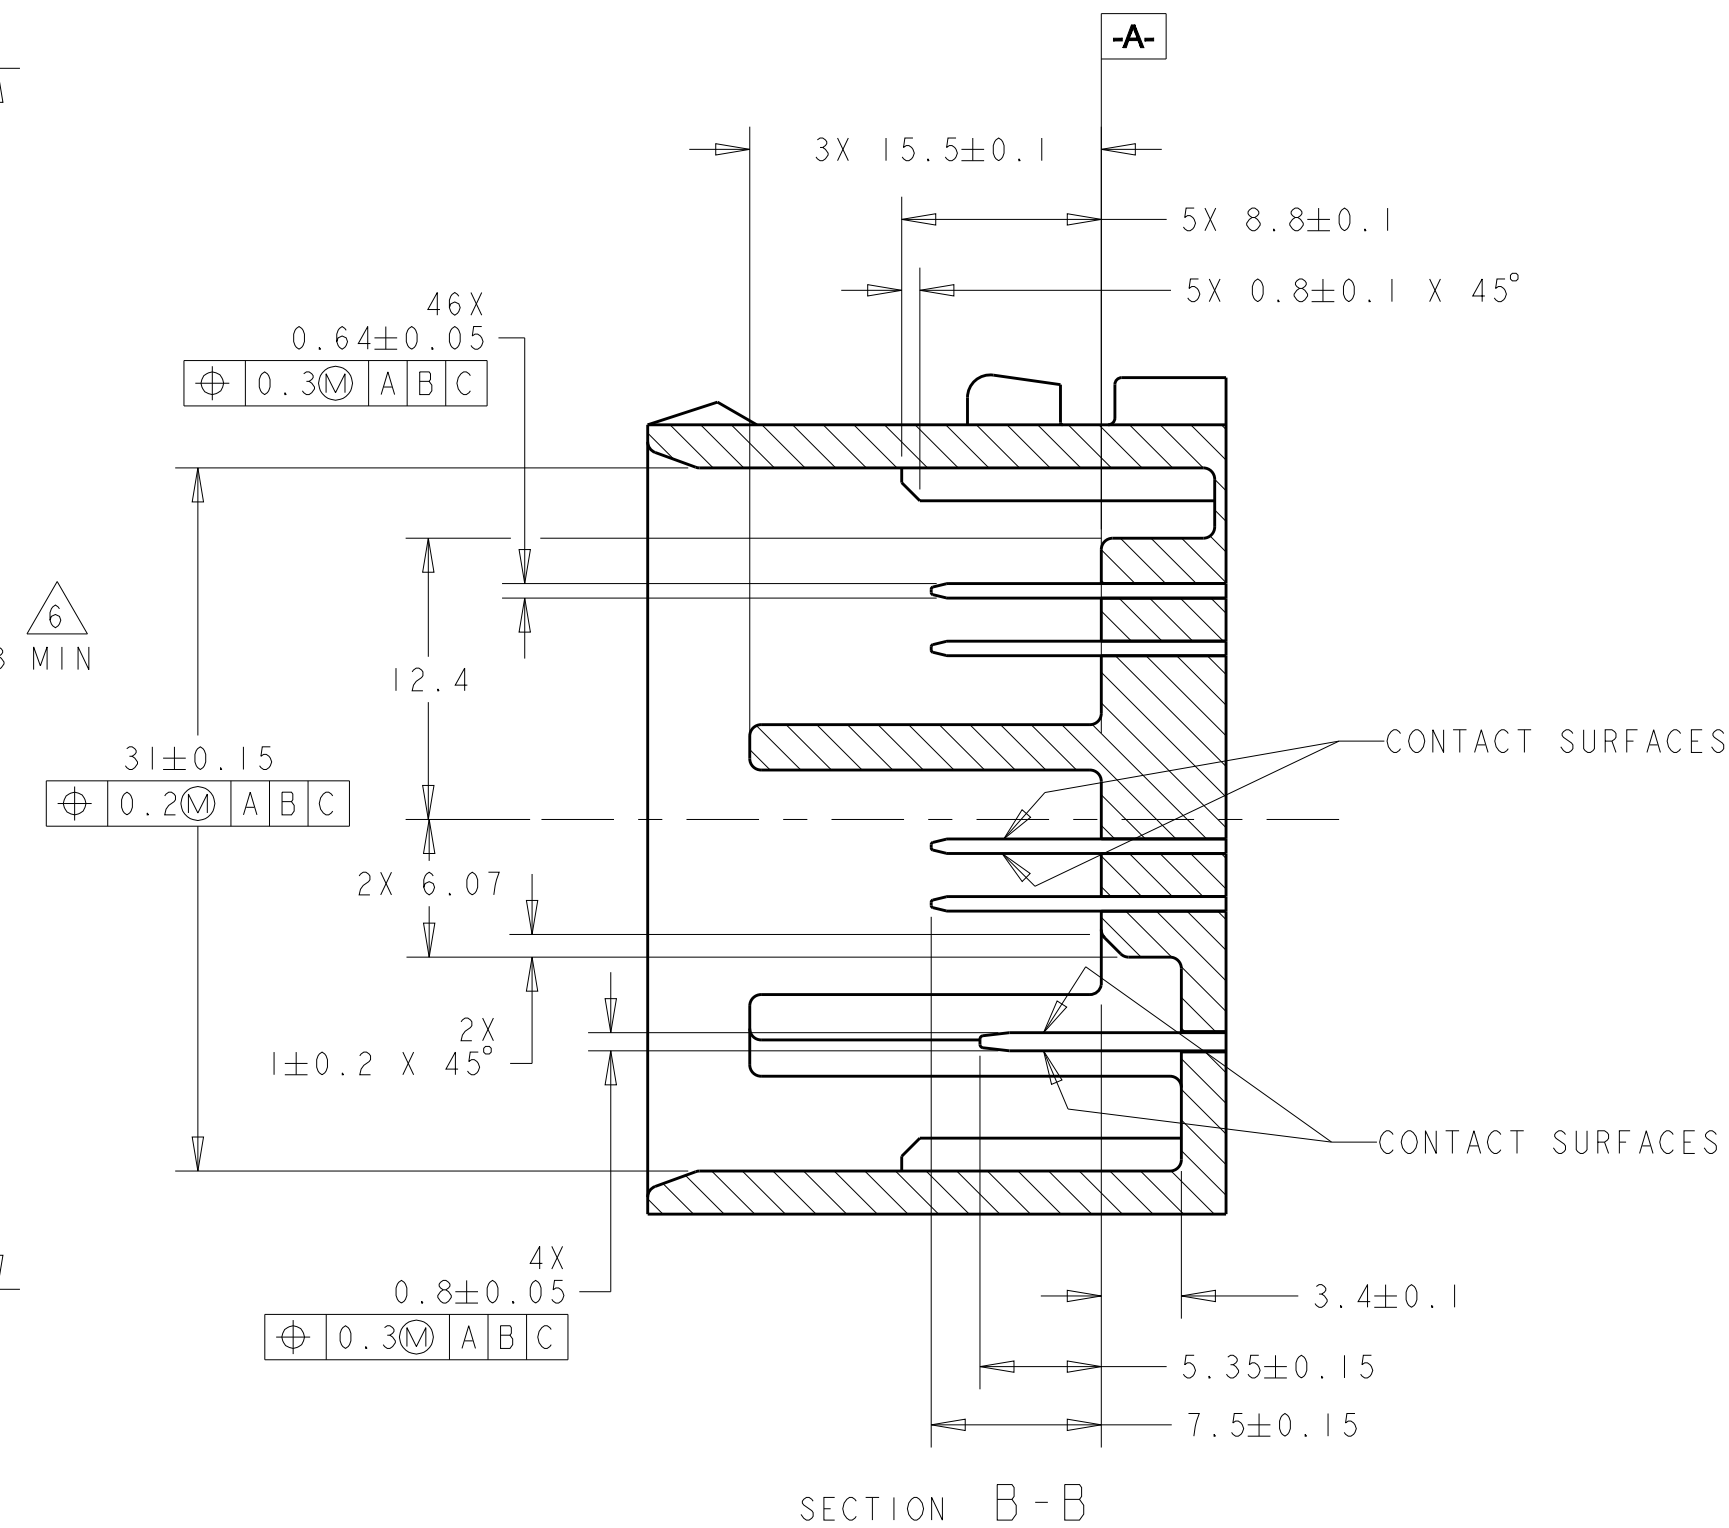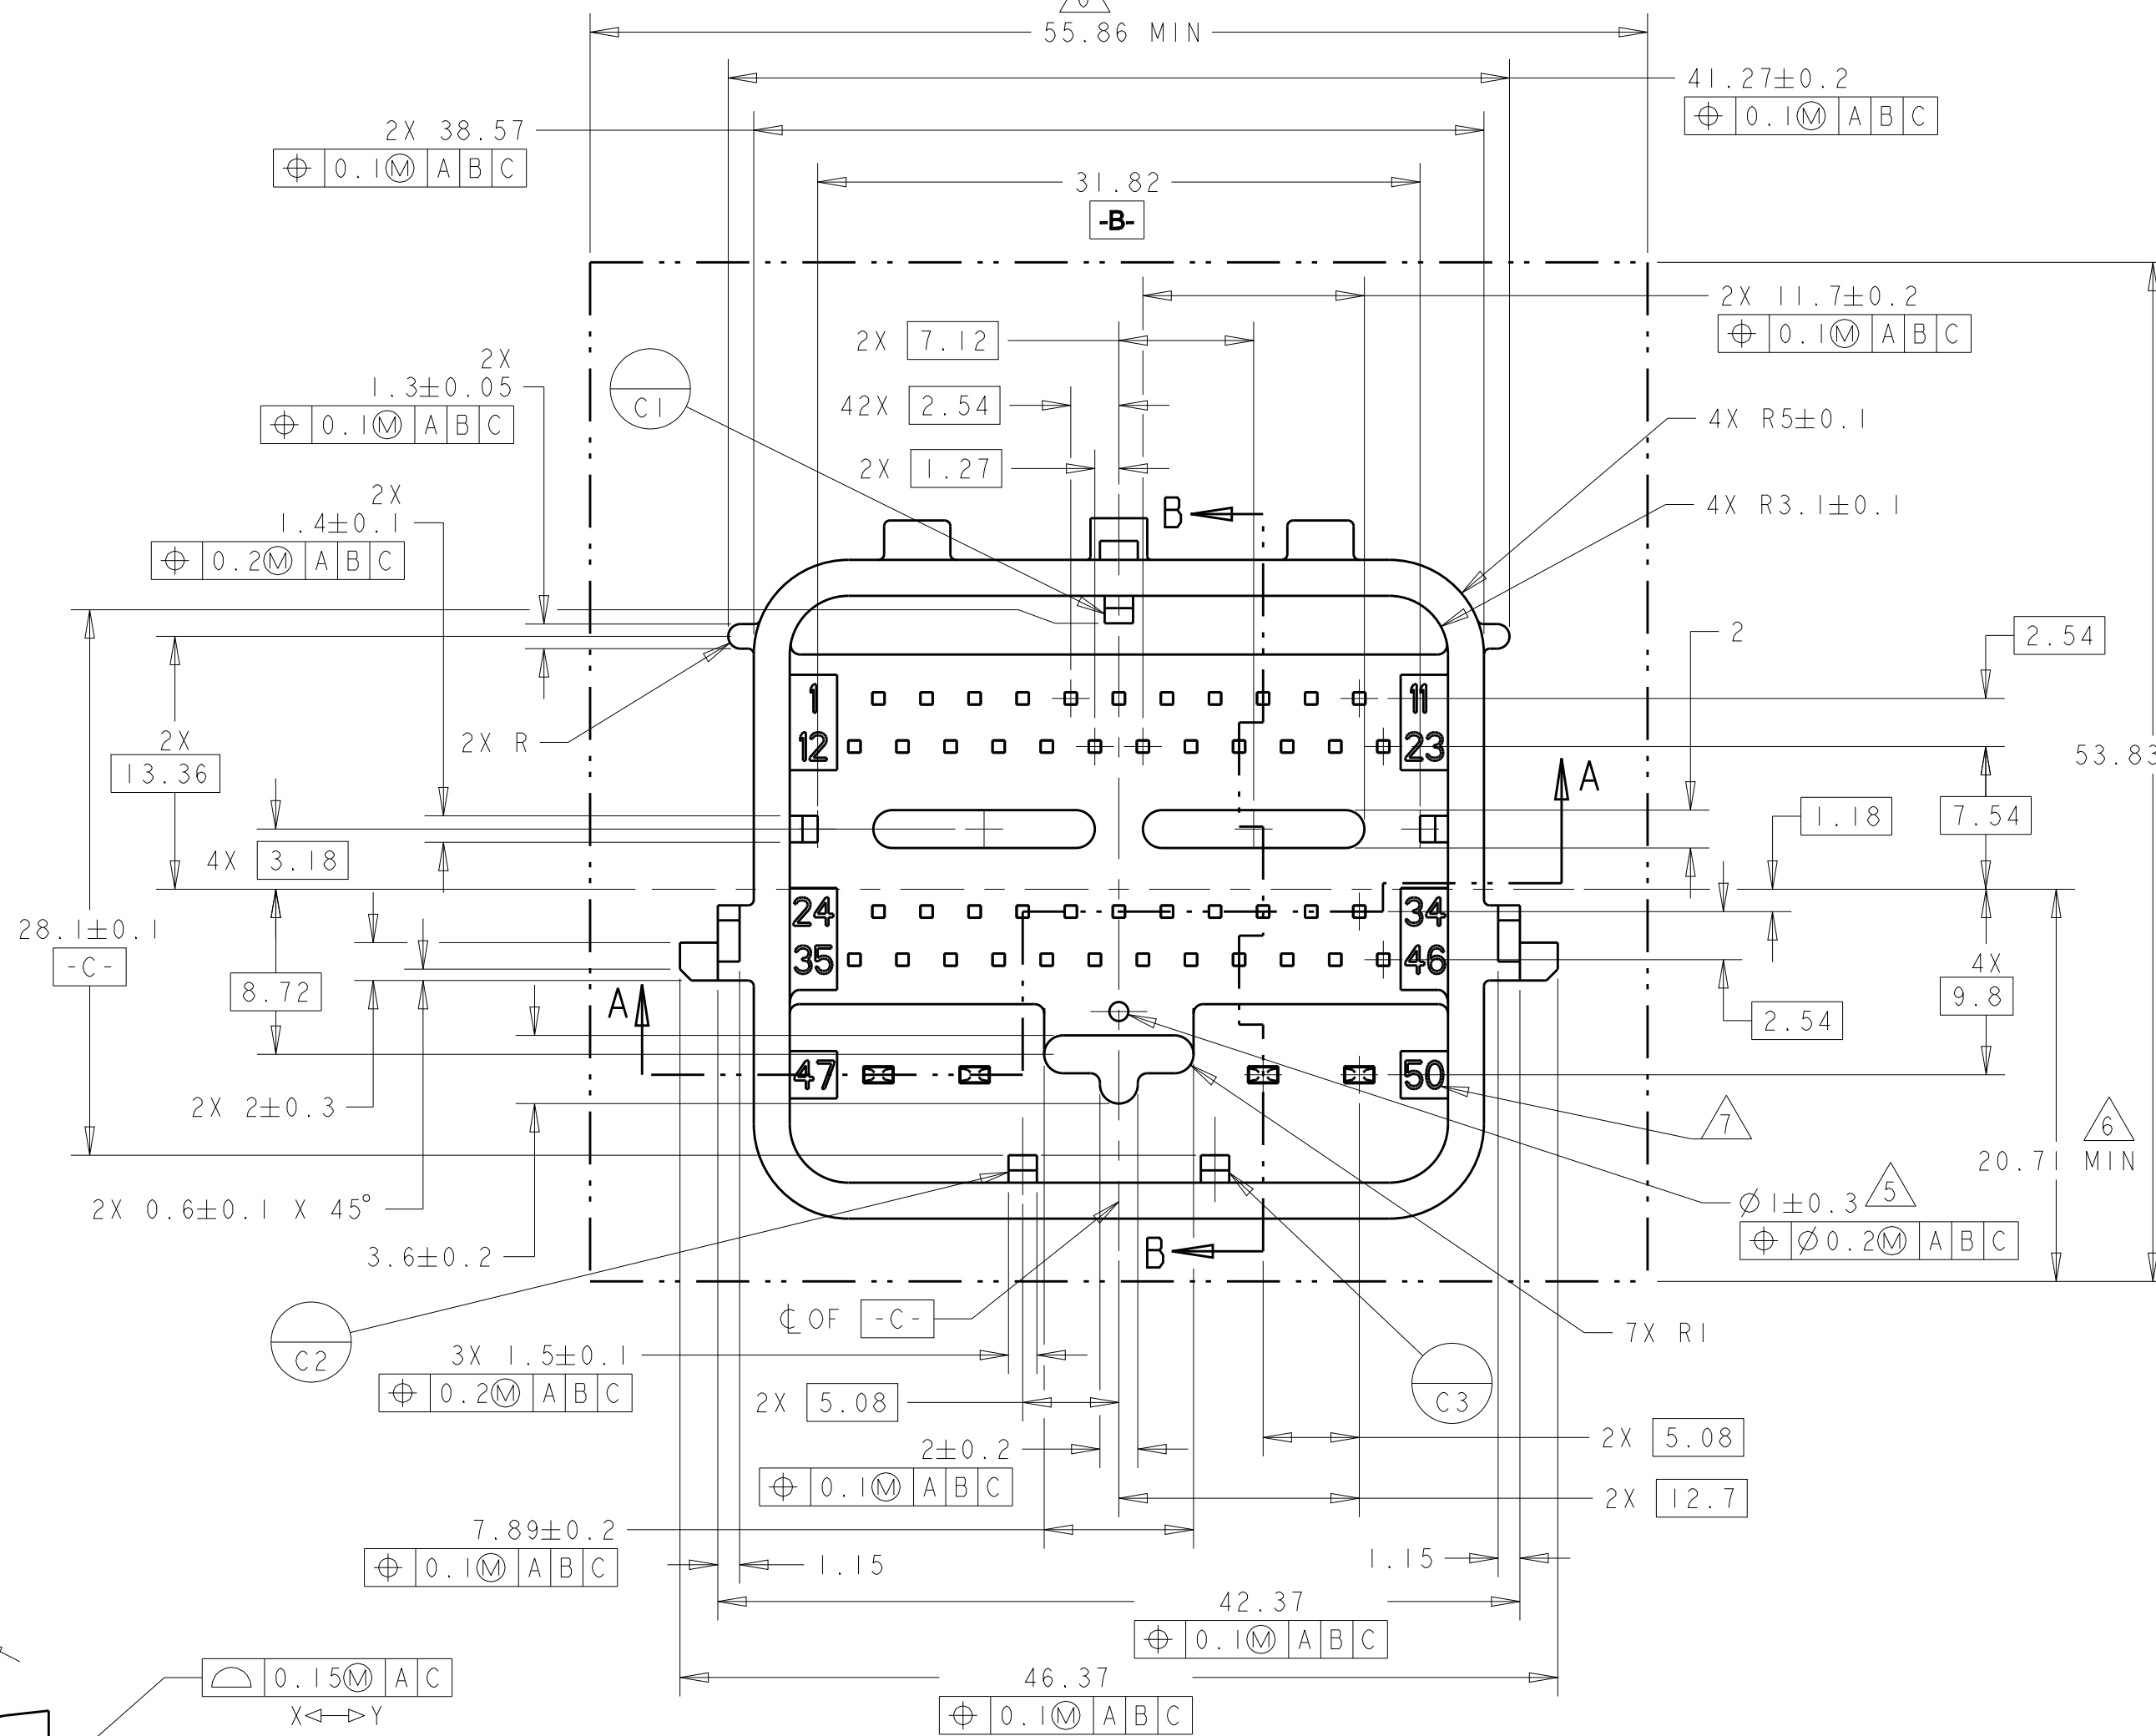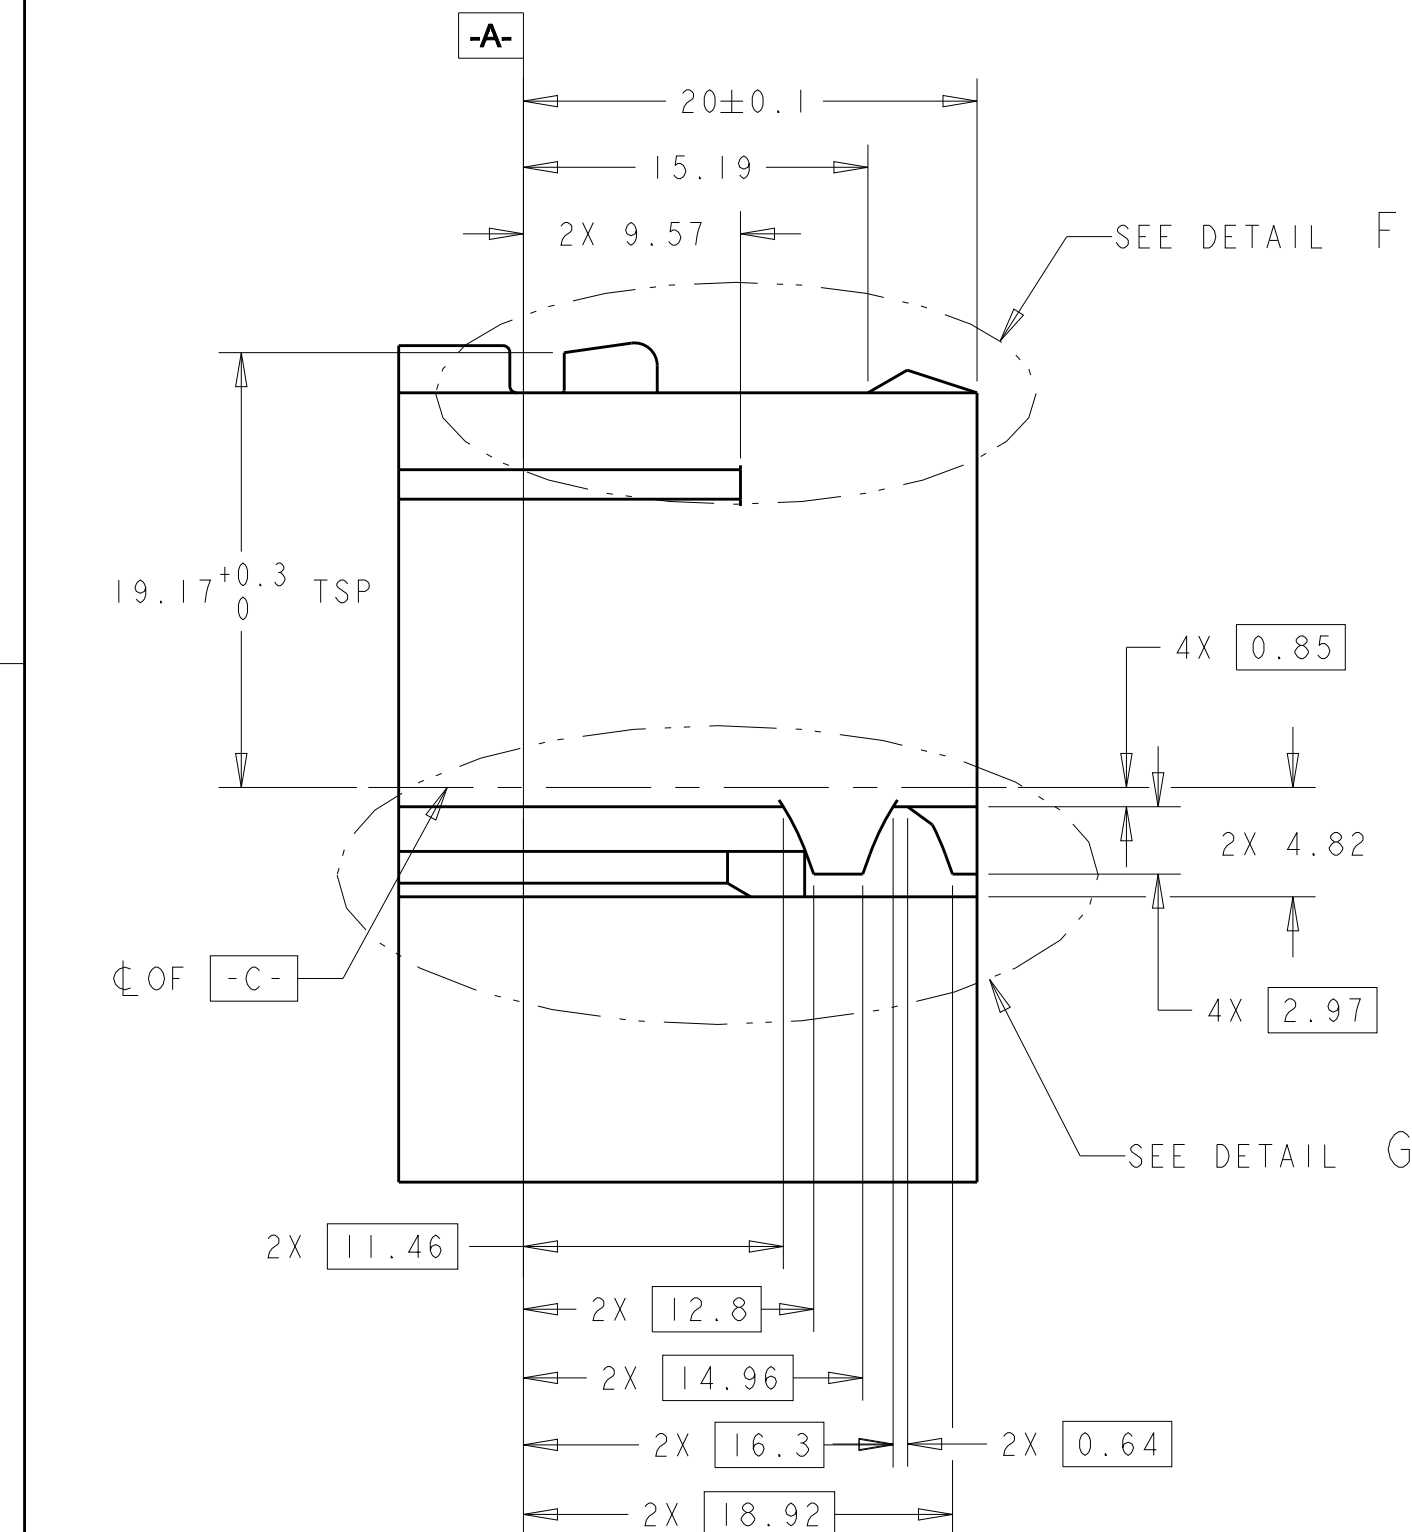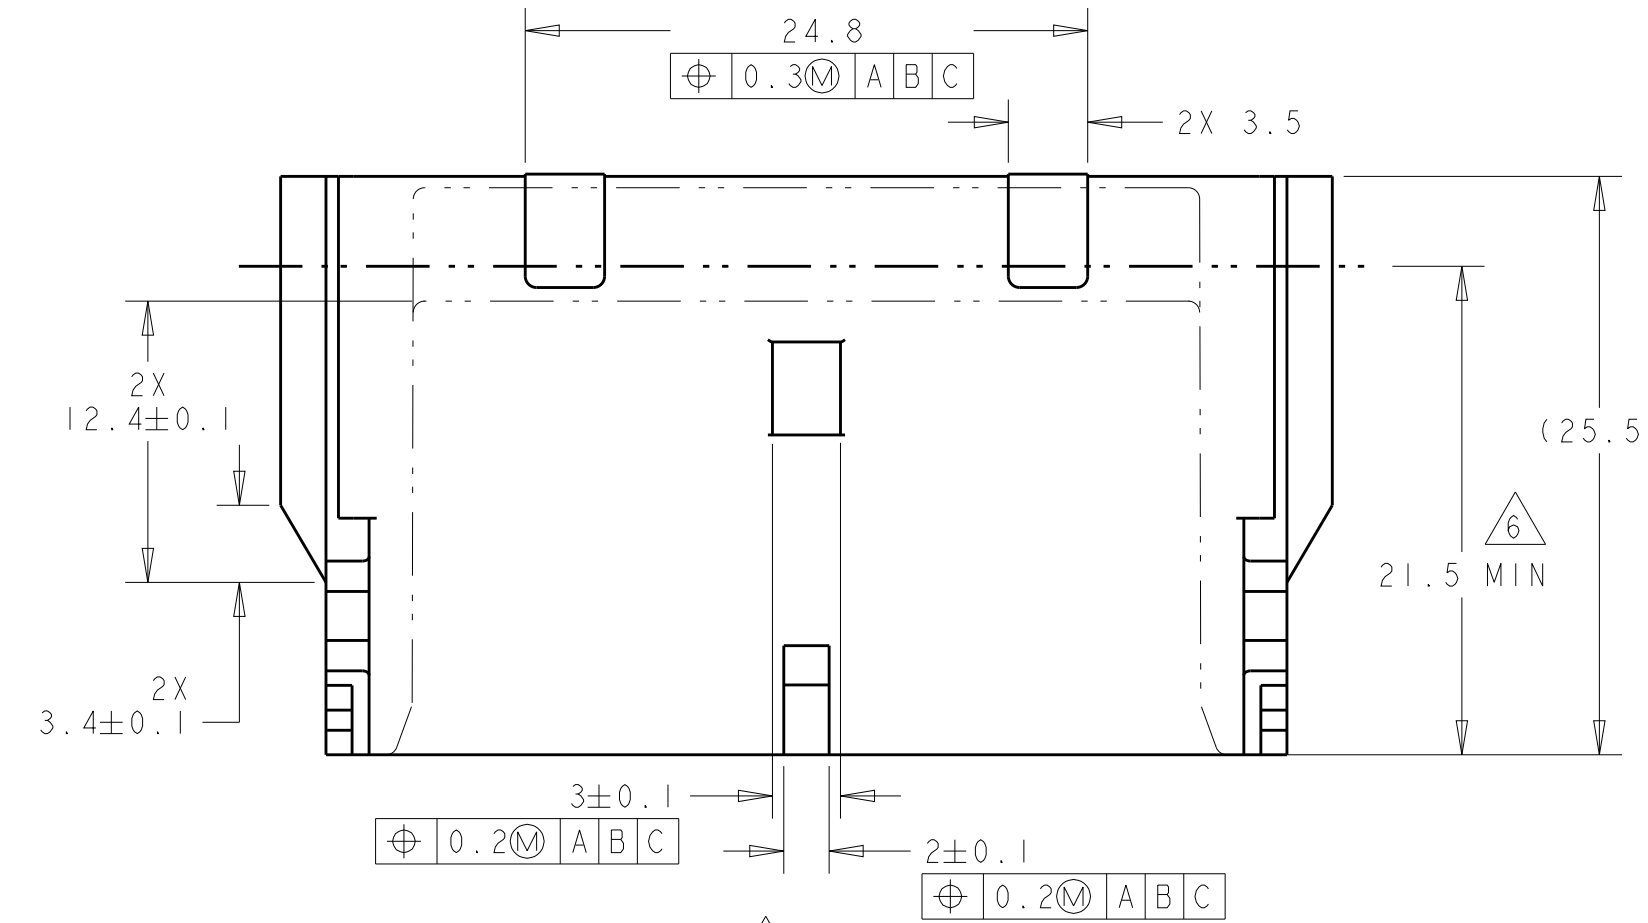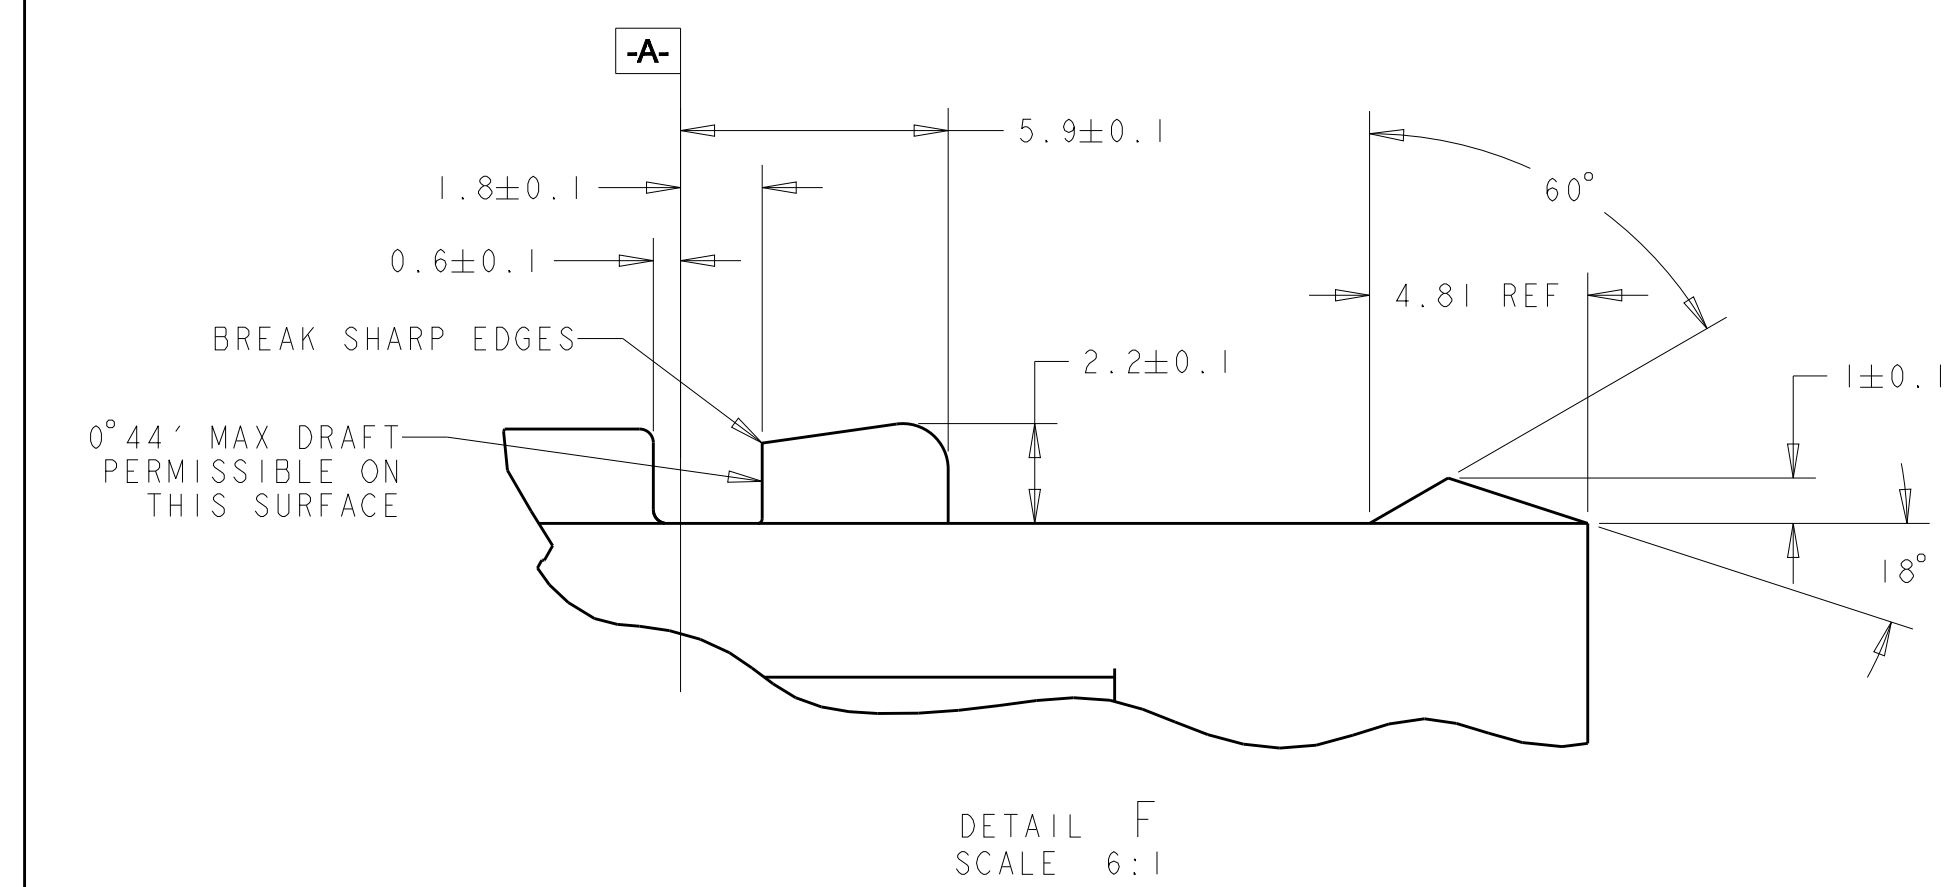

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN B. CRISAMORE 21JUL2004		NAME TE Connectivity ASSEMBLY, 50-WAY, KEY A, PCM HARNESS		RESTRICTED TO -
DIMENSIONS: mm		CHK M. HITCHCOCK 21JUL2004				
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. MARTIN 21JUL2004		SIZE A100779
		0 PLC ±. 1 PLC ±0.3 2 PLC ±0.10 3 PLC ±. 4 PLC ±. ANGLES ±1°		PRODUCT SPEC - APPLICATION SPEC -		
MATERIAL -		FINISH -		WEIGHT -		Customer Drawing
				SCALE 2:1		
						REV A16

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20	BY -	ALL RIGHTS RESERVED.

REVISIONS					
R#	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET I	-	-	-

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. CRISAMORE	21JUL2004	 TE Connectivity		
		CHW M. HITCHCOCK	21JUL2004			
		APVD G. MARTIN	21JUL2004			
		PRODUCT SPEC -				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, 50-WAY, KEY A, PCM HARNESS		
mm						
		0 PLC	±.			
		1 PLC	±0.3			
		2 PLC	±0.10			
		3 PLC	±.			
		4 PLC	±.			
		ANGLES	±1°			
MATERIAL	FINISH	WEIGHT		SIZE	CAGE CODE	DRAWING NO
-	-	-		A1	100779	C1438691
-	-	Customer Drawing		SCALE	2:1	SHEET 3 of 4
				REV	1	1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-1438691-4](#)