

SPECIFICATION CONTROL DRAWING

55A6691

TITLE

TWO CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 600 VOLT

Date


4-7-92

Revision

B

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

COMPONENT WIRES - 55A6687

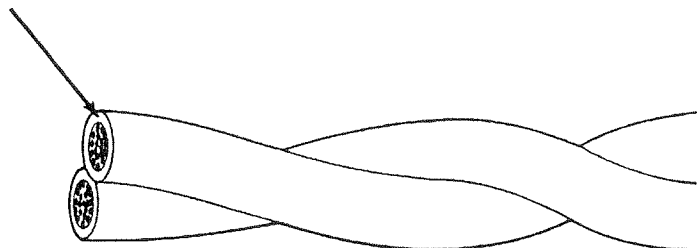

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lbs/1000 ft)
		NOMINAL	MAXIMUM	
55A6691-22-*	22	.084	.086	5.7
55A6691-20-*	20	.098	.102	8.8
55A6691-16-*	16	.134	.138	16.9

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

* BLOCKING: 200 ± 3°C for 6 hours

CABLE LAY:

AWG 22, 0.92 inch (minimum), 1.5 inch (maximum)

AWG 20, 1.1 inch (minimum), 1.5 inch (maximum)

AWG 16, 1.5 inch (minimum), 2.0 inch (maximum)

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

* FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 inch (maximum); no flaming of facial tissue

PART NUMBER:

The *** in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors.

Example: AWG 22, white and black component wires: 55A06691-22-9/0

* Qualification Test

NOTE: Nominal values are for information only.
Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
(415) 361 3333 TWX 910 373 1728

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55A6691-16-6L/6L-CS2266](#) [55A6691-20-2L/2L-CS2266](#) [55A6691-22-5L/5L-CS2266](#)