

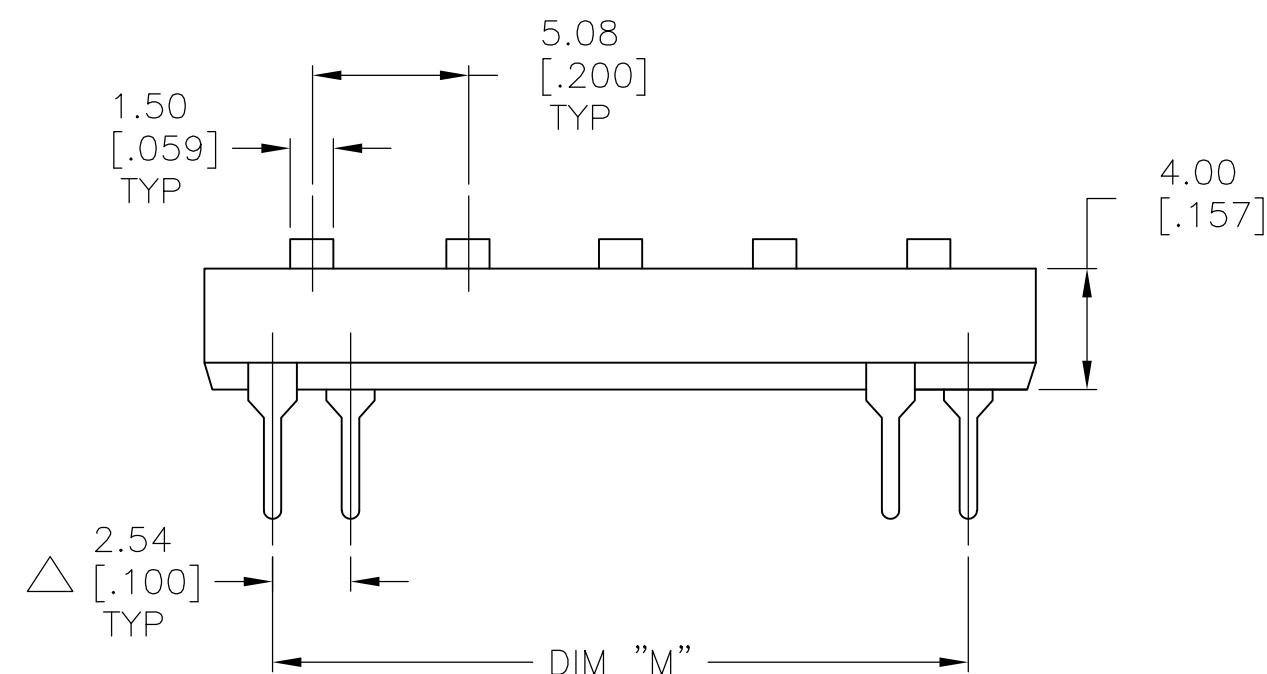
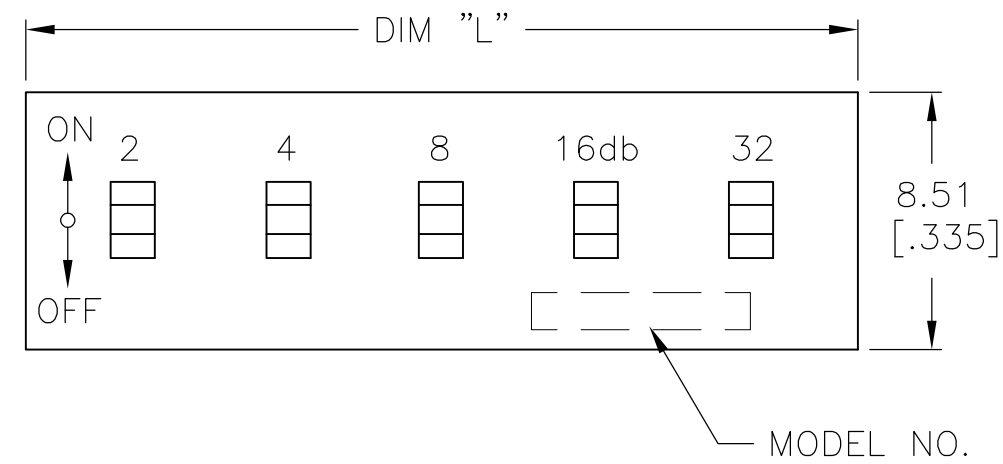



LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	ECO 07-020114	28AUG07	MB	MS
			B1	REVISED PER ECO-09-024927	07NOV09	KK	AEG

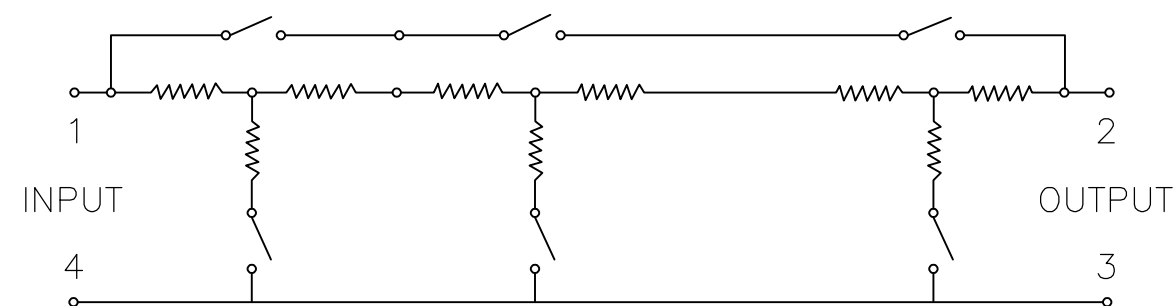


SEE SHEET 2 FOR TERMINAL
TYPES AND DIMENSIONS

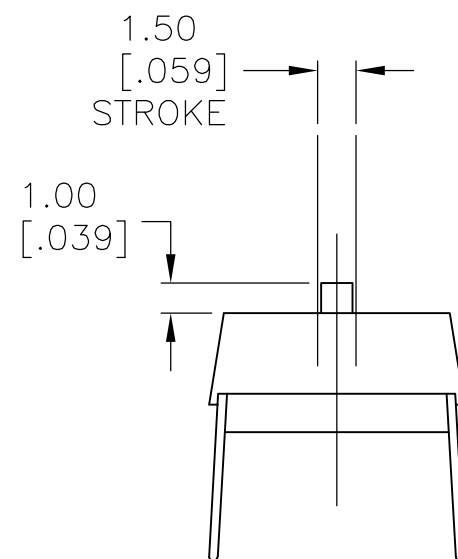

CIRCUIT: T TYPE UNBALANCED (SWITCH IN CENTER NEUTRAL POSITION)

	ORANGE	3-9db \pm .10db	5MHz	75 Ohm	50mW	0.700	0.876	4	ATT475C04	1825284-3
	ORANGE	3-9db \pm .10db	5MHz	75 Ohm	50mW	0.900	1.076	5	ATT575C04	1825284-2
OBSOLETE 	BLACK	25-30db \pm .35db	200kHz	600 Ohm	50mW	0.900	1.076	5	ATT5600C04	1825284-1
	CASE/COVER COLOR	db RANGE TOLERANCE	FREQUENCY	IMPEDANCE	RATED POWER	DIM "M"	DIM "L"	NUMBER OF POSN.	T&B P/N	TE P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN CMM	07AUG86	Tyco Electronics Corporation	
		CHK PS	07JUL88	Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME	ATT SERIES	
	0 PLC ± -	PRODUCT SPEC	DIP SWITCH		
	1 PLC ± -	—	—		
	2 PLC ± .01	APPLICATION SPEC	—		
	3 PLC ± -	—	SIZE	CAGE CODE	DRAWING NO
	4 PLC ± -	—	A200779		C-1825284
	ANGLES ± 1°	WEIGHT	—		RESTRICTED TO
MATERIAL	FINISH	—			
SEE SPECIFICATION	—	CUSTOMER DRAWING			
		SCALE	SHEET		REV
		4:1	1 of 2		B1

SPECIFICATIONS:

MATERIAL:

BASE, PBT UL94V-0, SEE P/N TABLE

COVER, PBT UL94V-0, SEE P/N TABLE

ACTUATOR, PBT UL94V-0, WHITE

FIXED CONTACT/TERMINAL, COPPER ALLOY, PLATE—GOLD/NICKEL

MOVING CONTACT, COPPER ALLOY, PLATE-GOLD/NICKEL

ELECTRICAL:

CONTACT RATING SWITCHING, 0.4 VA @ 20V DC

INITIAL CONTACT RESISTANCE, 50 MILLIOHMS MAX.

INSULATION RESISTANCE, 100 MEGOHMS MIN. @ 100V DC.

DIELECTRIC STRENGTH, 500V AC RMS @ SEA LEVEL

LIFE, 5,000 CYCLES

MECHANICAL:

OPERATING FORCE, LESS THAN 800 GRAMS

TRAVEL, .059

ENVIRONMENTAL:

OPERATING TEMPERATURE: -30 TO +85 DEGREES C

STORAGE TEMPERATURE: -45 TO +100 DEGREES C

CLEANING, AQUEOUS OR SOLVENT

SOLDER HEAT RESISTANCE, PER 109-202, CONDITION B

SOLDERABILITY- PER JIS-C-0050 & JIS-C-00053

NOTES:

1. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI


D

C

B

A

1825284

 Tyco Electronics		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
NAME _____			
ATT SERIES _____ DIP SWITCH _____ - _____			
SIZE _____	CAGE CODE _____	DRAWING NO _____	RESTRICTED TO _____
A2 00779 C-1825284			—
SCALE 1:1		SHEET 1 OF 1	REV D1



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	OO		—	SEE SHEET 1	—	—

D

C

B

A

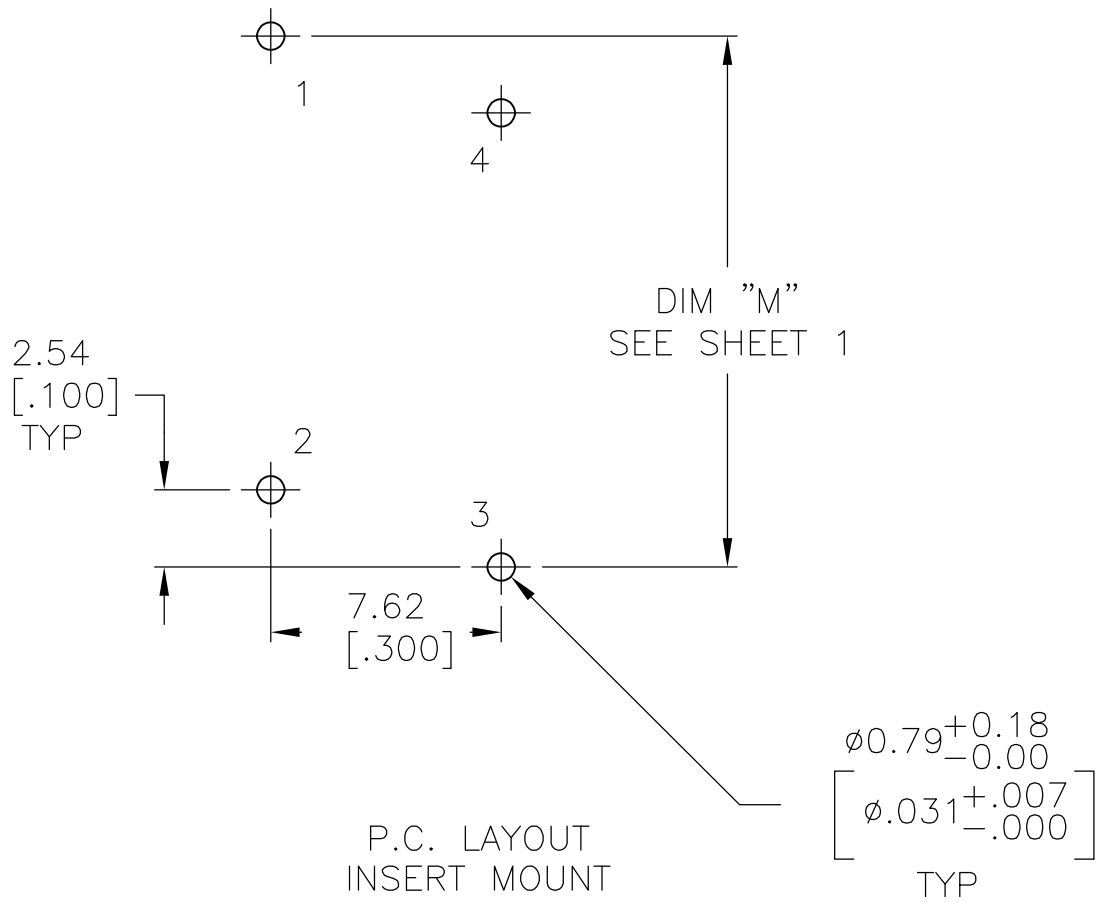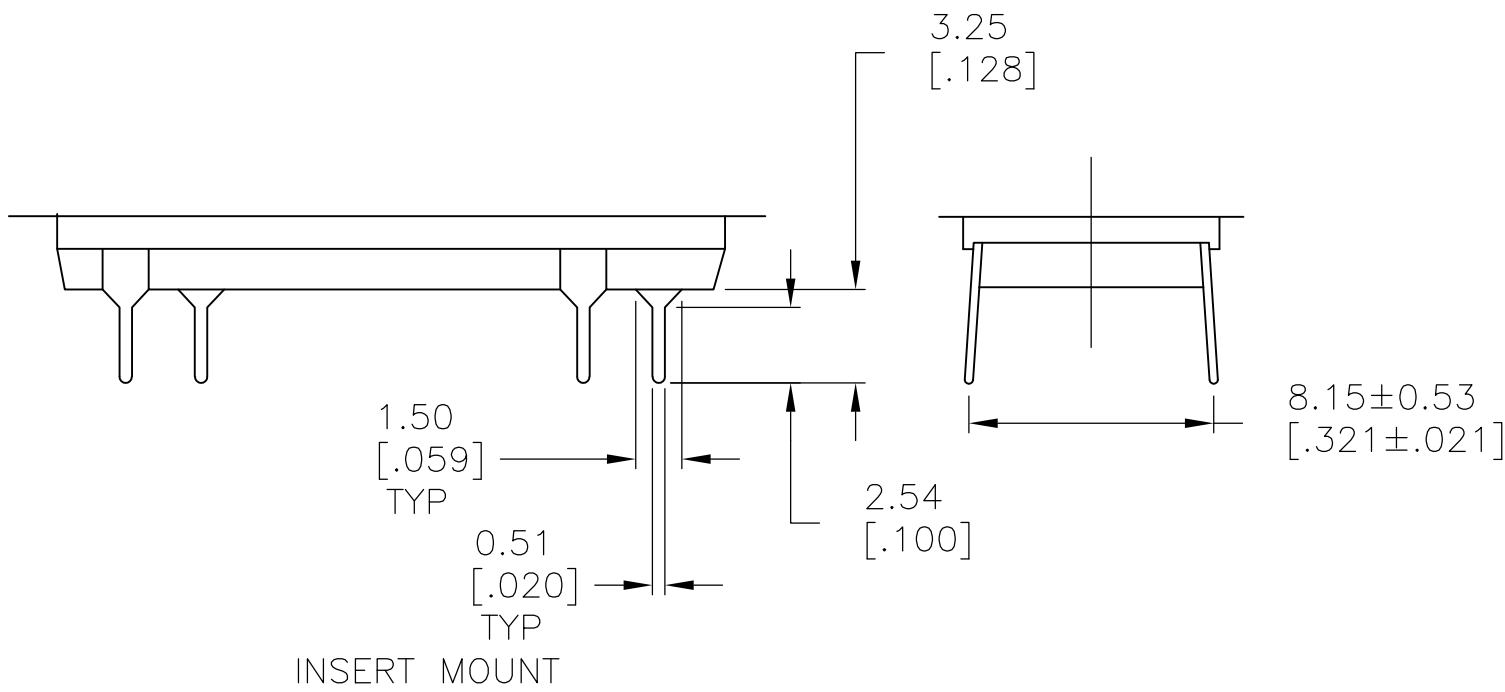

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	07AUG86	Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
		CHK	07JUL88			
DIMENSIONS: mm [INCHES]		APVD	—	NAME ATT SERIES DIP SWITCH		
		PRODUCT SPEC	—			
		APPLICATION SPEC	—	SIZE	CAGE CODE	DRAWING NO
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT	—	A2	00779	C=1825284
MATERIAL SEE SPECIFICATION		CUSTOMER DRAWING		SCALE	4:1	SHEET 2 OF 2
				REV		B1

1825284

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[ATT5600C](#) [ATT475C04](#)