

① MATERIAL, HOUSING, HIGH TEMPERATURE PLASTIC, UL94V-O, NAT.
CONTACT: COPPER ALLOY
LATCH: STAINLESS STEEL, TIN PLATING.

② FINISH; CONTACT AREA: 0.00025 MIN GOLD PLATING ON
0.001 MIN ALL OVER NICKEL
SOLDERING AREA: 0.00005 MIN TO 0.00030 MAX GOLD PLATING.


3. TOLERANCES NON-ACCUMULATIVE.

④ FINISH; CONTACT AREA: 0.00025 MIN GOLD PLATING ON
0.001 MIN ALL OVER NICKEL
SOLDERING AREA: BRIGHT TIN LEAD PLATING.



⑤ PACKAGED 12 PIECES PER HARD TRAY.

⑥ PART PACKED PER EIA IS-704 STANDARD. REEL DIAMETER SHALL
BE 330mm. TAPE WIDTH SHALL BE 88mm AND TAPE PITCH SHALL
BE 36mm.

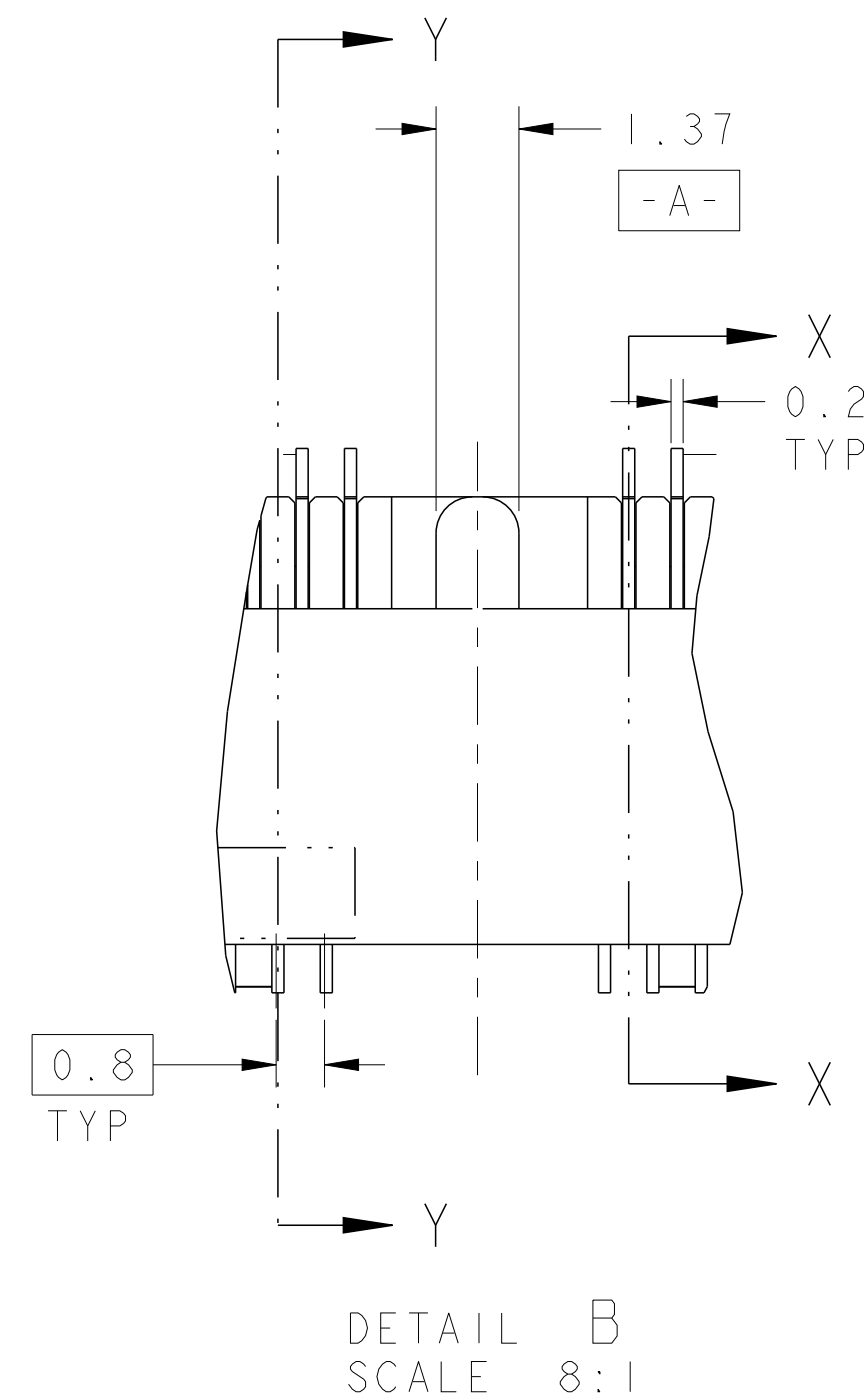
⑦ DATE CODE (4-DIGITS), LOCATED AS SHOWN.
TO BE INTERPRETED AS FOLLOWS:
DIGIT # 1 - LAST DIGIT OF YEAR.
DIGITS # 2 AND # 3 - CALENDAR WEEK.
DIGIT # 4 - DAY OF THE WEEK (WITH SUNDAYS AS DAY 1).



NIL	AVAILABLE	2	DRAM 3.3V	144	6-390114-1 6
NIL	AVAILABLE	2	DRAM 3.3V	144	3-390114-1 5
390114-1	NOT AVAILABLE	4	DRAM 3.3V	144	390114-4
NIL	AVAILABLE	2	DRAM 3.3V	144	390114-1
SUPERSEDED BY	REMARKS	FINISH	POWER SUPPLY	POS	PART NUMBER

DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		DWN W. SORAH 6-20-91 CHK B. TALLEY 6-20-91 APPV SF LEONG		 TE Connectivity	
mm		0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 4 PLC ± ANGLES ± FINISH *		NAME S.O. DIMM SOCKET ASSEMBLY, 0.8 mm, 3.3V 144 POSITION, LOW PROFILE FOR SDRAM TYPE MODULE		SIZE CASE CODE DRAWING NO. RESTRICTED TO A 00779 C-390114 -	
MATERIAL 		SEE TABLE		WEIGHT - CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 2 REV K1	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DY	-		-	SEE SHEET 1	-	-	-

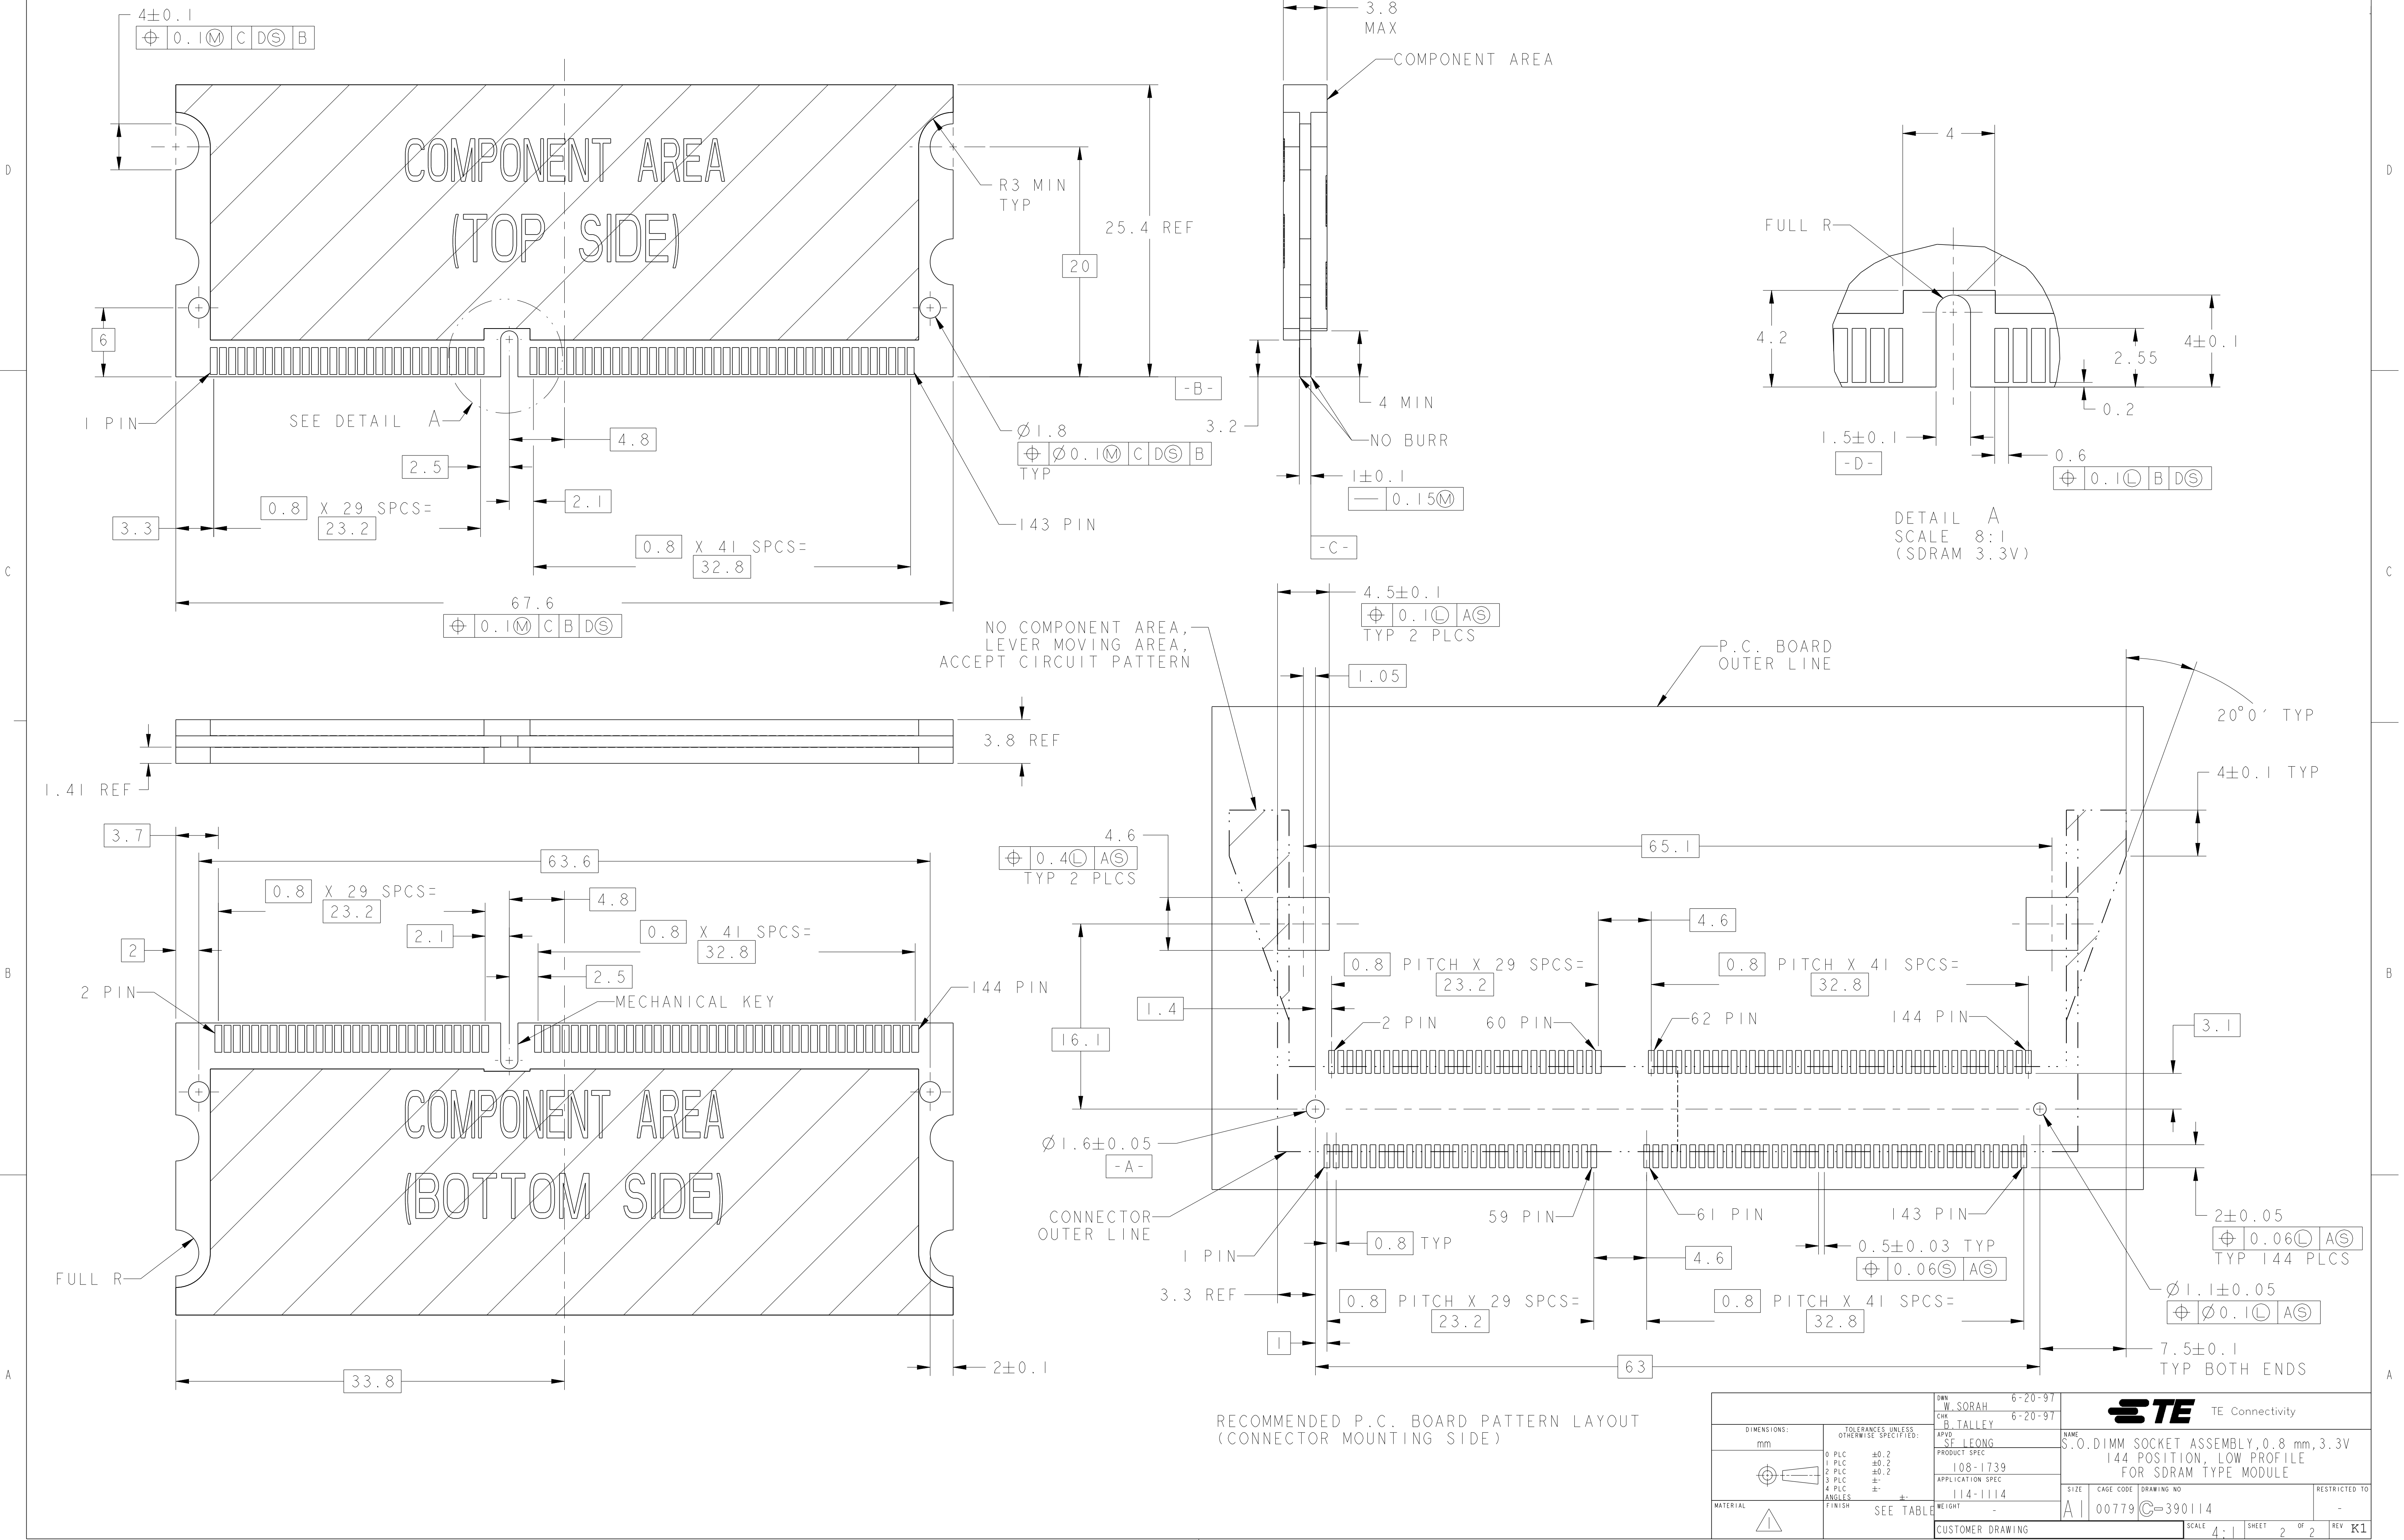

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-390114-1](#)