

Sales Outline Drawing

Revision

A


Specifications:

Oscillation Frequency (Hz)	2700
Operating Voltage (Vp-p)	3 ~ 7.0
Rated Voltage (Vp-p)	5.0
Current Consumption Max. (mA)	80 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance (Ω)	25 \pm 4
Operating Temperature ($^{\circ}$ C)	-30 ~ +70
Storage Temperature ($^{\circ}$ C)	-40 ~ +80
Lead Pin	Tin Plated Brass
Housing	PPO plastic resin (Color: Black)
Weight (Grams)	0.8
Condition by wave soldering ($^{\circ}$ C)	245 \pm 5 / 3 \pm 0.5 sec
Condition by hand soldering ($^{\circ}$ C)	350 \pm 20 / within 5 sec
Options	For other options contact factory



PS: Vp-p = 1/2duty, square wave

RoHS Compliant

Dimensions: (units: mm)

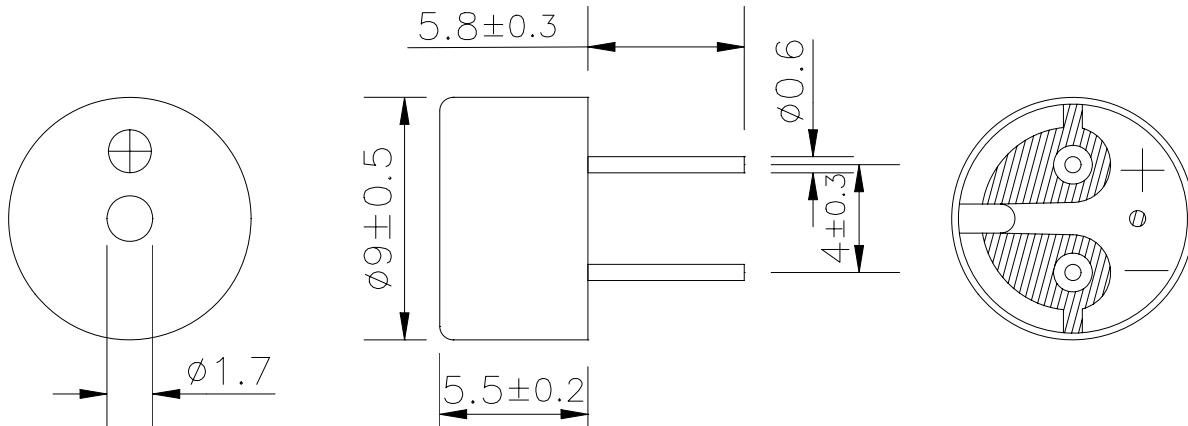

Recommended Driving Circuit:



The base current I_b should be high enough so that it saturates the collector current of the transistor with the CB load.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[PB-0927PD1AQ](#)