



SHELL	A ± 0.38	B ± 0.12	C ± 0.10	D ± 0.25	E ± 0.07	G ± 0.25
09	30.81	24.99	16.96	16.79	10.96	5.90
15	39.14	33.32	25.18	25.12	19.18	5.90
25	53.03	47.04	39.12	38.84	33.12	5.70
37	69.32	63.50	55.68	55.30	49.68	5.70

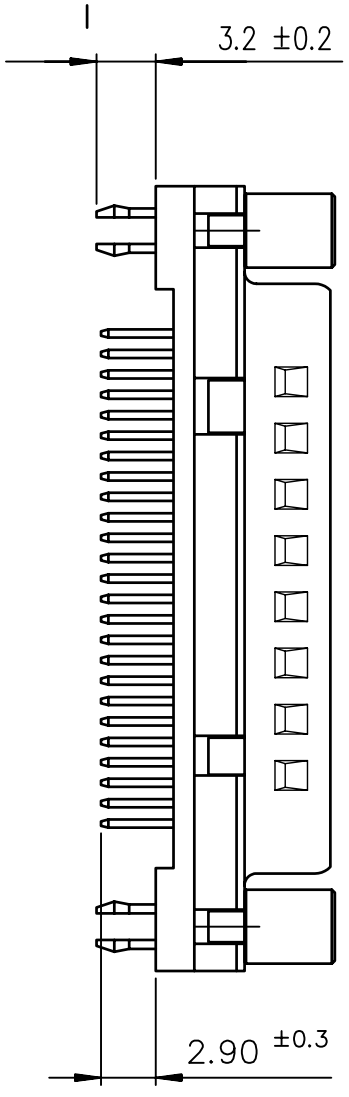

SHELL	LEAD FREE PART NUMBER	TIN LEAD PART NUMBER	DESIGNATIONS
09	D09P24A6GV00LF	D09P24A6GV00	HEADER 9 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
15	D15P24A6GV00LF	D15P24A6GV00	HEADER 15 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
25	D25P24A6GV00LF	D25P24A6GV00	HEADER 25 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
37	D37P24A6GV00LF	D37P24A6GV00	HEADER 37 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.

4 = Performance level PL3 ≥ 200 OPERATIONS  
 6 = Performance level PL1 ≥ 500 OPERATIONS

PC card drilling dimensions(after plating)  
 (thickness 1.60±0.20mm)

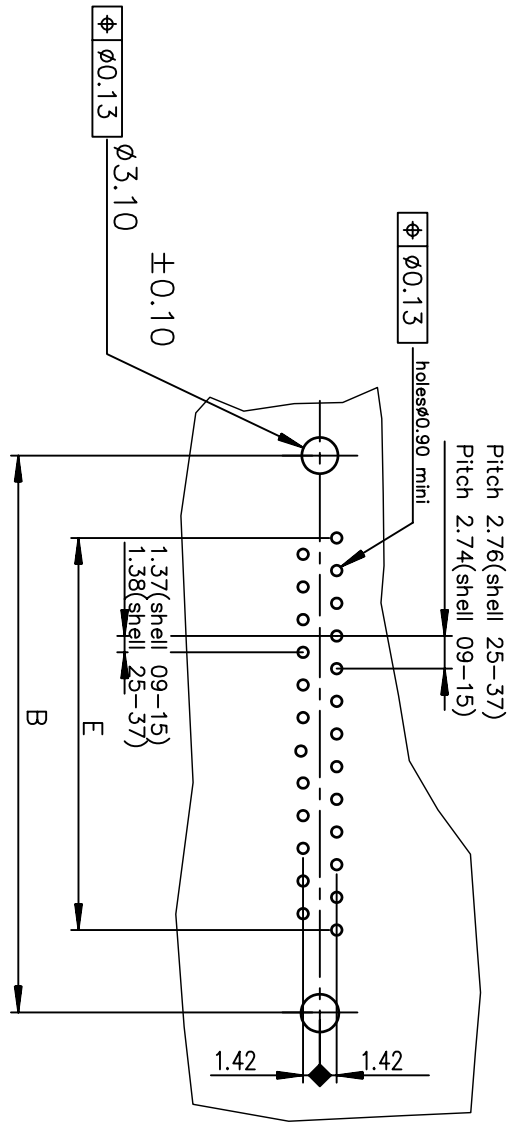

4 = Performance level PL3 ≥ 200 OPERATIONS  
 6 = Performance level PL1 ≥ 500 OPERATIONS

SHELL	LEAD FREE PART NUMBER	TIN LEAD PART NUMBER	DESIGNATIONS
09	D09P24A*GI00LF	D09P24A*GI00	HEADER 9 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
15	D15P24A*GI00LF	D15P24A*GI00	HEADER 15 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
25	D25P24A*GI00LF	D25P24A*GI00	HEADER 25 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.
37	D37P24A*GI00LF	D37P24A*GI00	HEADER 37 CTS STRAIGHT-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK -ELEC.CONTIN.

I = SCREWLOCK Threaded M3

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
 SEE DRAWING C01-8646-0000

www.fciconnect.com

Dr	JARRY	1995/08/11	ANGULAR	0.X	±0.1	size	A3	ECN	110-0059
Eng	PESSON	1995/08/11	LINEAR	0.XX	±0.1				
Chr	NIRMAL GEORGE	2010-02-23	0.XX	±2					
Appr	SUDHIR VARMA	2010-02-23	Product family			D-SUB			

		HEADER DELTA D STD EUROPE HEADER DELTA D STD EUROPE		C01-8646-0816 CUSTOMER	
www.fciconnect.com		tolerance std ISO 1302 ✓ ISO 406 ISO 1101		projection 	
TOLERANCES UNLESS OTHERWISE SPECIFIED		size A3		sheet 1 of 1	