

## Silicon Power Schottky Diode


$$V_{RRM} = 20 \text{ V} - 40 \text{ V}$$

$$I_{F(AV)} = 200 \text{ A}$$

### Features

- High Surge Capability
- Types from 20 V to 40 V  $V_{RRM}$
- Isolation Type Package
- Electrically Isolated Base Plate
- Not ESD Sensitive

### Three Tower Package

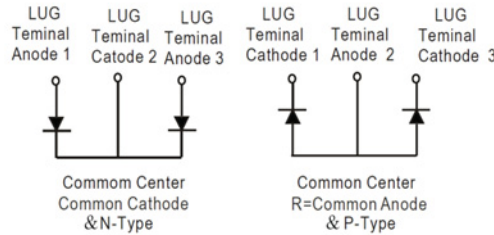

Maximum ratings, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified ("R" devices have leads reversed)

| Parameter                       | Symbol    | Conditions | MBRT20020(R) | MBRT20030(R) | MBRT20035(R) | MBRT20040(R) | Unit             |
|---------------------------------|-----------|------------|--------------|--------------|--------------|--------------|------------------|
| Repetitive peak reverse voltage | $V_{RRM}$ |            | 20           | 30           | 35           | 40           | V                |
| RMS reverse voltage             | $V_{RMS}$ |            | 14           | 21           | 25           | 28           | V                |
| DC blocking voltage             | $V_{DC}$  |            | 20           | 30           | 35           | 40           | V                |
| Operating temperature           | $T_j$     |            | -55 to 150   | -55 to 150   | -55 to 150   | -55 to 150   | $^\circ\text{C}$ |
| Storage temperature             | $T_{stg}$ |            | -55 to 150   | -55 to 150   | -55 to 150   | -55 to 150   | $^\circ\text{C}$ |

Electrical characteristics, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                                    | Symbol      | Conditions                                          | MBRT20020(R) | MBRT20030(R) | MBRT20035(R) | MBRT20040(R) | Unit |
|------------------------------------------------------------------------------|-------------|-----------------------------------------------------|--------------|--------------|--------------|--------------|------|
| Average forward current (per pkg)                                            | $I_{F(AV)}$ | $T_C = 125^\circ\text{C}$                           | 200          | 200          | 200          | 200          | A    |
| Peak forward surge current (per leg)                                         | $I_{FSM}$   | $t_p = 8.3 \text{ ms}$ , half sine                  | 1500         | 1500         | 1500         | 1500         | A    |
| Maximum instantaneous forward voltage (per leg)                              | $V_F$       | $I_{FM} = 100 \text{ A}$ , $T_j = 25^\circ\text{C}$ | 0.70         | 0.70         | 0.70         | 0.70         | V    |
| Maximum instantaneous reverse current at rated DC blocking voltage (per leg) | $I_R$       | $T_j = 25^\circ\text{C}$                            | 1            | 1            | 1            | 1            | mA   |
|                                                                              |             | $T_j = 100^\circ\text{C}$                           | 10           | 10           | 10           | 10           |      |
|                                                                              |             | $T_j = 150^\circ\text{C}$                           | 30           | 30           | 30           | 30           |      |

### Thermal characteristics

|                                             |                 |  |      |      |      |      |                    |
|---------------------------------------------|-----------------|--|------|------|------|------|--------------------|
| Thermal resistance, junction-case (per leg) | $R_{\theta JC}$ |  | 0.45 | 0.45 | 0.45 | 0.45 | $^\circ\text{C/W}$ |
|---------------------------------------------|-----------------|--|------|------|------|------|--------------------|

Figure.1-Typical Forward Characteristics

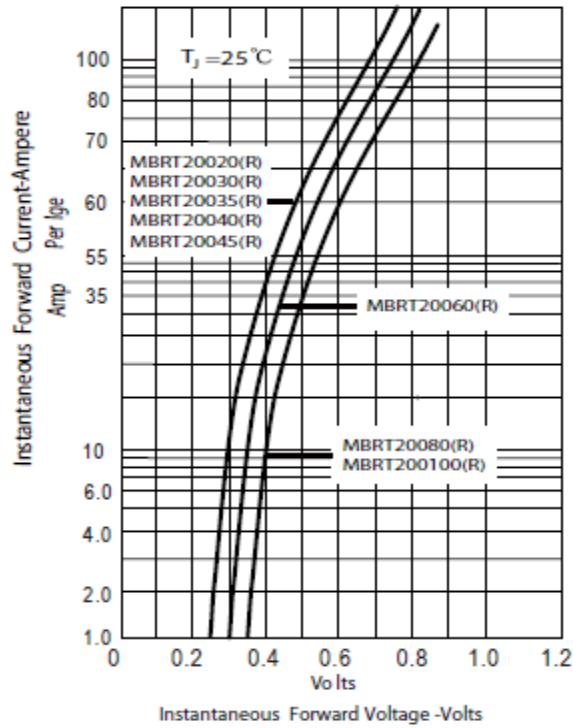


Figure.2-Forward Derating Curve

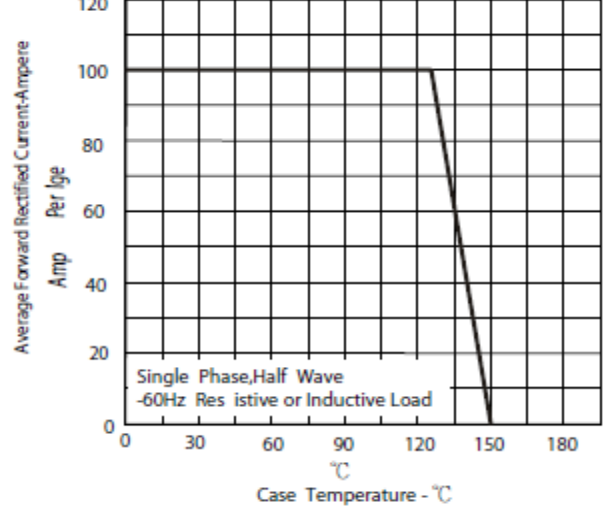


Figure.3-Peak Forward Surge Current





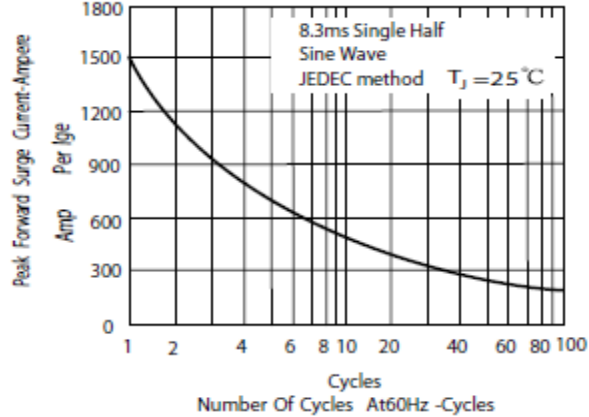


Figure.4-Typical Reverse Characteristics

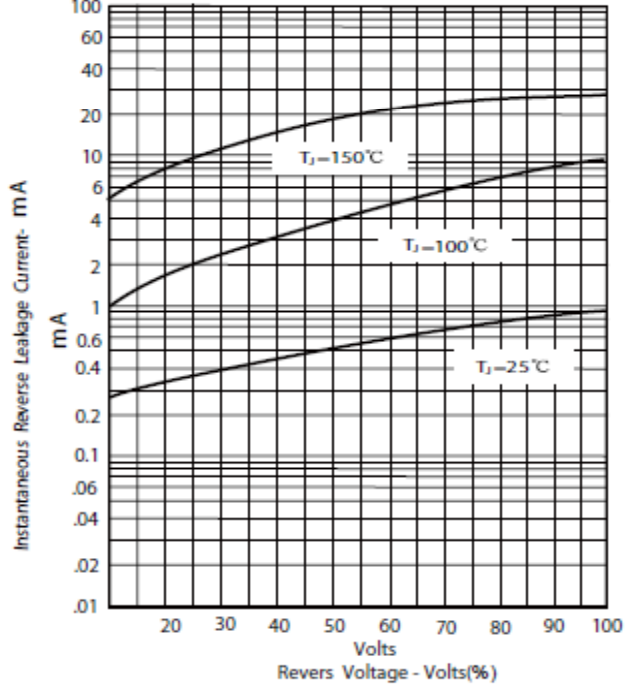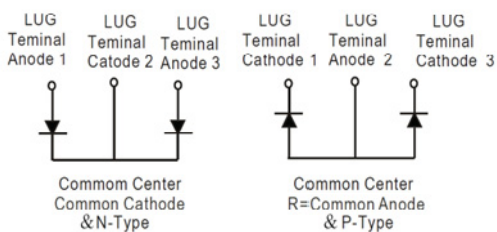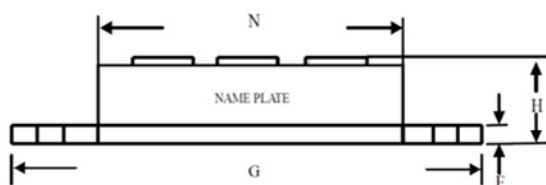

## Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

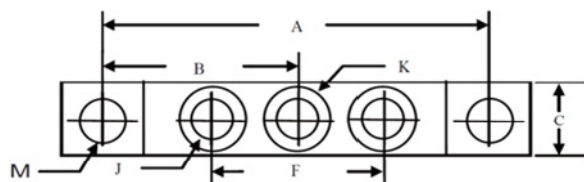

| DIM | Inches          |       | Millimeters |       |
|-----|-----------------|-------|-------------|-------|
|     | Min             | Max   | Min         | Max   |
| A   | 3.150           | NOM   | 80.01       | NOM   |
| B   | 1.565           | 1.585 | 39.75       | 40.26 |
| C   | .700            | .800  | 17.78       | 20.32 |
| E   | .119            | .132  | 3.02        | 3.35  |
| F   | 1.327           | REF   | 33.72       | REF   |
| G   | 3.55            | 3.65  | 90.17       | 92.71 |
| H   | ----            | .73   | ----        | 18.30 |
| J   | 1/4-20 UNC FULL |       |             |       |
| K   | .472            | .511  | 12          | 13    |
| M   | .275            | .295  | 6.99        | 7.49  |
| N   | 2.38            | 2.46  | 60.5        | 62.5  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GeneSiC Semiconductor:](#)

[MBRT20020](#) [MBRT20020R](#) [MBRT20030](#) [MBRT20030R](#) [MBRT20035](#) [MBRT20035R](#) [MBRT20040](#) [MBRT20040R](#)