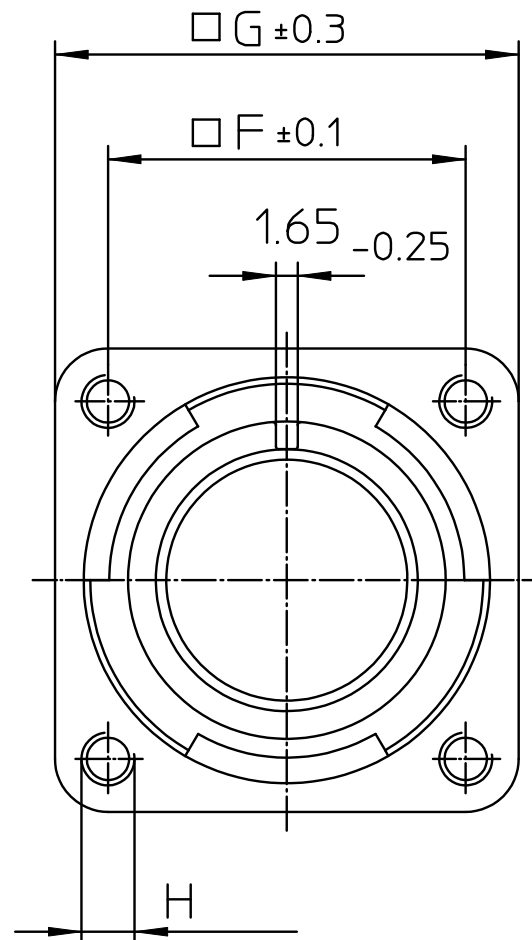
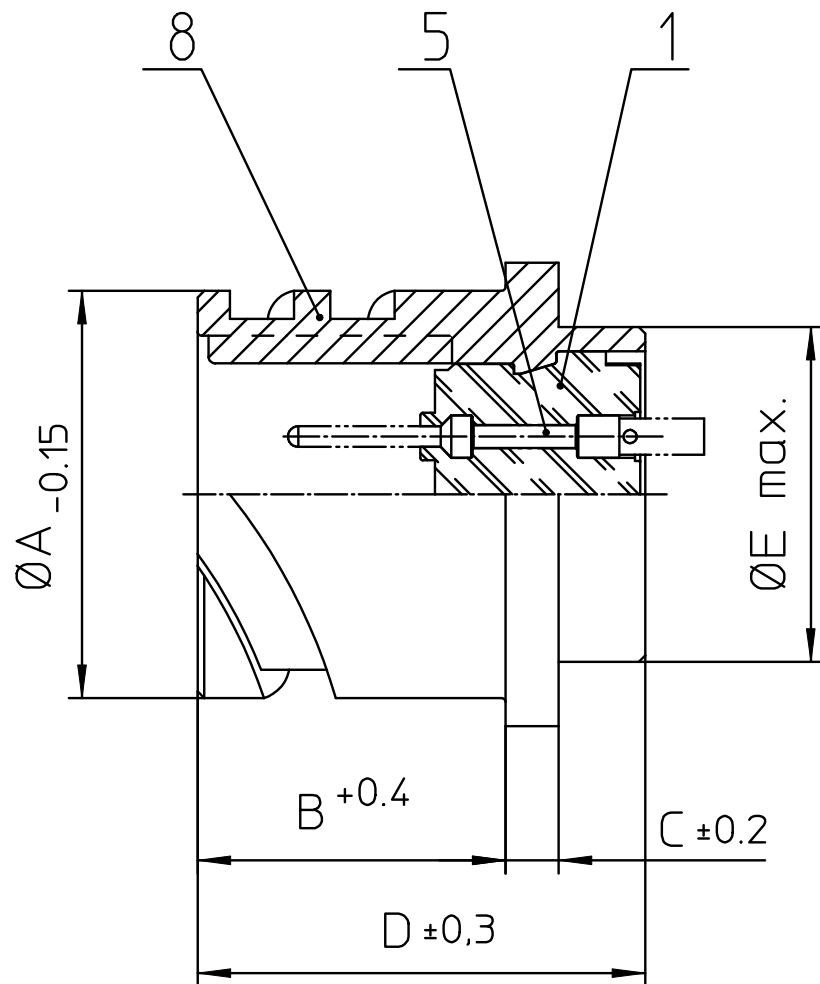


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 24.6              |
| B   | 18.2              |
| C   | 3.2               |
| D   | 24.7              |
| E   | 19.2              |
| F   | 23                |
| G   | 30                |
| H   | M4                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

**Material Specification:**

|                     |                                               |
|---------------------|-----------------------------------------------|
| Shell Material:     | Aluminium alloy                               |
| Shell Plating:      | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere                                 |
| Contact Material:   | Copper alloy                                  |
| Contact Plating:    | Hard silver                                   |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



**ITT**

*Engineered for life*

ITT CANNON GmbH  
D - 71384 Weinstadt/Germany

description CA3102E14S-1P-B-111  
Box mounting receptacle (rear mount, threaded holes)

Solder Cup / Pin / Layout: 14S-1

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 1840 30. Apr 20