


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION				, 19		LOC		DIST						REVISIONS															
© COPYRIGHT 19						BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.						G		14		P		F		ZONE		LTR		DESCRIPTION		DATE		APPD			
AMP PART NO		MATERIAL		PKG TYPE		QTY																		J		REV PER 0G3A-0328-02		07JUN02		JR MS	
8-36934-3		M/F 8-36934-0		BOX		25																									

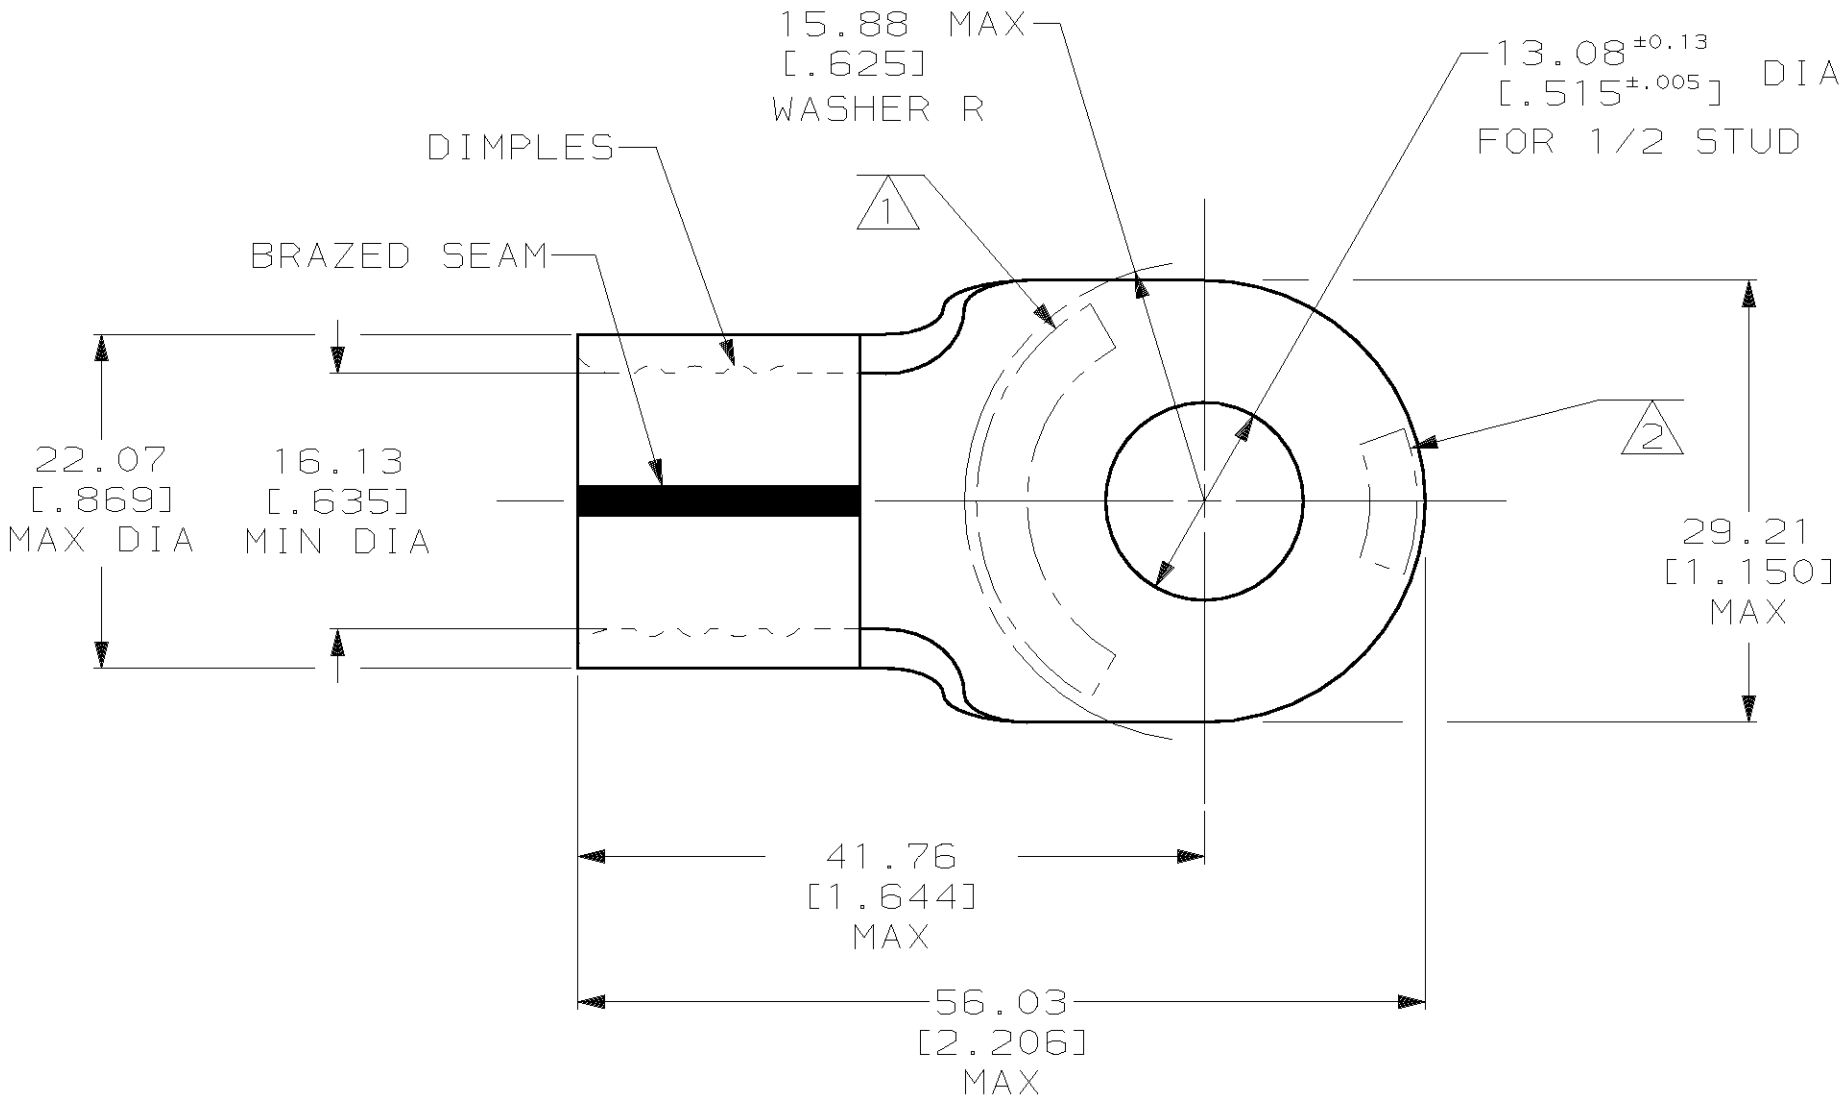

AMP WIRE RANGE	UL E13288 Listed
4/0 AWG SOLID OR STRANDED	4/0 AWG SOLID OR STRANDED
CS LR7189 Certified	MILITARY P/N AND CLASS
4/0 AWG SOLID OR STRANDED	NOT APPLICABLE

- 1 STAMP AMP 4/OW* APPROX AS SHOWN
- 2 STAMP 200 APPROX AS SHOWN
- 3 MATERIAL THK: 2.59^{±0.08} [.102^{±.003}]

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX					PART NO		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: NOT APPLICABLE	WIRE CROSS SECTIONAL AREA RANGE: 96.3-117.0mm² [190,000-231,100] CIR MILS SOLID OR STRANDED	DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -		DR 5/20/93 DK SCHRUM		 AMP Incorporated Harrisburg, PA 17105-3608	
					MATERIAL COPPER PER ASTM B-152 ANNEALED		CHK 1/27/94 RD HEIM			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111				FINISH TIN PLATE 0.00254[.000100] MIN THK PER ASTM B 545		APPD 1/27/94 RE ROSER APPD 1/27/94 JL MECKLEY		NAME TERMINAL, RING TONGUE, SOLISTRAND	
					PRODUCT SPEC -		APPLICATION SPEC -			
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.			WEIGHT -		SIZE 		CAGE CODE 00779	DRAWING NO C-36934
							SCALE 2:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36934](#)