

DO NOT SCALE
DIMENSIONS IN mm







METRIC

THIRD ANGLE
PROJECTION




NOTES:

- 1 FOR USE ON MINIATURE APPLICATORS (LEFT-RIGHT FEED)
- 2 PH. BRONZE ELONGATION A50 ≥ 20%.
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

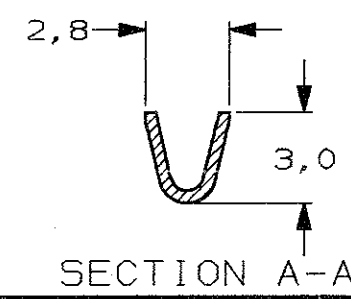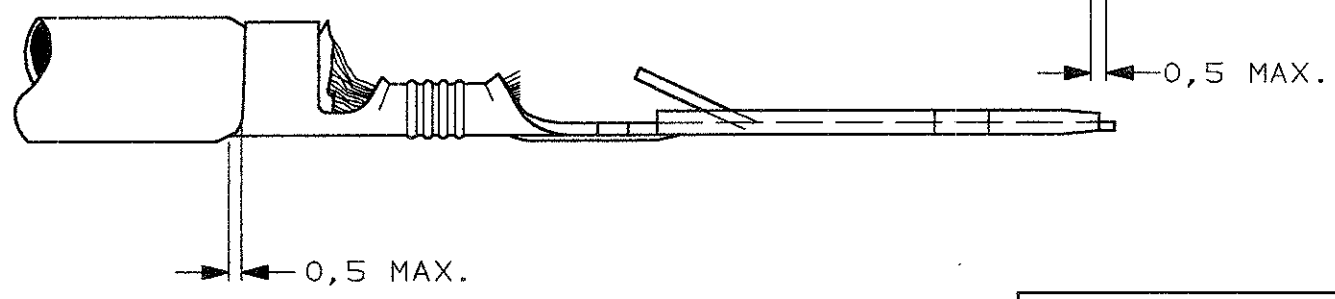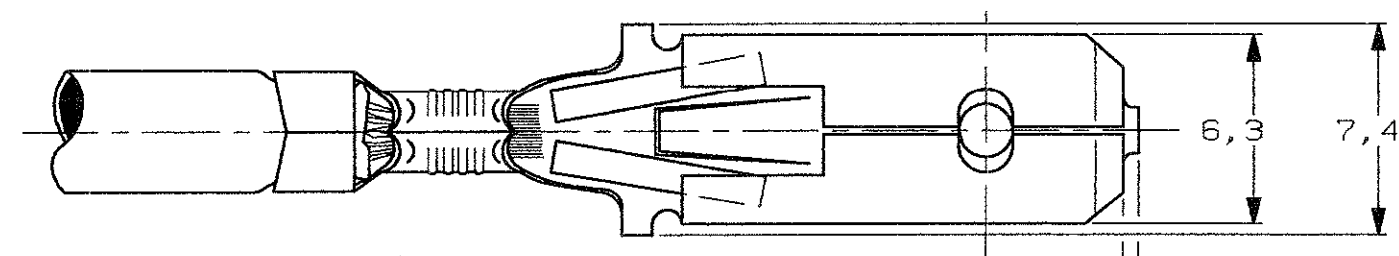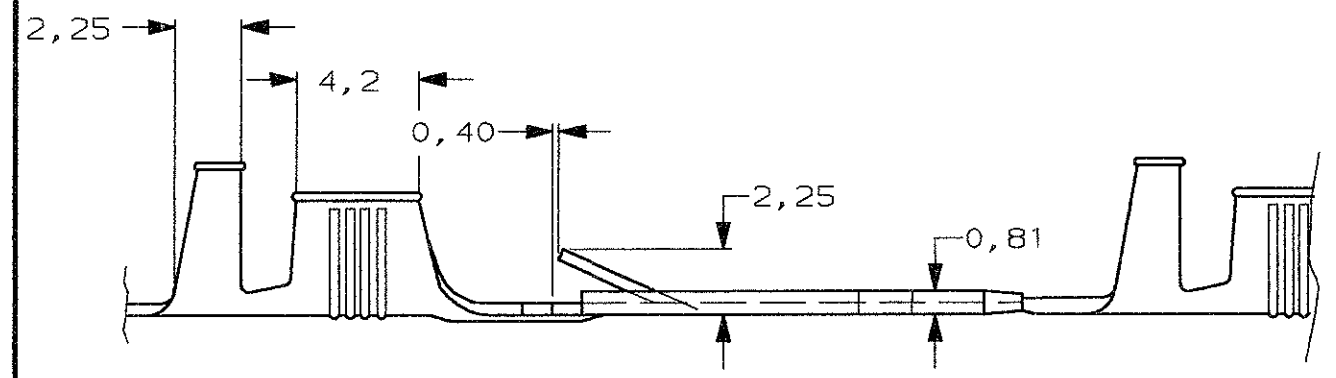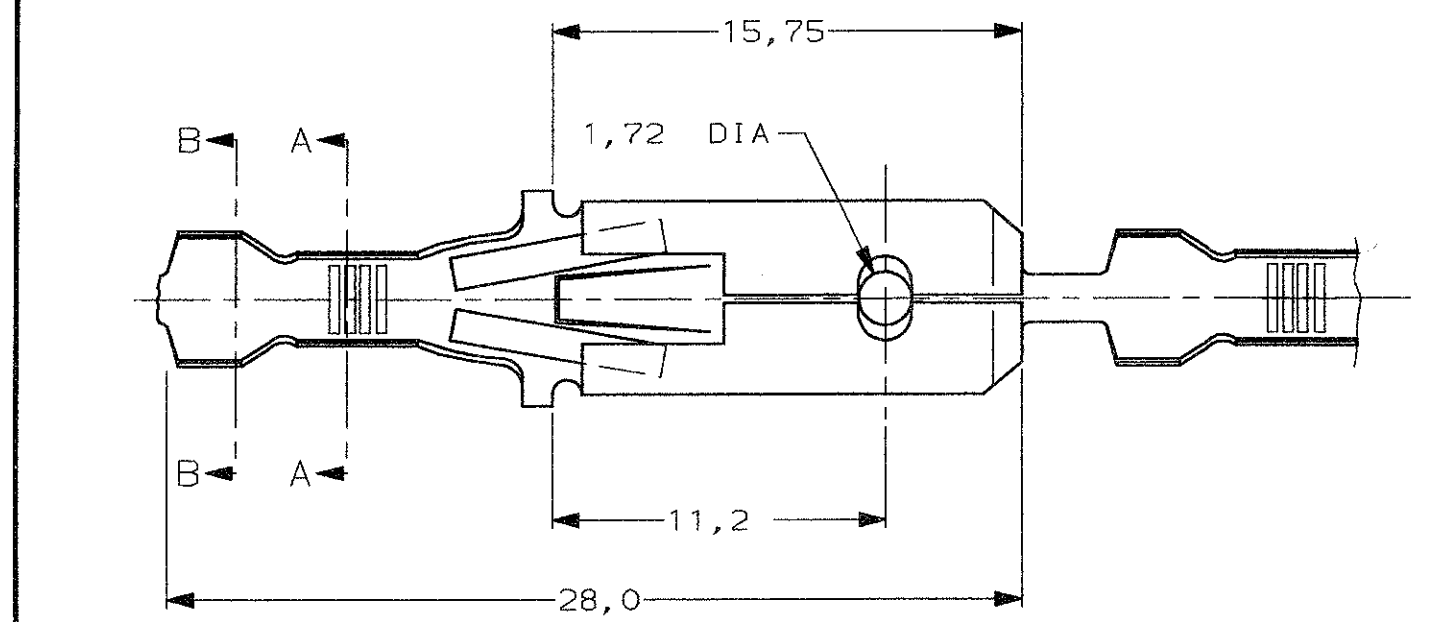

WIRE RANGE :
0,5-1,0 mm²
INSULATION RANGE :
1,4-2,3mm DIA.

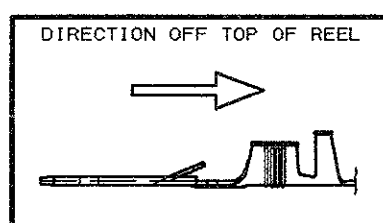

3	OBSOLETE	1	PRE-TINPLATED	BRASS	160859-8
		1	PRE-TINPLATED	Ph BRONZE	160859-7
		1	UNPLATED	Ph BRONZE	160859-6
		1	SILVERPLATED	Ph BRONZE	160859-5
		1	TINPLATED	Ph BRONZE	160859-4
		1	UNPLATED	Ph BRONZE	160859-3
		1	TINPLATED	BRASS	160859-2
		1	UNPLATED	BRASS	160859-1
		PLATING	PLATING	MATERIAL	PARTNUMBER

CUSTOMER DRAWING FOR REFERENCE ONLY
WILL NOT BE UPDATED

THIS DRAWING IS UNPUBLISHED
RELEASED FOR PUBLICATION - ,19 -



NAME
FASTIN-FASTON® Connector,
.250" sr. TAB CONTACT.

G3	REVISED PER ECO-11-005140	RK	HMR	31MAR11
LTR.	REVISION RECORD	DR.	CHK.	DATE
DR. : J.v.LIEMPT.	CHK. : A.BIJNEN.	APP. : L.v.SOEST.		
DATE : 23 MAR 1992	DATE : -	DATE : -		

DWG.No.	REV.LTR.	SHEET	
C-160859	G3	1 OF 1	A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[160859-5](#)