

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J			B	REVISED PER ECR-10-026244	25MAR2011	TT	TM

- △材料及び表面処理
- ・コンタクト：銅合金
ニッケル下地めっきに接触部金めっき(表参照)
タイン部すずめっき。
 - ・ハウジング：液晶ポリマー
 - ・タイン プレート：液晶ポリマー
 - ・シェル：鋼，ニッケルめっき
 - ・リテンション レグ：黄銅，すずめっき
 - ・ガイド ソケット：鋼，ニッケルめっき

2. かん合相手コネクター：X-5179139-X, X-5179140-X.
3. 製品規格：108-78233

△本寸法は点線内(左側4箇所，右側4箇所)に適用。

△△を除く箇所に適用。

6. ガイド ソケットの締め付け最大トルク値：49Nm(5kgf-cm)

△MATERIAL & FINISH

- ・CONTACT: COPPER ALLOY
Au PL. AT CONTACT AREA(SEE TABLE)
TIN PL. AT TINE OVER Ni PL.
- ・HOUSING: LIQUID CRYSTAL POLYMERS
- ・TINE PLATE: LIQUID CRYSTAL POLYMERS
- ・SHELL: STEEL, Ni PL.
- ・RETENTION LEG: BRASS, TIN PL.
- ・GUIDE SOCKET : STEEL, Ni PL.




2. CONNECTOR TO BE MATED : X-5179139-X, X-5179140-X.

3. PRODUCT SPECIFICATION: 108-78233


△APPLICABLE TO THE DOTTEP LINE SECTION.
(8 TOTAL, 4 ON THE LEFT, 4 ON THE RIGHT)

△EXCEPT NOTE△

6. GUIDE SOCKET ON TORQUE: 49Nm(5kgf-cm) MAX.

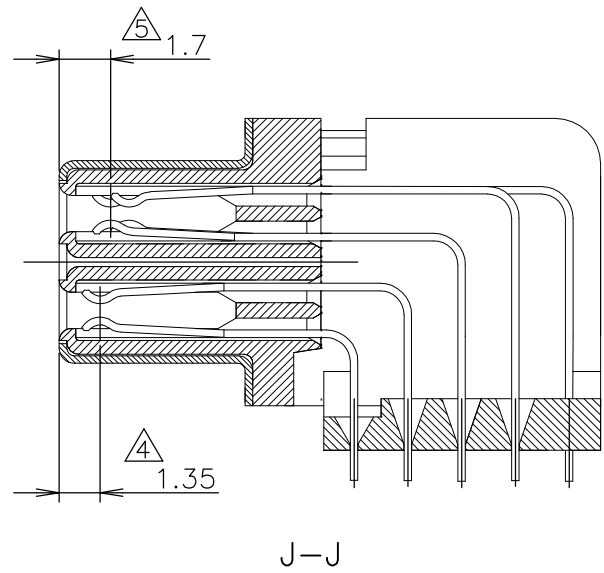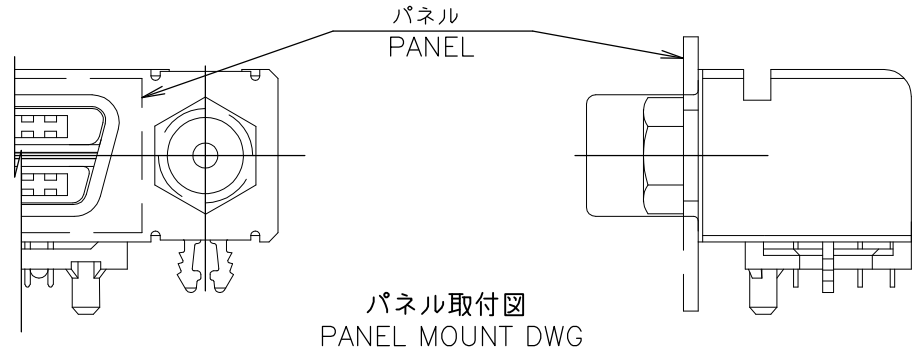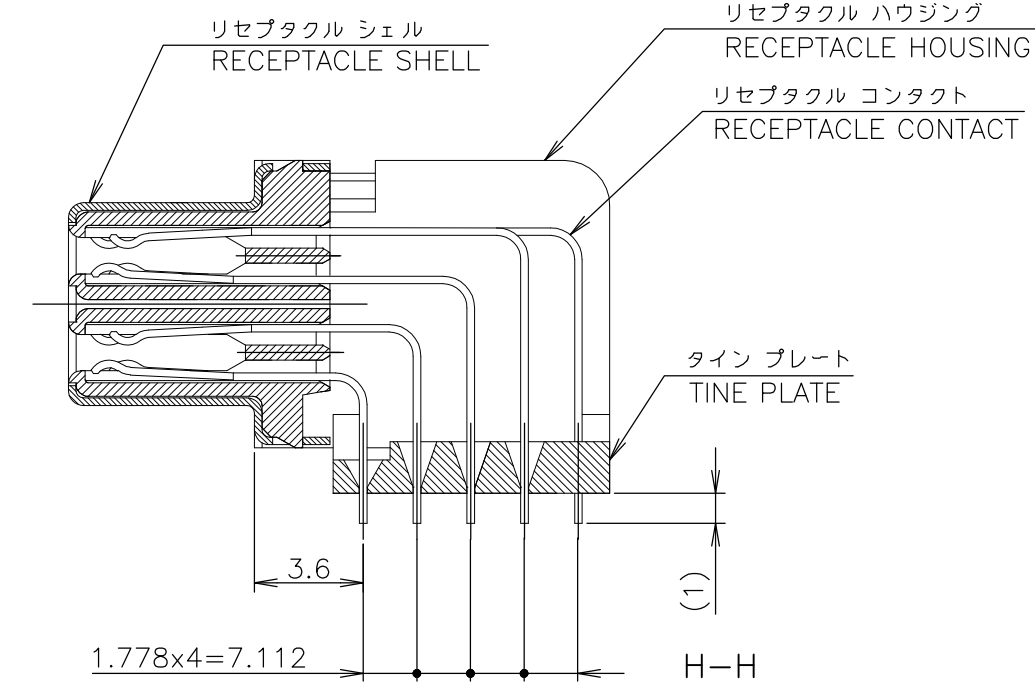

パターン禁止エリア
PATTERN PROHIBITION AREA

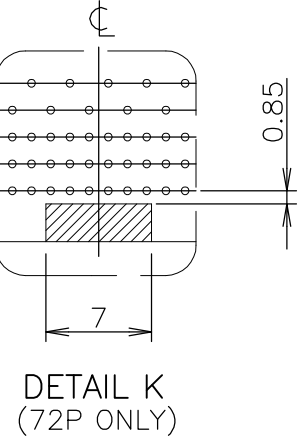

⑧ OBSOLETE												0.76 μ	4-5179135-4
	27.50	59.60	74.60	57.10	66.60	53.43	49.53	39	160P	0.2 μ			5179135-4
		31.66	46.66	29.16	38.66	25.49	21.59	17	72P	0.2 μ			5179135-1
	G	F	E	D	C	B	A	n	POS.	Aμ			P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN A.KUBO 20APR05	TE Connectivity			
DIMENSIONS: 単位： 耗 mm				CHK Y.YAMAMOTO 20APR05				
TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差				APVD Y.YAMAMOTO 20APR05	NAME 名称			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±				PRODUCT SPEC 製品規格	AMP DOCKING CONNECTOR REC ASSY KIT (HORIZONTAL TYPE)			
FINISH 仕上				APPLICATION SPEC 取付適用規格				
GENERAL TOLERANCE 一般公差				WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C=5179135	RESTRICTED TO 番号
10 ≥ : ±0.2 30 ≥ > 10: ±0.25 100 ≥ > 30: ±0.3 ANGLES: ±3°				CUSTOMER DRAWING	SCALE 尺度 2:1	SHEET 1 of 1	REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5179135-1](#)