



LOC		DIST		REVISIONS					
FX		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				D		REVISED PER ECO-09-011983	19MAY2009	DLD	WTW


KEYING OPTIONS
SCALE 2:1

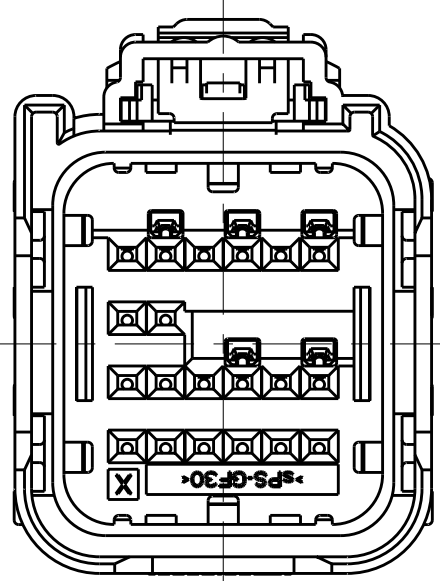


OPTION "A"

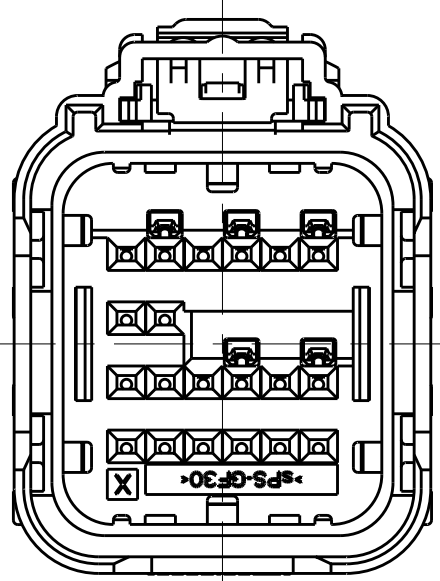


OPTION "B"

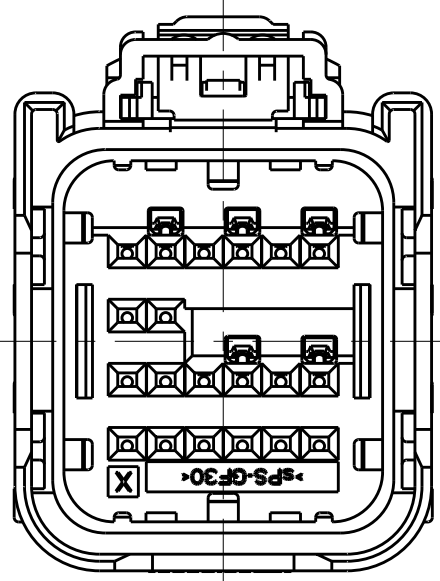


OPTION "C"

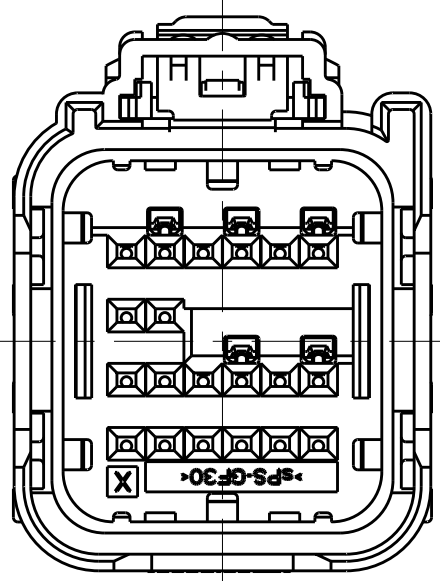



OPTION "D"

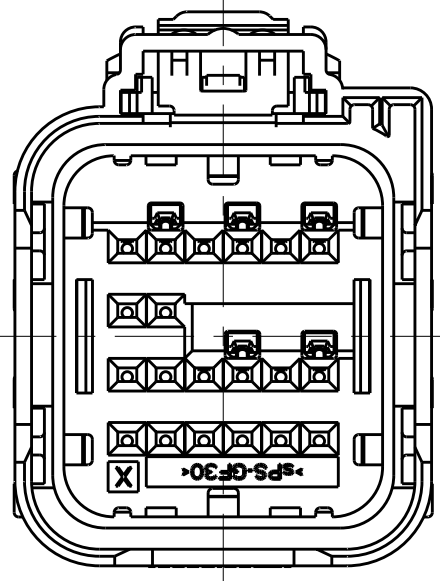

OPTION "E"

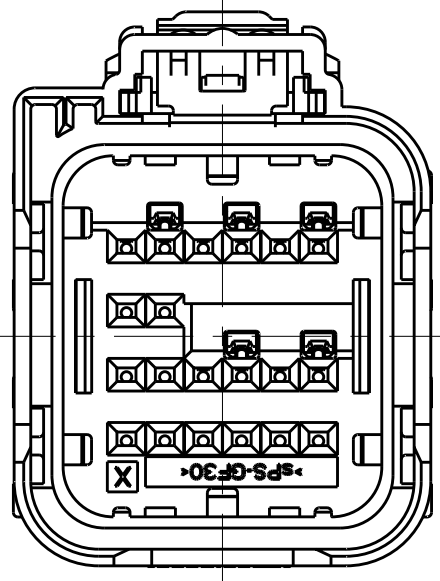



OPTION "F"

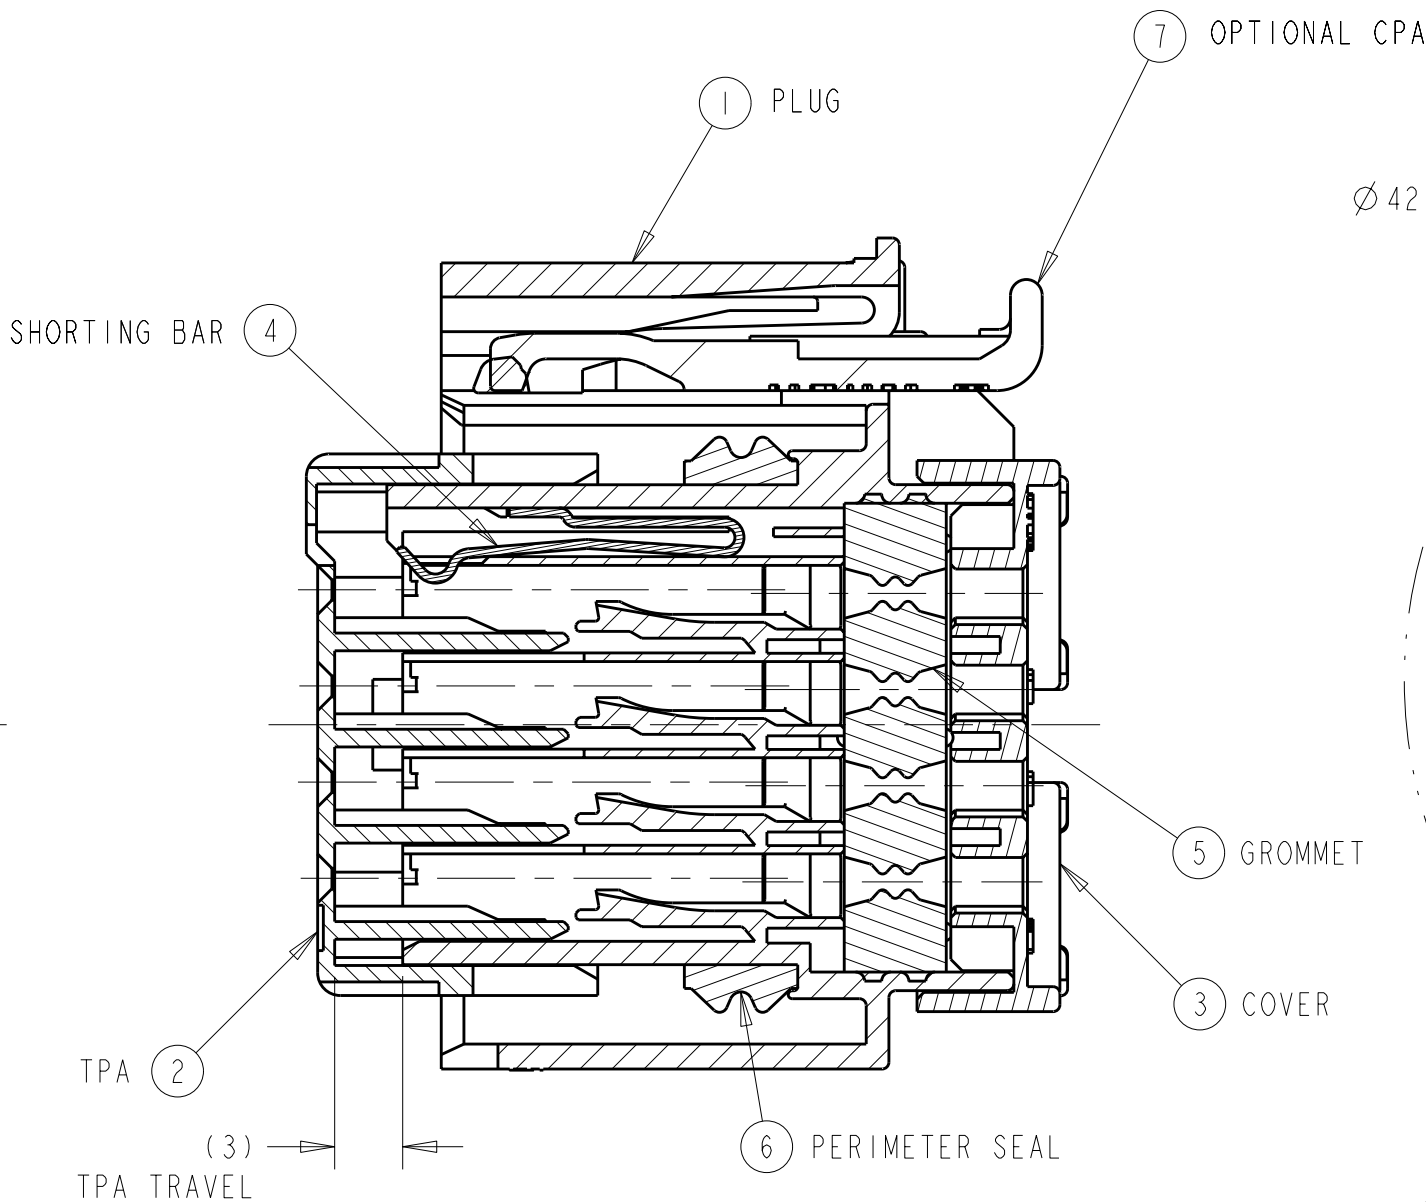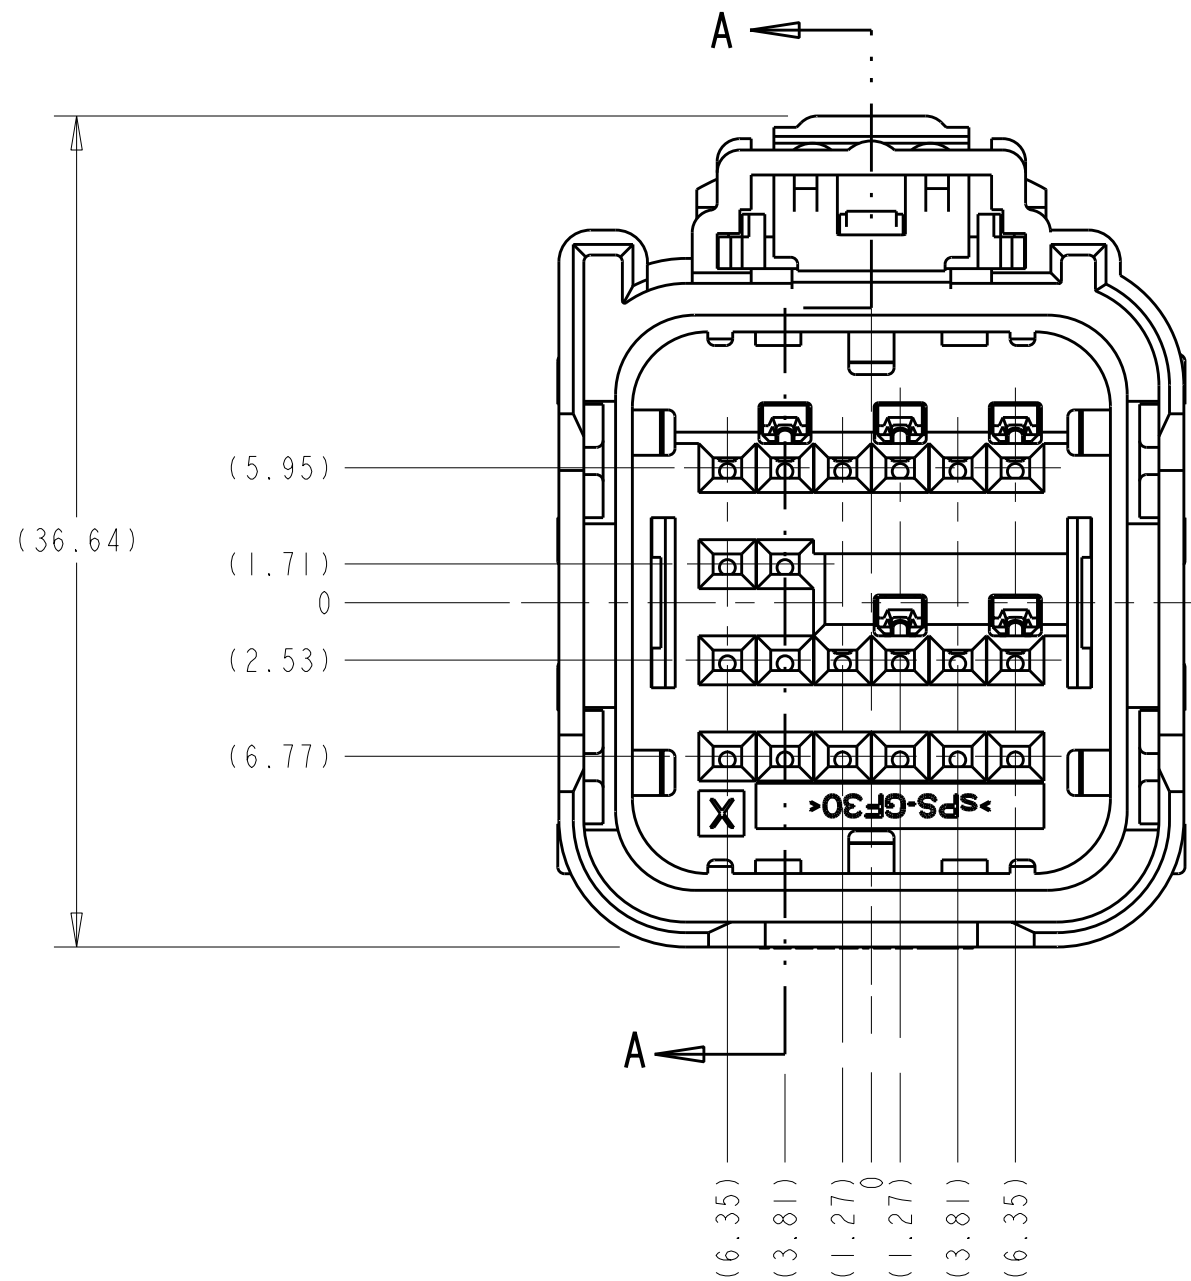


SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

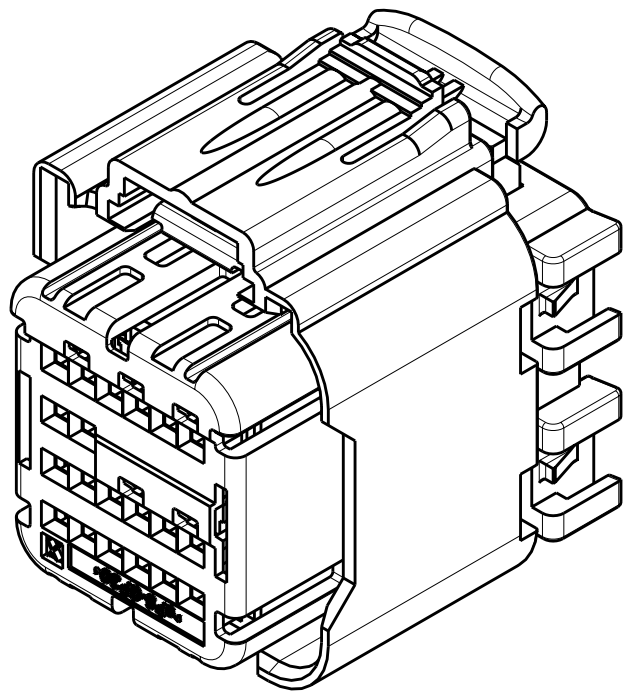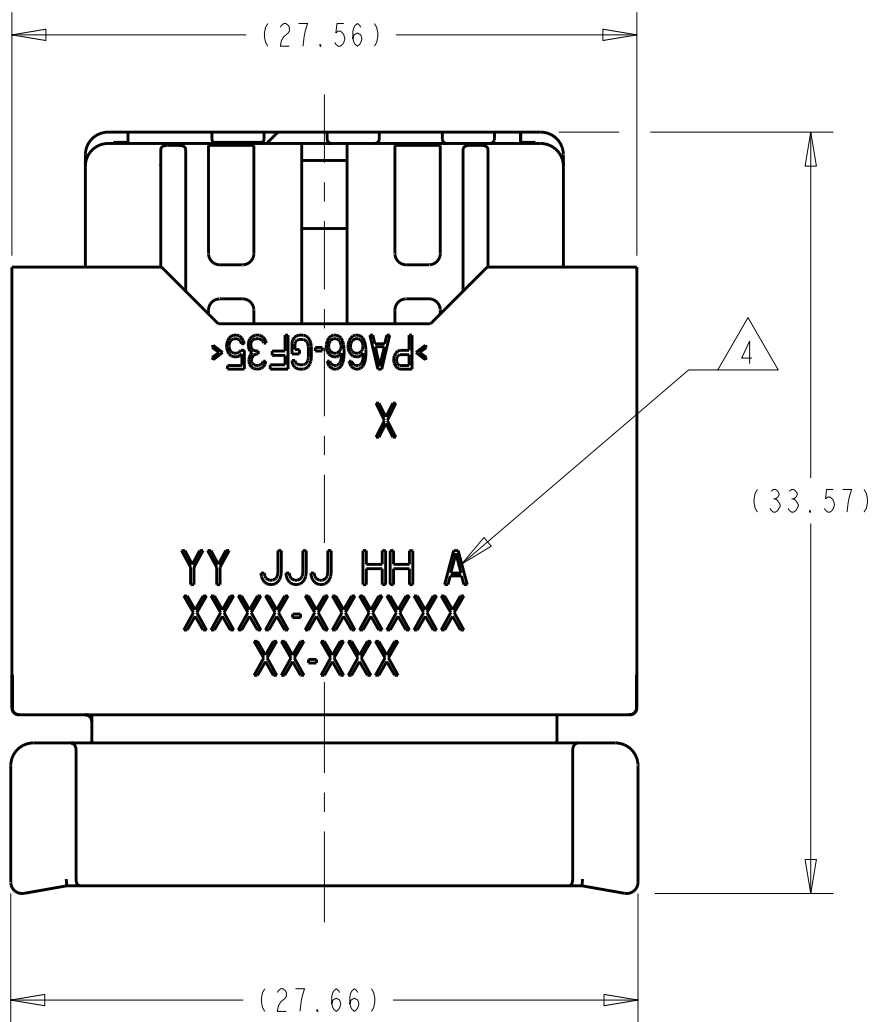

SCALE 2:1

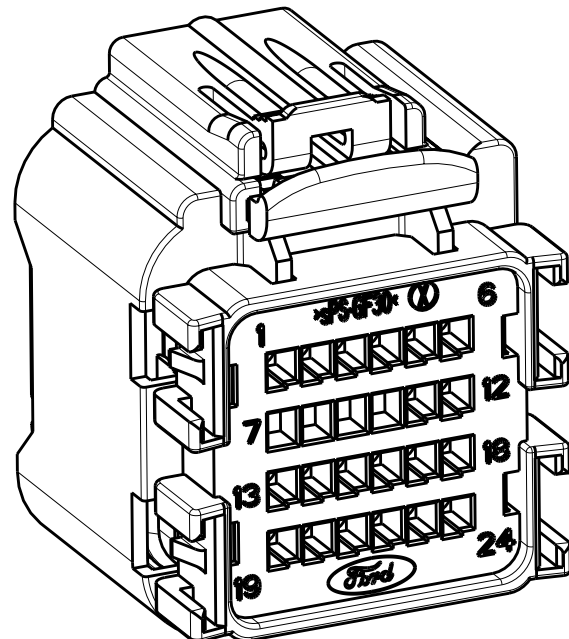

SCALE 2:1

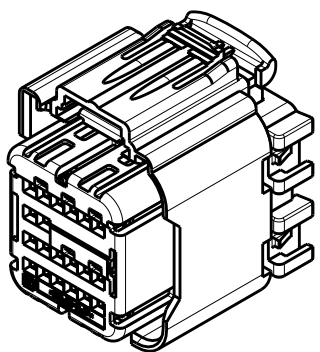

SCALE 1:1

KEYING OPTION "A" SHOWN

		SCALE 1:1		KEYING OPTION "A" SHOWN			
				CPA	PBT-GF15	RED	
				PERIMETER SEAL	SILICONE	GREEN	
				GROMMET	SILICONE	BROWN	
				SHORTING BAR	S.S.	SEE COMPONENT DRAWING	
				COVER	PA66 35% GF	BLACK	
				SPACER FOR SHORTING BAR APPLICATIONS	sPS 30% GF	NATURAL	
				PLUG WITH KEYING OPTION "D" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK	
				PLUG WITH KEYING OPTION "C" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK	
				PLUG WITH KEYING OPTION "B" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK	
				PLUG WITH KEYING OPTION "A" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK	
				ITEM	DESCRIPTION	MATERIAL	FINISH/COLOR

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1924670-4](#)