




| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|-----------|-----|------|
| AD | 00 | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | K3 | | REVISED PER ECO-15-006165 | 24JUL2015 | NK | MM |

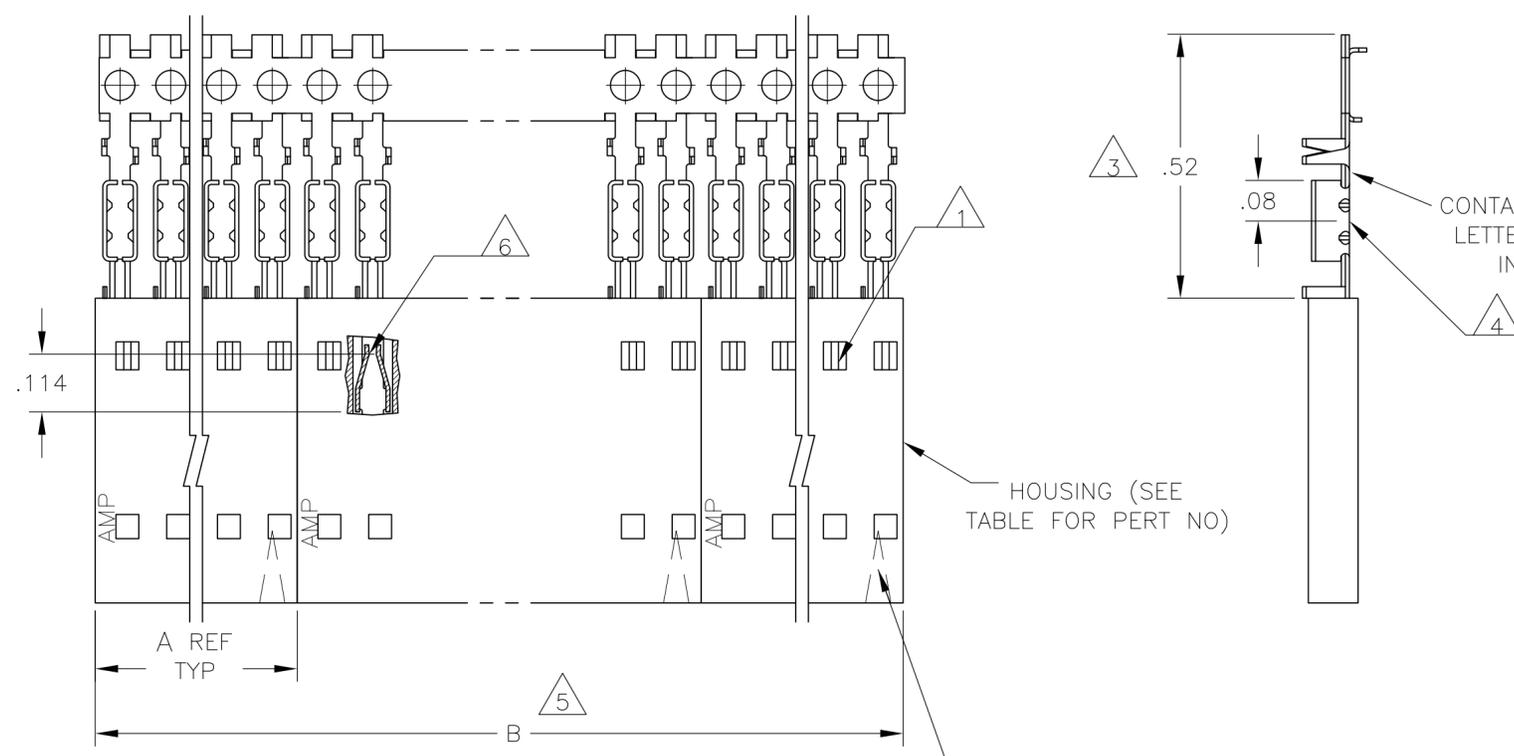

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 8 CONTACTS:.000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 CONTACTS:.000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

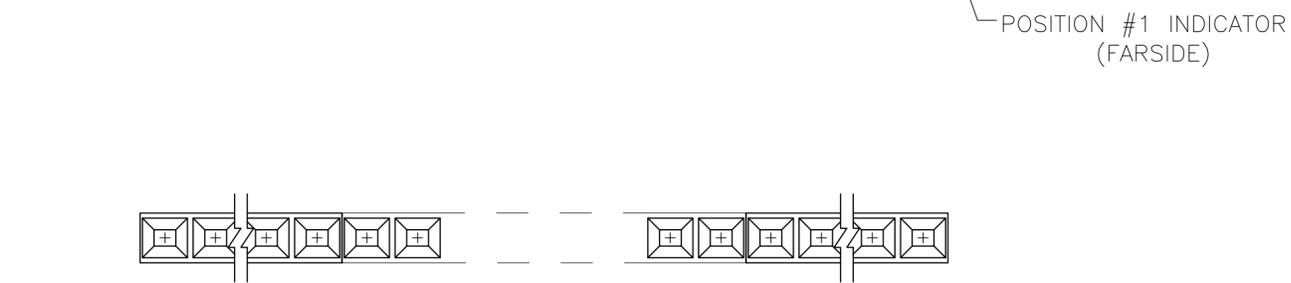

| | | | | | | | |
|-------------|---|----|------|-------|---------------------|------------|-------------------------------|
| | 9 | 2 | 2.40 | 1.198 | 1-103688-1 | 12 | 6-104439-1 |
| 10 OBSOLETE | 9 | 2 | 2.20 | 1.098 | 1-103688-0 | 11 | 6-104439-0 |
| | 9 | 2 | 2.00 | .998 | 103688-9 | 10 | 5-104439-9 |
| 10 OBSOLETE | 9 | 2 | 1.80 | .898 | 103688-8 | 9 | 5-104439-8 |
| | 9 | 2 | 1.60 | .798 | 103688-7 | 8 | 5-104439-7 |
| | 9 | 2 | 1.40 | .698 | 103688-6 | 7 | 5-104439-6 |
| | 9 | 4 | 2.39 | .598 | 103688-5 | 6 | 5-104439-5 |
| | 9 | 4 | 1.99 | .498 | 103688-4 | 5 | 5-104439-4 |
| | 9 | 5 | 1.99 | .398 | 103688-3 | 4 | 5-104439-3 |
| | 9 | 5 | 1.49 | .298 | 103688-2 | 3 | 5-104439-2 |
| | 9 | 10 | 1.98 | .198 | 103688-1 | 2 | 5-104439-1 |
| | 8 | 2 | 2.40 | 1.198 | 1-103688-1 | 12 | 1-104439-1 |
| 10 OBSOLETE | 8 | 2 | 2.20 | 1.098 | 1-103688-0 | 11 | 1-104439-0 |
| | 8 | 2 | 2.00 | .998 | 103688-9 | 10 | 104439-9 |
| | 8 | 2 | 1.80 | .898 | 103688-8 | 9 | 104439-8 |
| | 8 | 2 | 1.60 | .798 | 103688-7 | 8 | 104439-7 |
| | 8 | 2 | 1.40 | .698 | 103688-6 | 7 | 104439-6 |
| | 8 | 4 | 2.39 | .598 | 103688-5 | 6 | 104439-5 |
| | 8 | 4 | 1.99 | .498 | 103688-4 | 5 | 104439-4 |
| | 8 | 5 | 1.99 | .398 | 103688-3 | 4 | 104439-3 |
| | 8 | 5 | 1.49 | .298 | 103688-2 | 3 | 104439-2 |
| | 8 | 10 | 1.98 | .198 | 103688-1 | 2 | 104439-1 |
| PLATING | 5 | | B | A | HOUSING PART NUMBER | NO OF POSN | ASSEMBLY PART NUMBER ON STRIP |

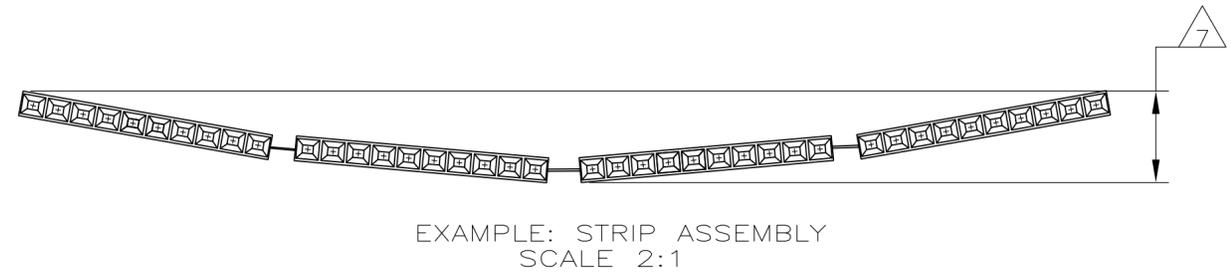

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: M PASTAL 05APR05
 CHK: J GESFORD 05APR05
 APVD: J GESFORD 05APR05

TE Connectivity

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, HIGH PRESSURE, STRIP FORM, FOR #22-#26 AWG WIRE SIZE

108-25034
 114-25026

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 104439

SCALE: 4:1 SHEET: 1 of 1 REV: K3

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR: BLACK CONTACTS: PHOS BRONZE
 FINISH: SEE TABLE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-104439-2](#)