

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0764557607

Status:

Active

Overview:

Impact Backplane Connector and Cable Assembly System

Description:


Impact 100 Ohm 2 Pair Vertical Backplane Header, Left Guide, Right Endwall, 16 Columns, 96 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead-Free

Documents:	
3D Model	Application Specification AS-76060-9999-001 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-761-001 (PDF)
Product Specification PS-76060-999-001 (PDF)	Test Summary TS-76460-0001-001 (PDF)
Application Specification AS-76060-990-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179

General	
Product Family	Backplane Connectors
Series	76455
Application	Conventional
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact Backplane Connector and Cable Assembly System
Product Name	Impact
UPC	884982576599

Physical	
Circuits (Loaded)	96
Circuits (maximum)	96
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.089/g
Number of Columns	10
Number of Pairs	2
Number of Rows	6
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55° to +85°C

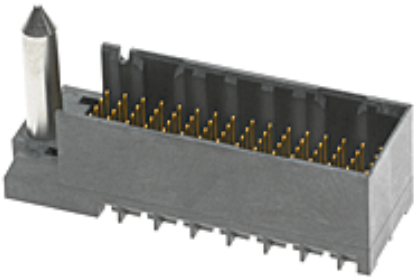

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

Green Image

REACH SVHC

Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

76455 Series

Mates With

76460 Impact 100 Ohm Daughtercard

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
Backplane Insertion Tool for Signal Contact	621005800
Backplane Header Removal Tool for GbX U-Series, GbX I-Trac, Impact, or Z-PACK TinMan	621009610
Press-In Tool for Backplane Signal	622018694

Termination Interface: Style	Through Hole - Compliant Pin	Module, 2-Pair by 16-Column
Electrical		
Current - Maximum per Contact	0.75A	
Data Rate	25.0 Gbps	
Impedance	100Ω	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	30V AC (RMS)/DC	
Solder Process Data		
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990-001, AS-76060-9999-001	
Packaging Specification	PK-70873-761-001	
Product Specification	PS-76060-999-001	
Sales Drawing	SD-76455-002-001	
Symbol/Footprint Data	SYM-76455-7607	
Test Summary	TS-76460-0001-001	

This document was generated on 09/26/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[76455-7607](#)