

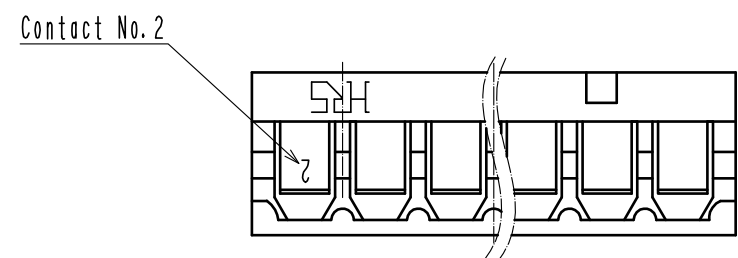
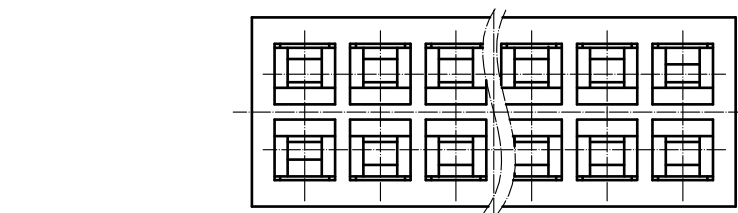
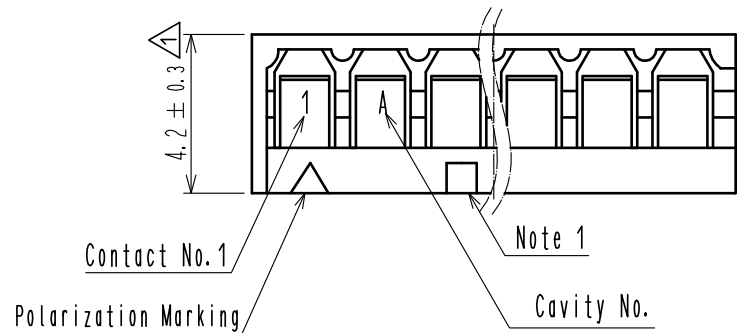



Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

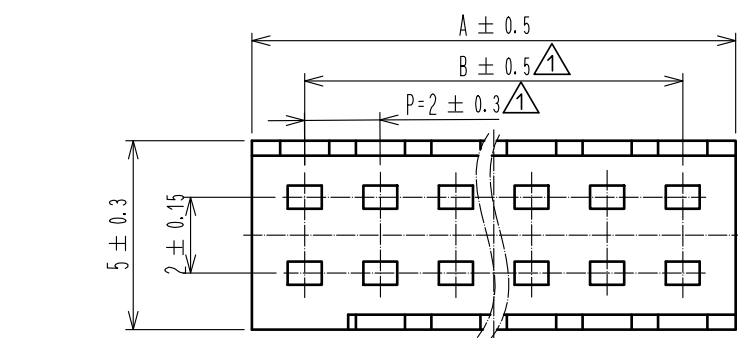

HRS DRAWING FOR REFERENCE

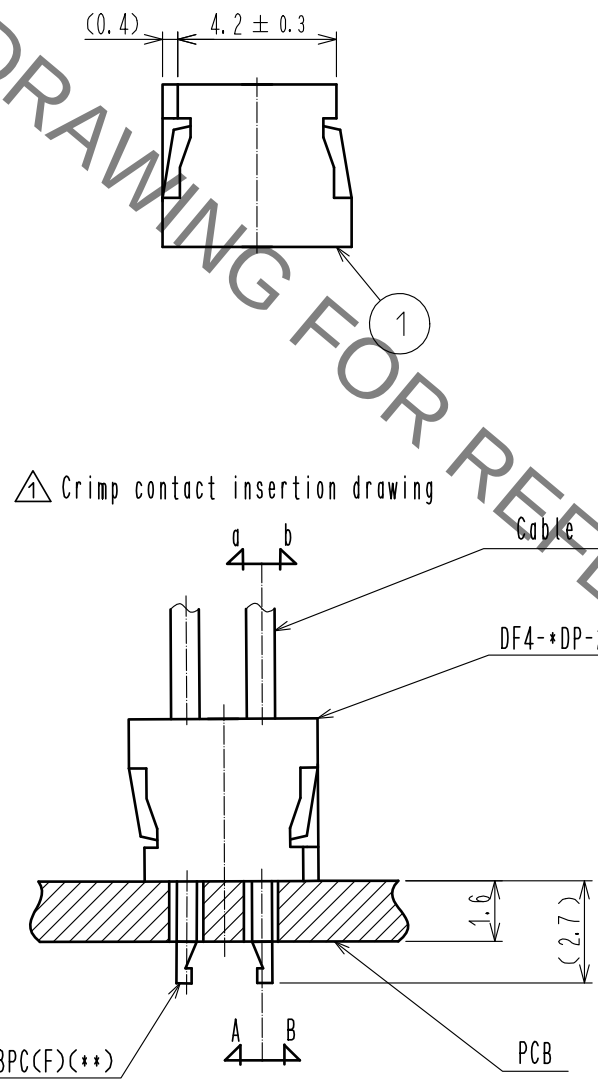

Part No.	Code No.	Number of contact	A	B
DF4- 4DP-2C	544-0078-3	4	4.8	2.0
DF4- 6DP-2C	544-0079-6	6	6.8	4.0
DF4- 8DP-2C	544-0080-5	8	8.8	6.0
DF4-10DP-2C	544-0081-8	10	10.8	8.0
DF4-12DP-2C	544-0082-0	12	12.8	10.0
DF4-14DP-2C	544-0083-3	14	14.8	12.0
DF4-16DP-2C	544-0084-6	16	16.8	14.0
DF4-18DP-2C	544-0085-9	18	18.8	16.0
DF4-20DP-2C	544-0086-1	20	20.8	18.0
DF4-22DP-2C	544-0087-4	22	22.8	20.0
DF4-24DP-2C	544-0088-7	24	24.8	22.0
DF4-26DP-2C	544-0089-0	26	26.8	24.0
DF4-28DP-2C	544-0090-9	28	28.8	26.0
DF4-30DP-2C	544-0091-1	30	30.8	28.0
DF4-32DP-2C	544-0092-4	32	32.8	30.0

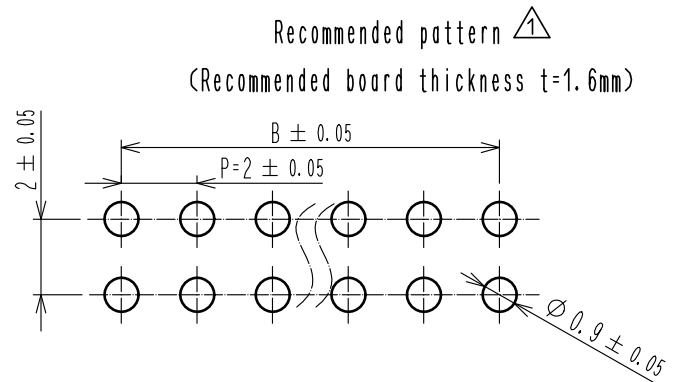

- Note 1. Square marks are indicated in relief on the part of following contact No. : 5,10,15,20,25,30
2. Recommended PCB hole diameter 0.9±0.05mm
3. In case of some thin jacket wires, tips are hard to put together. however, the way of holding these wires makes easier to put them into PCB.
Ex. When the direction of contact tip is (A), Please hold a wire to the direction(a).

NO.			1			Polyamide			UL94V-0 (BLACK)		
MATERIAL			FINISH . REMARKS			MATERIAL			FINISH . REMARKS		
UNITS mm			SCALE 5 : 1			COUNT 6			DESCRIPTION OF REVISIONS DIS-H-00004425		
APPROVED : KJ. KATAYOSE			20050105			DESIGNED HT. SATO			CHECKED SZ. ONO		
CHECKED : TY. OMA			20050105			DATE 20181116			DRAWING NO. EDC-160366-00-00		
DESIGNED : IO. DENPOUYA			20050105			PART NO. DF4- * DP-2C			CODE NO. CL544		
DRAWN : IO. DENPOUYA			20050105			1/1			1/1		