

Features

Regulated Converters

- Compact AC-DC Power Supply
- 10 Watt PCB Mount Package
- Universal Input Voltage Range
- 3000VAC Isolation
- Low Output Ripple and Noise
- Short Circuit Protected
- UL Certified, CE Marked

Description

Compact UL certified switching AC/DC power module for PCB, screw-terminal connection or DIN-rail mounting.

Selection Guide

Part Number	Input Range (VAC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max. Capacitive Load
RAC10-3.3SA	90-264	3.3	3000	65	70000µF
RAC10-05SA	90-264	5	2000	71	35000µF
RAC10-12SA	90-264	12	833	76	11000µF
RAC10-15SA	90-264	15	666	75	7000µF
RAC10-24SA	90-264	24	426	76	2300µF
RAC10-05DA	90-264	±5	±800	73	±22000µF
RAC10-12DA	90-264	±12	±380	75	±3000µF
RAC10-15DA	90-264	±15	±300	74	±2000µF

*add suffix "-E" for extended temperature range, e.g. RAC10-05SA-E

*add suffix "-ST" for screw terminal module e.g. RAC10-05SA-ST, RAC010-05DA-E-ST

Specifications (typical at 25°C and after warm up time unless otherwise specified)

Input Voltage Range	90-264VAC or 120-370VDC	
Rated Power	10 Watts max.	
Input Frequency Range (for AC Input)	47-440Hz	
Input Current (full load)	115VAC/230VAC	200mA / 130mA max.
No Load Power Consumption	115VAC/230VAC	1.65W max.
Inrush Current (<2ms)	115VAC	10A max. (-E = 23A max.)
	230VAC	20A max. (-E = 46A max.)
Leakage Current	0.75mA max.	
Output Voltage Accuracy (Full load)	±2%	
Line Voltage Regulation (low line, high line at full load)	±0.3% typ.	
Load Voltage Regulation (5% to 100% full load)	±0.5% typ.	
Output Ripple and Noise (20MHz limited)	Noise	0.5% Vout + 50mVp-p max.
	Ripple	<0.2% Vout + 40mVp-p max.
Operating Frequency	100kHz typ.	
Efficiency at Full Load	see table	
RMS Isolation Voltage (input to output)	3kVAC / 1minute	
Temperature Coefficient	±0.02%/°C typ.	
Isolation Resistance	100 MΩ min.	
Short Circuit Protection	Hiccup, Automatic Restart	
Operating Temperature Range	Standard	-25°C to +70°C
(free air convection, with derating)	Suffix -E	-40°C to +70°C
Storage Temperature Range	-40°C to +85°C	
Humidity	95% RH max.	
Case Material	Epoxy with Fibreglass (UL94V-0)	
Package Weight	92g	
Packing Quantity	5 pcs (-ST Version: 1 pc)	
EMC	EN 55022 Class B / EN 50082-1	
MTBF (+25°C)	using MIL-HDBK-217F	250 x 10 ³ hours

POWERLINE

AC/DC-Converter

with 3 year Warranty

RECOM


10 Watt Single/Dual Output



UL-60950-1 Certified

RAC10-A

Derating-Graph (Ambient Temperature)

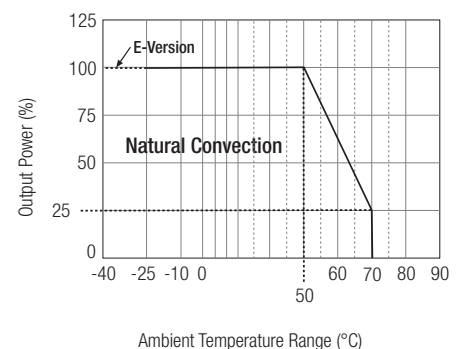


Refer to Application Notes

POWERLINE

AC/DC-Converter

RAC10-S_DA Series

Screw Terminal Module Option (suffix -ST)


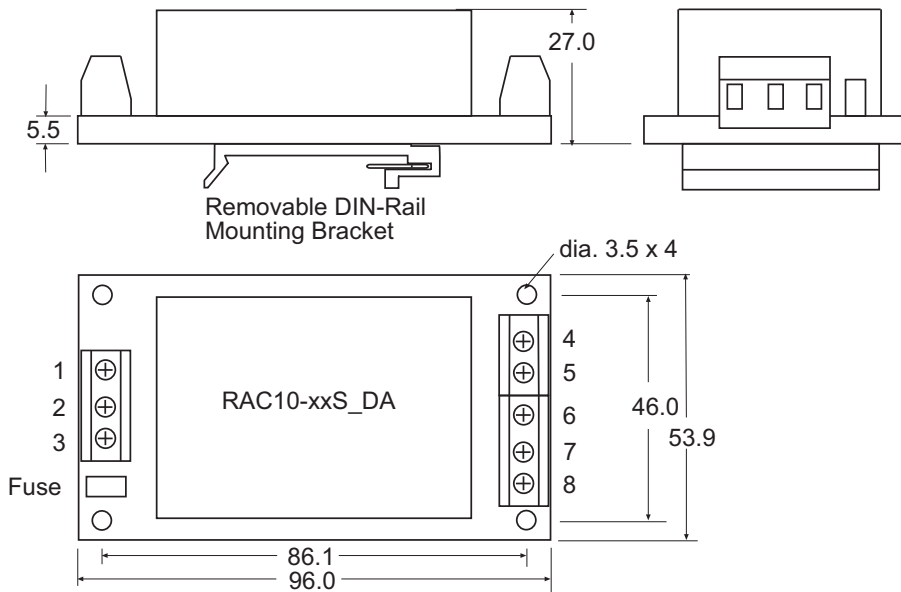


Pin Connections

Pin #	Single Out	Dual Out
1	FG	FG
2	VAC in (N)	VAC in (N)
3	VAC in (L)	VAC in (L)
4	NC	NC
5	-VDC out	-VDC out
6	NC	Com
7	+VDC out	+VDC out
8	NC	NC

NC = No Connection

Standard Package Style and Pinning

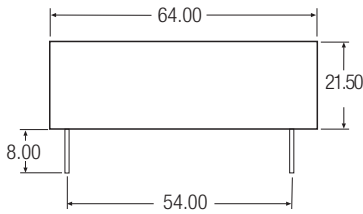


Pin Connections

Pin #	Single Out	Dual Out
1	FG	FG
2	VAC in (N)	VAC in (N)
3	VAC in (L)	VAC in (L)
4	-VDC out	-VDC out
5	No Pin	Com
6	+VDC out	+VDC out

XX.X ± 0.5 mm


XX.XX ± 0.25 mm

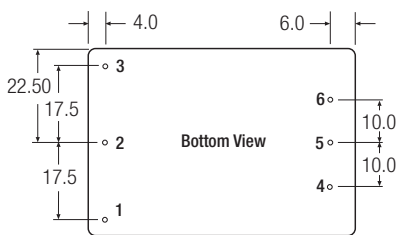

RAC10-A

Standard Application Circuit

Suggested fuse rating
2A Slow Blow

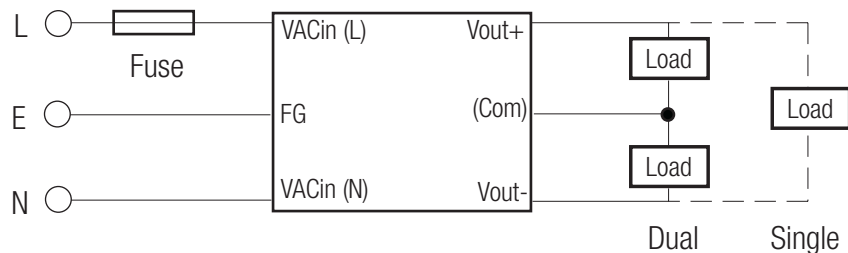

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[RAC10-05DA](#) [RAC10-05DA-E](#) [RAC10-05DA-E-ST](#) [RAC10-05DA-ST](#) [RAC10-05SA](#) [RAC10-05SA-E](#) [RAC10-05SA-E-ST](#) [RAC10-05SA-ST](#) [RAC10-12DA](#) [RAC10-12DA-E](#) [RAC10-12DA-E-ST](#) [RAC10-12DA-ST](#) [RAC10-12SA](#) [RAC10-12SA-E](#) [RAC10-12SA-E-ST](#) [RAC10-12SA-ST](#) [RAC10-15DA](#) [RAC10-15DA-E](#) [RAC10-15DA-E-ST](#) [RAC10-15DA-ST](#) [RAC10-15SA](#) [RAC10-15SA-E](#) [RAC10-15SA-E-ST](#) [RAC10-15SA-ST](#) [RAC10-24SA](#) [RAC10-24SA-E](#) [RAC10-24SA-E-ST](#) [RAC10-24SA-ST](#) [RAC10-3.3SA](#) [RAC10-3.3SA-E](#) [RAC10-3.3SA-E-ST](#) [RAC10-3.3SA-ST](#)