


CR2477


■ Dimensions(mm)

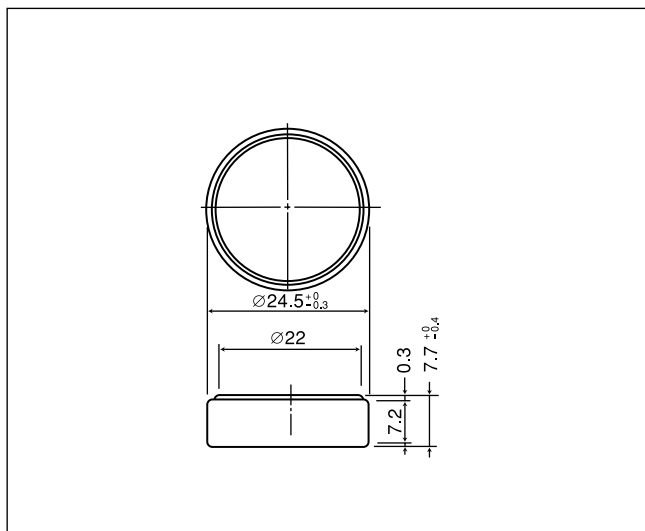


■ Specification

Nominal voltage(V)	3
Nominal capacity(mAh)	1,000
Continuous drain(mA)	0.2
Operating temperature(°C)	-30 to +60


■ Discharge temperature characteristics

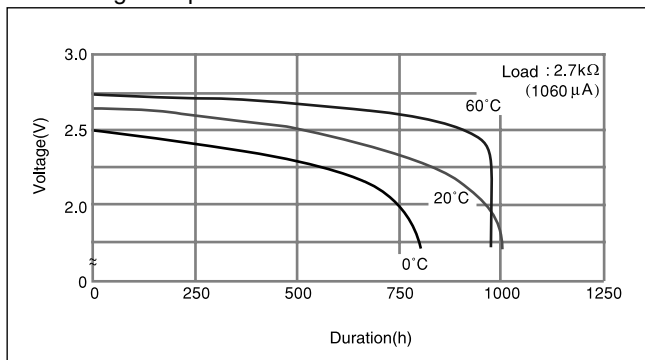

■ Operating voltage vs. load resistance(voltage at 50% discharge depth)

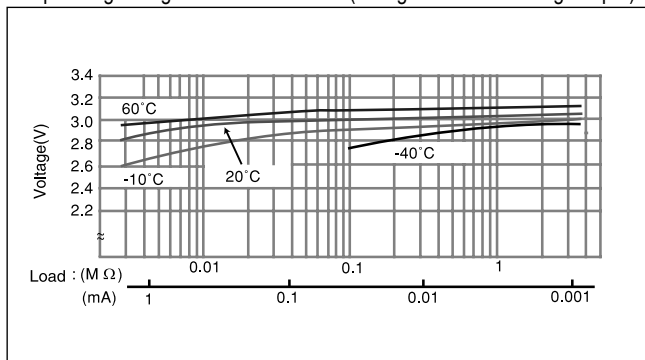


■ Capacity vs. load resistance

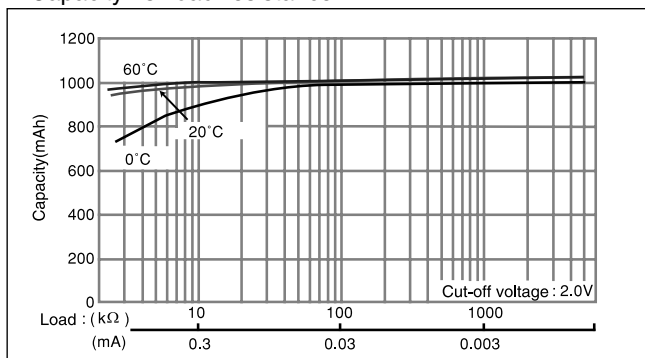

CR3032


■ Dimensions(mm)

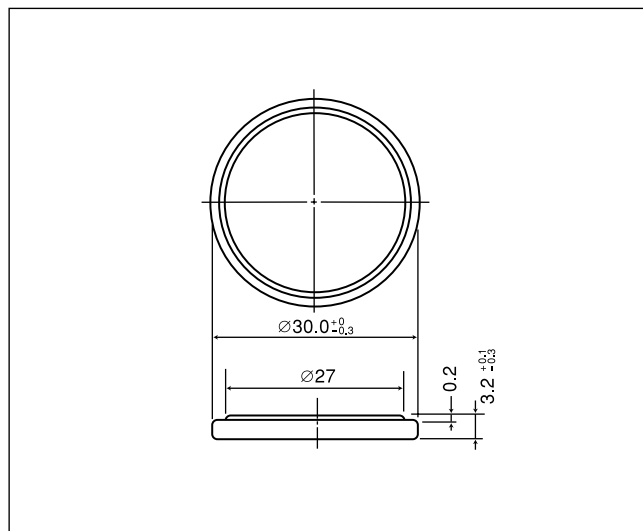


■ Specification

Nominal voltage(V)	3
Nominal capacity(mAh)	500
Continuous drain(mA)	0.2
Operating temperature(°C)	-30 to +60


■ Discharge temperature characteristics

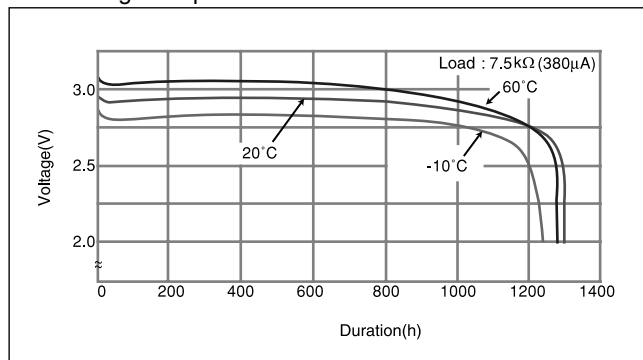

■ Operating voltage vs. load resistance(voltage at 50% discharge depth)

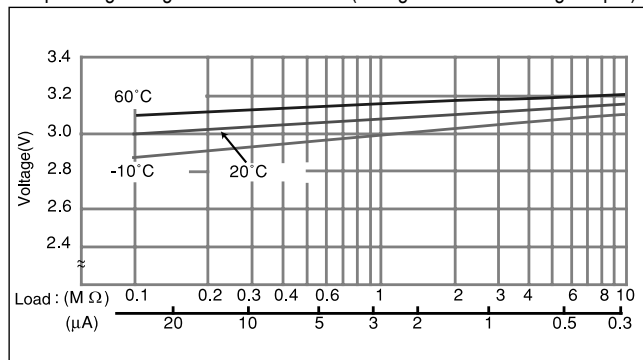

■ Capacity vs. load resistance

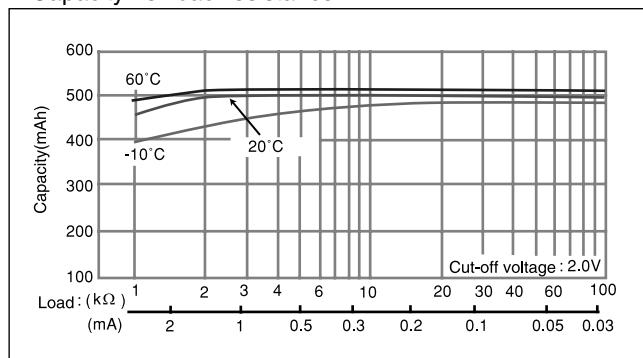

* The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[CR2477/HFN](#) [CR-2477/VCN](#) [CR-2477/F2N](#) [CR-2477/HEN](#) [CR-2477/HFN](#)