


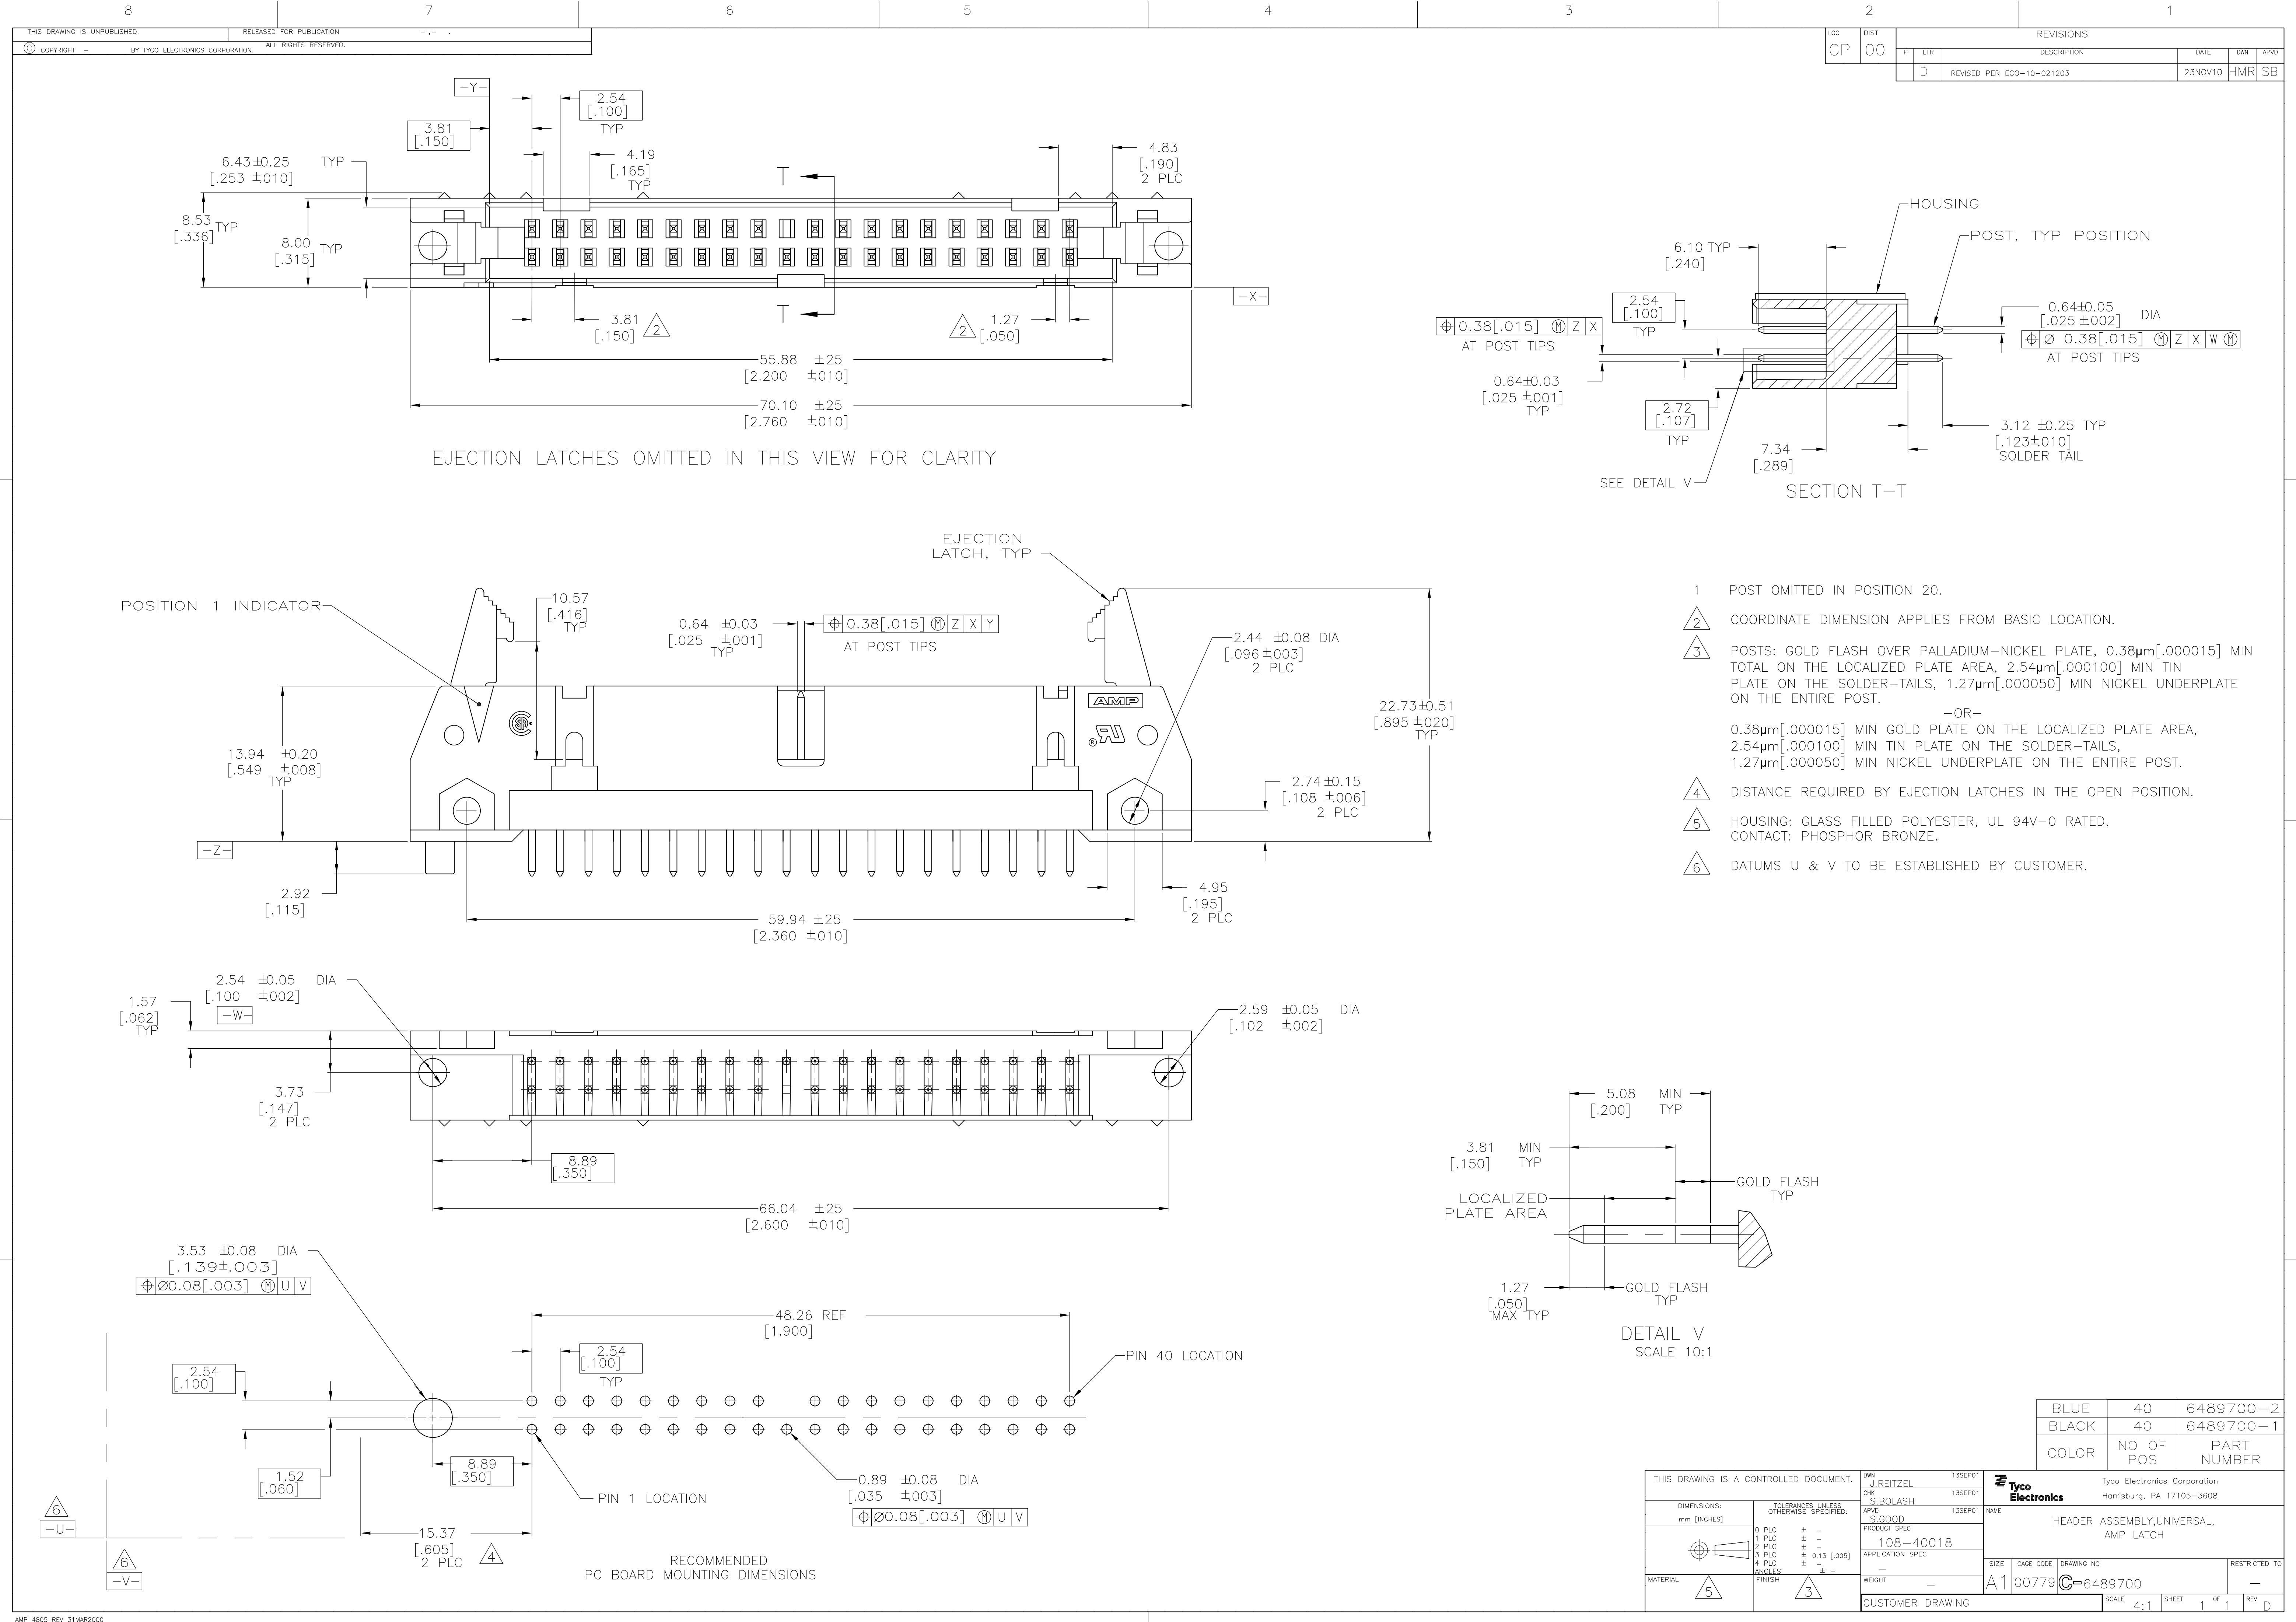

- 1 POST OMITTED IN POSITION 20.
- 2 COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.
- 3 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.38μm[.000015] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN PLATE ON THE SOLDER-TAILS, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
0.38μm[.000015] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN PLATE ON THE SOLDER-TAILS, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 4 DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.
- 5 HOUSING: GLASS FILLED POLYESTER, UL 94V-0 RATED. CONTACT: PHOSPHOR BRONZE.
- 6 DATUMS U & V TO BE ESTABLISHED BY CUSTOMER.

BLUE	40	6489700-2
BLACK	40	6489700-1
COLOR	NO. OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. REITZEL 13SEP01	Tyco Electronics Corporation	
DIMENSIONS: mm [INCHES]		CHK S. BOLASH 13SEP01	Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. GOOD 13SEP01	NAME	
0 PLC ± -		PRODUCT SPEC	108-40018	
1 PLC ± -		APPLICATION SPEC	—	
2 PLC ± -		—	—	
3 PLC ± 0.13 [.005]		—	—	
4 PLC ± -		—	—	
ANGLES ± -		—	—	
FINISH		—	—	
MATERIAL		—	—	
5		—	—	
3		—	—	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1 REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6489700-2](#)