

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION20

© COPYRIGHT 20BY -ALL RIGHTS RESERVED.






| LOC | DIST | REVISIONS |     |                           |         |     |      |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
|     |      | P         | LTR | DESCRIPTION               | DATE    | DWN | APVD |
| AF  | -    |           | A1  | REVISED PER ECR-14-004708 | 28MAR14 | JR  | KR   |
|     |      |           |     |                           |         |     |      |
|     |      |           |     |                           |         |     |      |
|     |      |           |     |                           |         |     |      |

D

C

B

A

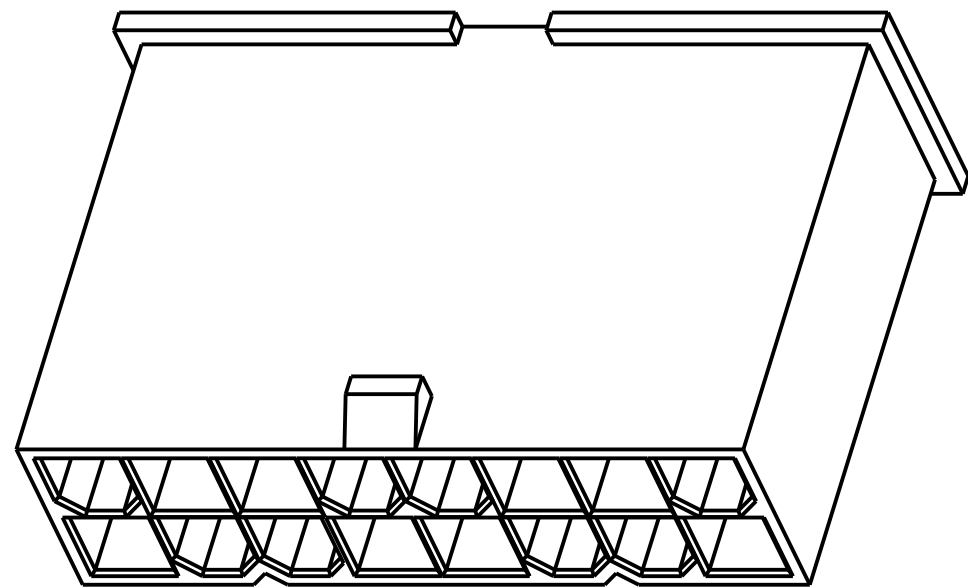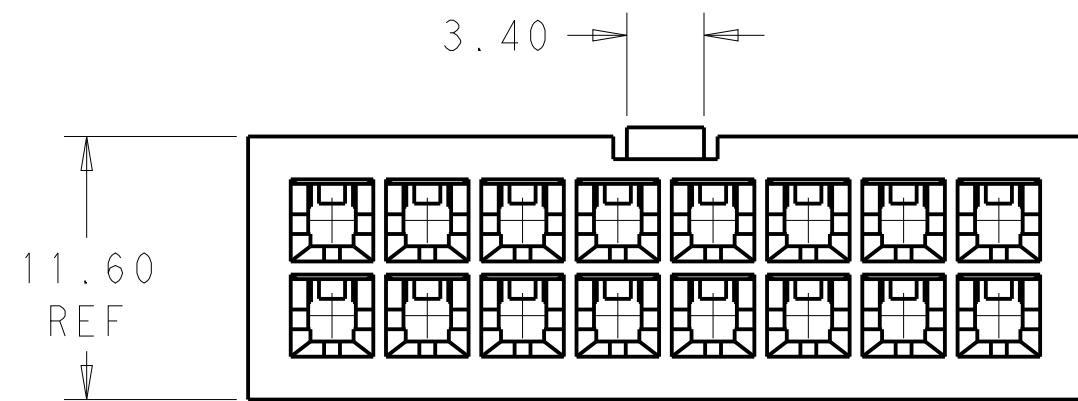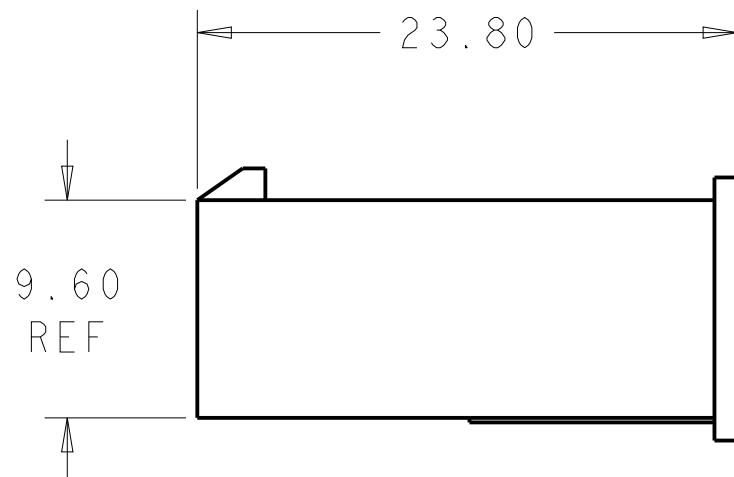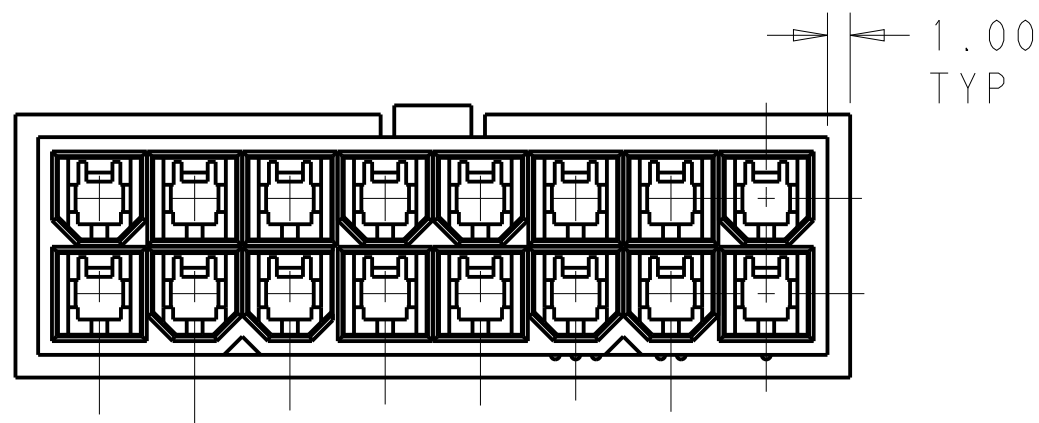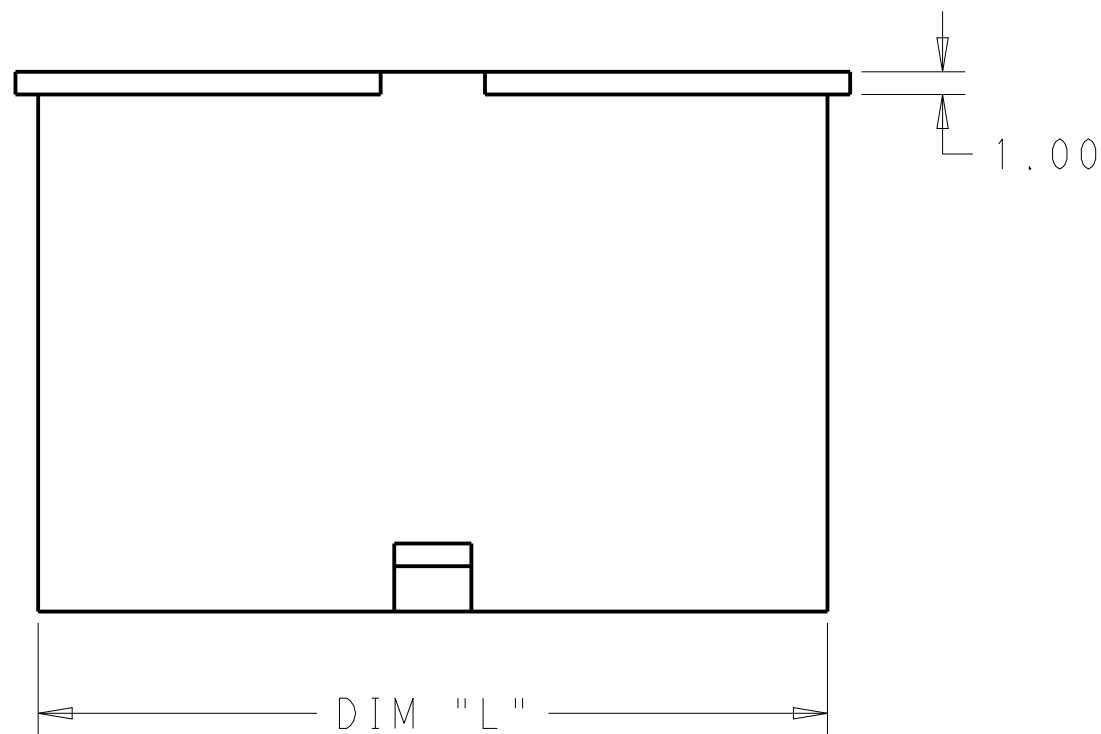

- 1 POLYAMIDE, UL94V-2, COLOR- WHITE
- 2 FLAMMABILITY V2 FOR THICKNESS 0.38mm, 1.5mm NAD 3.0mm PER IEC 60695-11-10.
- 3 GLOW-WIRE FLAMMABILITY (GWFI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
- 4 GLOW-WIRE FLAMMABILITY (GWFI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
- 5 GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-2-13.
- 6 COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30(GWT).

D

C

B

A

|       |            |             |
|-------|------------|-------------|
| 51.60 | 24         | 2-1969604-4 |
| 47.40 | 22         | 2-1969604-2 |
| 43.20 | 20         | 2-1969604-0 |
| 39.00 | 18         | 1-1969604-8 |
| 34.80 | 16         | 1-1969604-6 |
| 30.60 | 14         | 1-1969604-4 |
| 26.40 | 12         | 1-1969604-2 |
| 22.20 | 10         | 1-1969604-0 |
| 18.00 | 8          | 1969604-8   |
| 13.80 | 6          | 1969604-6   |
| 9.60  | 4          | 1969604-4   |
| 5.40  | 2          | 1969604-2   |
| DIM L | NO. OF POS | PART NO.    |

|                                                         |  |                                   |                                                                                                       |  |  |  |
|---------------------------------------------------------|--|-----------------------------------|-------------------------------------------------------------------------------------------------------|--|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                  |  | DWN<br>JR RUTH<br>26SEPT13        |  TE Connectivity |  |  |  |
| DIMENSIONS:<br>mm                                       |  | CHK<br>KURT RANDOLPH<br>26SEPT13  |                                                                                                       |  |  |  |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:                  |  | APVD<br>KURT RANDOLPH<br>26SEPT13 | NAME<br>PLUG HOUSING<br>VAL-U-LOK, GLOW WIRE                                                          |  |  |  |
| 0 PLC ±<br>1 PLC ±<br>2 PLC ±0.25<br>3 PLC ±<br>4 PLC ± |  | PRODUCT SPEC<br>-                 | SIZE<br>A200779                                                                                       |  |  |  |
| MATERIAL<br>1                                           |  | APPLICATION SPEC<br>-             | CAGE CODE<br>C-1969604                                                                                |  |  |  |
|                                                         |  | WEIGHT<br>-                       | DRAWING NO<br>-                                                                                       |  |  |  |
|                                                         |  | Customer Drawing                  | RESTRICTED TO<br>-                                                                                    |  |  |  |
|                                                         |  |                                   | SCALE 3:1 SHEET 1 OF 1 REV A1                                                                         |  |  |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1969604-0](#)