



REVERSE FIBER PATH

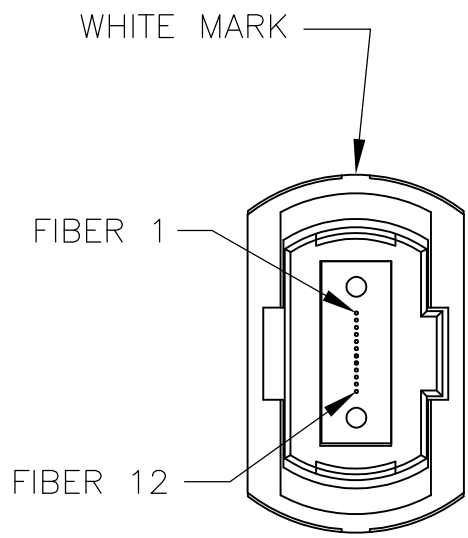

VIEW A-A
NOT TO SCALE

MPO LEFT FIBER #		MPO RIGHT FIBER #
1	↔	12
2	↔	11
3	↔	10
4	↔	9
5	↔	8
6	↔	7
7	↔	6
8	↔	5
9	↔	4
10	↔	3
11	↔	2
12	↔	1

MPO CONNECTOR FIBER PATH

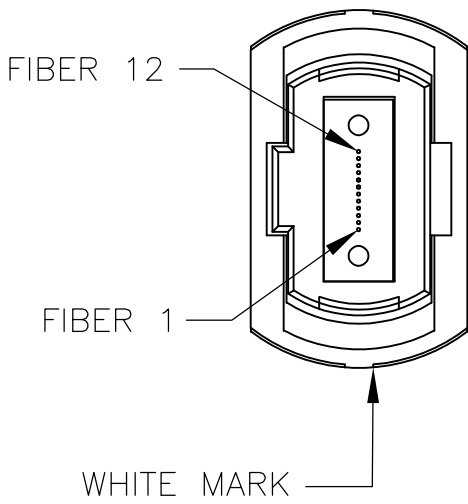

VIEW B-B
NOT TO SCALE

- NOTES:
- 1 MAXIMUM CONNECTOR INSERTION LOSS (850nm): 0.5dB + 3.5dB/km. SEE TABLE.
 - 2 STANDARD TRACE LABEL TO BE APPLIED AT BOTH ENDS.
 - 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-
FINISH	-	-

DWN: K.GLATFELTER

CHK: J.BARRY

APVD: J.BARRY

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

14JAN2009

-

-

-

-

-

-

SCALE NTS

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

CABLE ASSEMBLY, FIBER OPTIC, 50/125um
3mm ROUND CABLE, OFNP, MPO W/NO PINS,
REVERSED PATH

SIZE A2

CAGE CODE 00779

DRAWING NO C-1938209

RESTRICTED TO

SHEET 1 of 2

REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1938209-5](#)