


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	00				
	C	REVISED PER ECO-14-008329	4JUN14	AM	MY

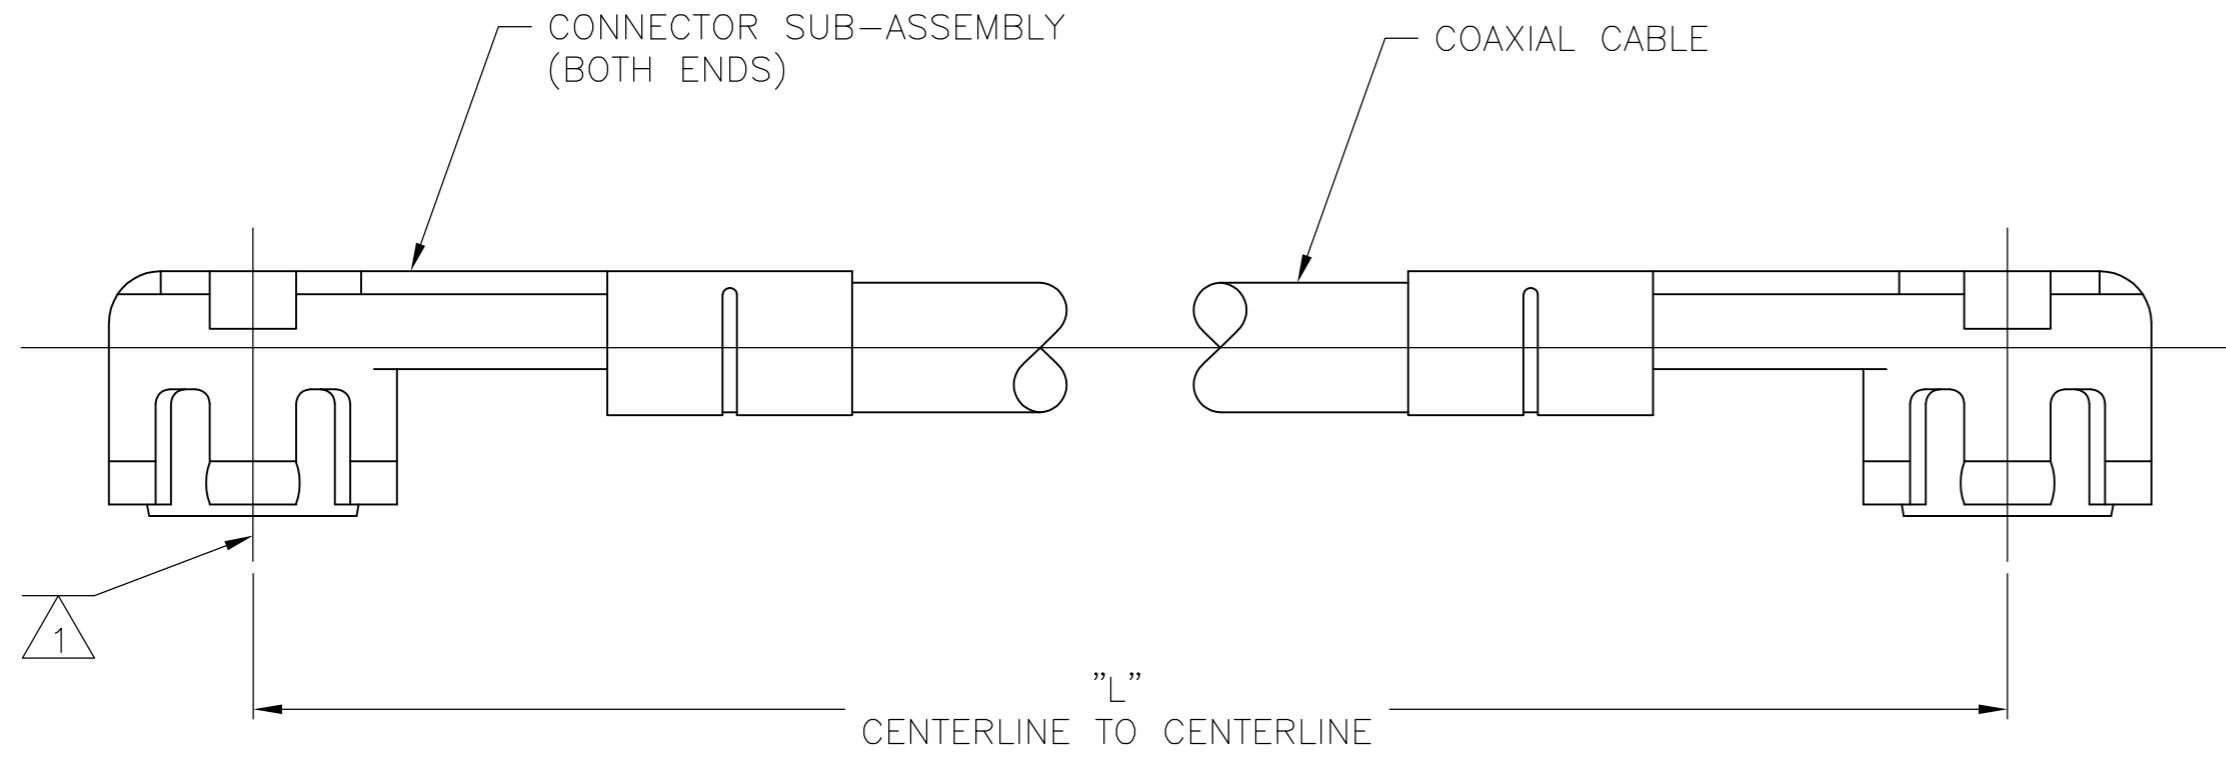

△ CONNECTOR CENTERLINES SHALL BE ALIGNED AS SHOWN WITHIN ±30° FOR LENGTHS 165mm OR LESS LENGTHS ABOVE 165mm SHALL HAVE CONNECTOR CENTERLINES ALIGNED AT RANDOM

330±5	1064533-3
915±10	1064533-2
315±5	1064533-1
"L"	PART NUMBER

ELECTRICAL	
FREQUENCY	DC - 6 GHz
NOMINAL IMPEDENCE	50 OHMS
VOLTAGE RATING	250 VOLTS (VRMS MAX) @ SEA LEVEL
VSWR (MATED CONNECTORS ONLY)	1.20:1 MAX @ 2 GHz 1.40:1 MAX @ 6 GHz
INSULATION RESISTANCE	1,000 MEGOHMS MIN @ 250VDC
DIELECTRIC WITHSTANDING VOLTAGE	500 VOLTS (VRMS MIN) @ SEA LEVEL
MECHANICAL	
CONNECTOR DURABILITY	100 MATING CYCLES
ENVIRONMENTAL	
TEMPERATURE RATING	-40°C(-40°F) TO +125°C(257°F)

COMPONENT	MATERIAL	FINISH
SSMT CONNECTOR		
OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE OVER NICKEL PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
CABLE		
JACKET	FLUORINATED ETHYLENE PROPYLENE (FEP)	N/A
SHIELD	COPPER WIRE, 44 AWG	SILVER PLATE
DIELECTRIC	POLYTETRAFLUOROETHYLENE (PTFE)	N/A
CENTER CONDUCTOR	COPPER CLAD STEEL, 30 AWG	SILVER PLATE

PRODUCT SPEC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 04MAY2006	STE TE Connectivity
		CHK KE WEIDNER 04MAY2006	
		APVD KE WEIDNER 04MAY2006	
		PRODUCT SPEC	
		APPLICATION SPEC	NAME SSMT RIGHT ANGLE JACK TO JACK CABLE ASSEMBLY
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	SIZE A2
		0 PLC ± -	CAGE CODE 00779
		1 PLC ± -	DRAWING NO C=1064533
		2 PLC ± -	RESTRICTED TO -
		3 PLC ± 0.13	
		4 PLC ± -	
		ANGLES ± 1°	
MATERIAL -		FINISH -	SCALE 15:1
		WEIGHT -	SHEET 1 OF 1
		CUSTOMER DRAWING	REV C

1064533

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9960-1305-24](#)