

REV. 0

DCO 15810


COIL: @ 25°C	
RESISTANCE	700 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	15.0 VDC
MUST RELEASE	8.0 VDC MAX 1.5 VDC MIN

ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	100	g's	6 ±1	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE OF -48 VDC WITH BIFILAR COIL OPERATE & RELEASE 5 MS MAX. CONTACT STABILIZATIN 2.5 MS MAX.

CUSTOMER DATA SHEET

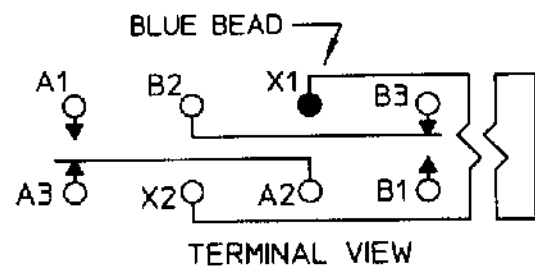

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 9/7/99 CK: 1/7/99



HMB1230K01M

CUST. QPL  
CUST. NO. M39016/22-005M REV.

'HMB' RELAY

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HMB1230K01M](#)