

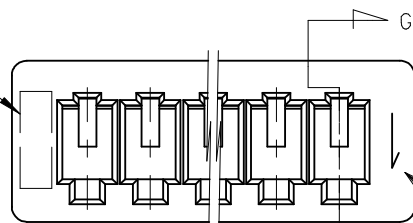



トレードマーク
TRADE MARK



CKT.NO.1

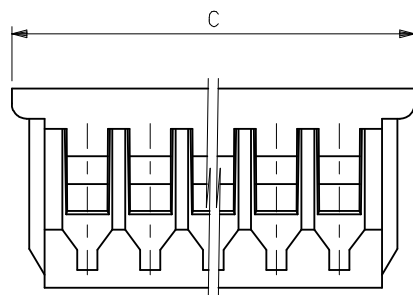

SECT. G-G

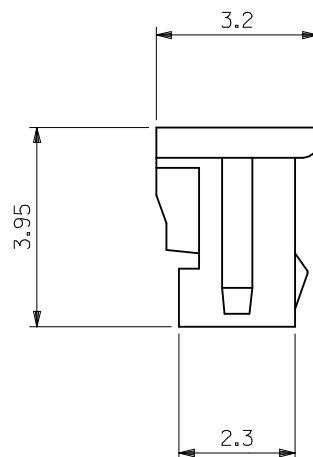

注記 NOTES

- 材料: 66ナイロン(黒), UL94V-0 塩素系、臭素系難燃剤 非使用
66 NYLON (BLACK), UL94V-0 CHLORINATED FLAME RETARDANTS FREE/
BROMINATED FLAME RETARDANTS FREE
- 適合ターミナル: 50058, 50079 シリーズ
APPLICABLE TERMINAL: 50058, 50079 SERIES
- 嵌合相手: 53047, 53048, 53261, 53398 シリーズ
MATE WITH: 53047, 53048, 53261, 53398 SERIES
- ロックは、2, 3極は1ヶ, 4極以上は2ヶとする。
LOCKING WINDOW: ONE PLACE FOR 2 & 3 CKT.
AND TWO PLACES FOR MORE THAN 3 CKT.
- ELV 及び RoHS適合品
ELV AND RoHS COMPLIANT.

11.75	10.45	8.75	51021-8608	8
10.5	9.2	7.5	51021-8607	7
9.25	7.95	6.25	51021-8606	6
8	6.7	5	51021-8605	5
6.75	5.45	3.75	51021-8604	4
5.5	4.2	2.5	51021-8603	3
4.25	2.95	1.25	51021-8602	2
C	B	A	PLASTIC BAG ORDER No. オーダー番号	極数 CKTS.

RELEASED EC NO: J2009-0526 2008/09/01 DRWN:MABEI 2008/09/01 CHKD:HARUYAMA 2008/09/01 APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	M. NABEI	DATE '08/08/29	TITLE 1.25 W/B CONN REC.HSG				
		10 OVER 30 UNDER	± 0.25	CHECKED BY T. HARUYAMA						DATE '08/08/29
		30 OVER	± 0.3	APPROVED BY N. UKITA		DATE '08/08/29	 MOLEX INCORPORATED			
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-51021-003		1 OF 1			
0	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[51021-8604](#)