

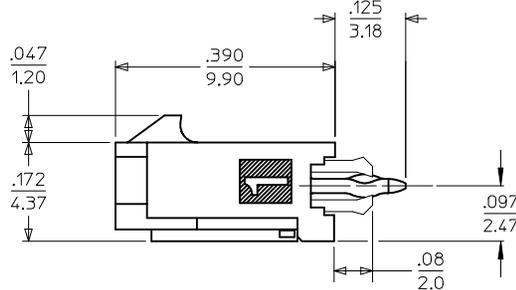


PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: .062/157

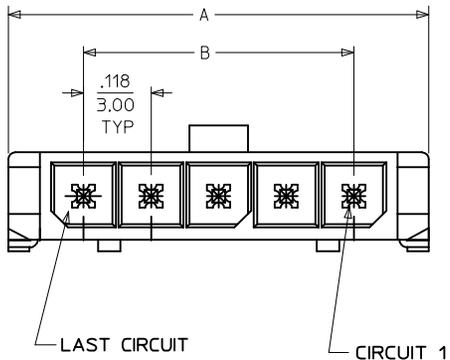


PRESS FIT RETENTION CLIP

| CKTS | DIM A | DIM B | DIM C |
|------|----------------|----------------|----------------|
| 2 | .380 9.65 | .118 3.00 | .287 7.30 |
| 3 | .498 12.65 | .236 6.00 | .405 10.30 |
| 4 | .616 15.65 | .354 9.00 | .524 13.30 |
| 5 | .734 18.64 | .472 12.00 | .642 16.30 |
| 6 | .852 21.64 | .591 15.00 | .760 19.30 |
| 7 | .970 24.64 | .709 18.00 | .878 22.30 |
| 8 | 1.088 27.64 | .827 21.00 | .996 25.30 |
| 9 | 1.206 30.63 | .945 24.00 | 1.114 28.30 |
| 10 | 1.325 33.66 | 1.063 27.00 | 1.232 31.30 |
| 11 | 1.443 36.65 | 1.181 30.00 | 1.350 34.30 |
| 12 | 1.561 39.65 | 1.299 33.00 | 1.469 37.30 |

NOTES:

- HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, GLASS FILLED, UL94V-0, COLOR: BLACK
TERMINAL MATERIAL: BRASS ALLOY
- FINISH:
A = .000060/(0.00152) MIN. REFLOWED MATTE TIN OVER
.000050/(0.00127) MIN. NICKEL PLATE
(FINISH IS BRIGHT IN APPEARANCE, THICKNESS AS APPLIED PRIOR TO REFLOW)
B = .000015/(0.00038) MIN. SELECT GOLD IN CONTACT AREA
.000100/(0.00254) MIN. SELECT MATTE TIN ON SOLDER TAILS
BOTH OVER .000050/(0.00127) NICKEL OVERALL
C = .000030/(0.00076) MIN. SELECT GOLD IN CONTACT AREA
.000100/(0.00254) MIN. SELECT MATTE TIN ON SOLDER TAILS
BOTH OVER .000050/(0.00127) NICKEL OVERALL
D = .000100/(0.00254) MIN. MATTE TIN OVER
.000050/(0.00127) MIN. NICKEL OVERALL
- PRODUCT SPECIFICATION: PS-43650
- TRAY PACKAGED : SEE MOLEX DRAWING PK-70873-0811
- MATES WITH MICRO FIT (3.0) RECEPTACLE SERIES 43645
- PARTS CONFORM TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

| CKTS | FINISH A | | FINISH B | | FINISH C | | FINISH D | |
|------|--------------|----------|--------------|----------|--------------|----------|--------------|----------|
| | MATERIAL NO: | VOID CKT |
| 02 | 43650-0218 | | 43650-0219 | | 43650-0220 | | 43650-0263 | |
| 03 | 43650-0318 | | 43650-0319 | | 43650-0320 | | 43650-0363 | |
| 04 | 43650-0418 | | 43650-0419 | | 43650-0420 | | 43650-0463 | |
| 05 | 43650-0518 | | 43650-0519 | | 43650-0520 | | 43650-0563 | |
| 06 | 43650-0618 | | 43650-0619 | | 43650-0620 | | 43650-0663 | |
| 07 | 43650-0718 | | 43650-0719 | | 43650-0720 | | 43650-0763 | |
| 08 | 43650-0818 | | 43650-0819 | | 43650-0820 | | 43650-0863 | |
| 09 | 43650-0918 | | 43650-0919 | | 43650-0920 | | 43650-0963 | |
| 10 | 43650-1018 | | 43650-1019 | | 43650-1020 | | 43650-1063 | |
| 11 | 43650-1118 | | 43650-1119 | | 43650-1120 | | 43650-1163 | |
| 12 | 43650-1218 | | 43650-1219 | | 43650-1220 | | 43650-1263 | |
| 03 | 43650-0331 | 02 | | | | | | |
| 04 | 43650-1431 | 2,3 | 43650-0436 | 2,3 | | | | |
| 05 | 43650-1531 | 2,3,4 | | | | | | |
| 06 | | | 43650-0636 | 2,3,4,5 | | | | |

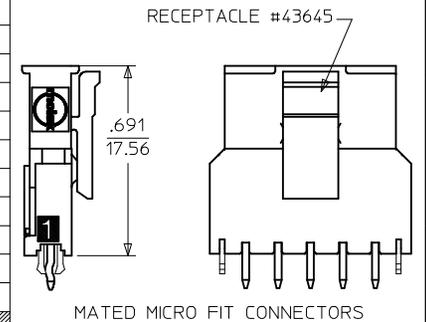

MATED MICRO FIT CONNECTORS

| | | |
|---------------------|------------|-----------------|
| ADD FINISH D | 2016/06/22 | QUALITY SYMBOLS |
| EC NO: UCP2016-4586 | 2016/06/22 | ▽=0 |
| DRW/CSL/AFTER | 2016/06/22 | ▽=0 |
| CHKD:SSO/SEK | 2016/08/23 | ▽=0 |
| APPR:FSM/LTH | | |
| REV | | |

| GENERAL TOLERANCES (UNLESS SPECIFIED) | |
|--|--------|
| mm | INCH |
| 4 PLACES ± --- | ± --- |
| 3 PLACES ± --- | ± .010 |
| 2 PLACES ± 0.25 | ± .014 |
| 1 PLACE ± 0.36 | ± --- |
| 0 PLACE ± --- | ± --- |
| ANGULAR ±1/2° | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | |

| DIMENSION STYLE | |
|-----------------|------------|
| IN/MM | |
| DRAWN BY | DATE |
| SAMIEC | 2000/07/07 |
| CHECKED BY | DATE |
| MUELLER | 2000/07/07 |
| APPROVED BY | DATE |
| FSMITH | 2016/08/23 |

| | | |
|---|--------------|------------------------|
| SCALE | DESIGN UNITS | THIRD ANGLE PROJECTION |
| --- | METRIC | |
| TITLE | | |
| MICRO-FIT (3.0) SINGLE ROW / VERTICAL THRU HOLE / CLIPS / TRAY | | |
| molex | | |
| MATERIAL NO. | DOCUMENT NO. | SHEET NO. |
| SEE CHART | SD-43650-007 | 1 OF 1 |
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[43650-0436](#)