


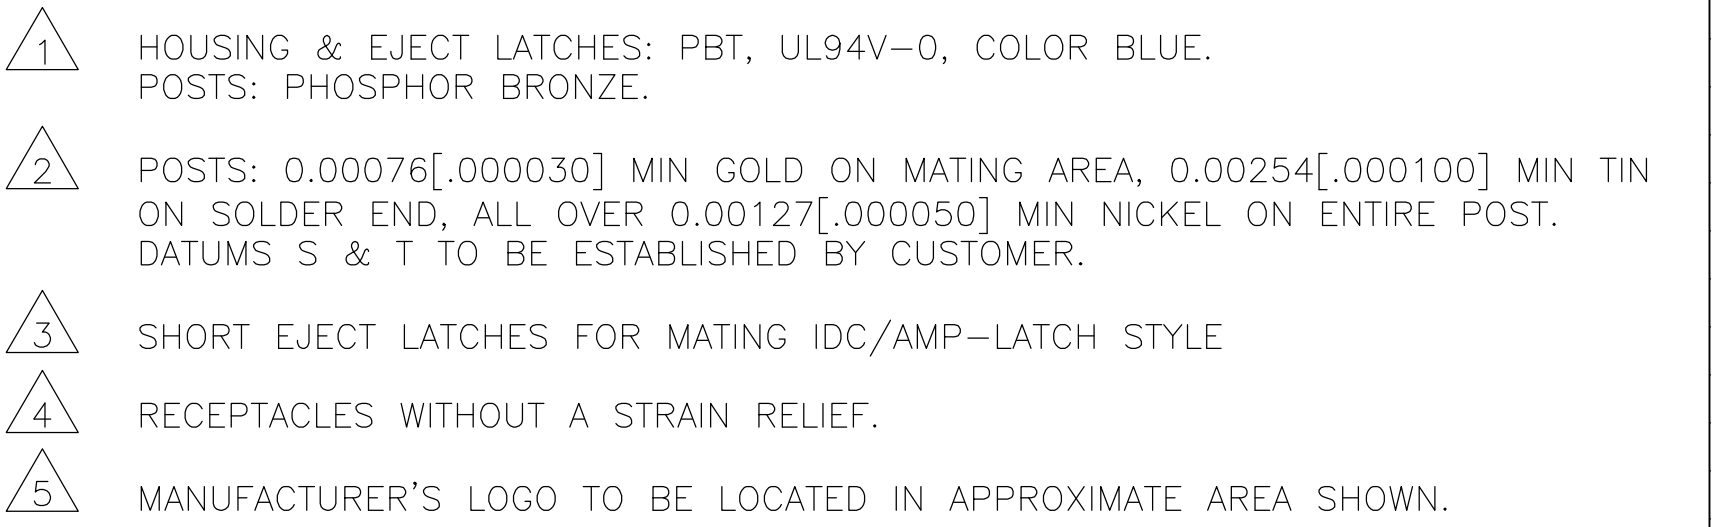

OBSOLETE	78.74 [3.100]	31	86.36 [3.400]	100.33 [3.950]	64	1-1761685-7	
	73.66 [2.900]	29	81.28 [3.200]	95.25 [3.750]	60	1-1761685-6	
	60.96 [2.400]	24	68.58 [2.700]	82.55 [3.250]	50	1-1761685-5	
	53.34 [2.100]	21	60.96 [2.400]	74.93 [2.950]	44	1-1761685-4	
	48.26 [1.900]	19	55.88 [2.200]	69.85 [2.750]	40	1-1761685-3	
OBSOLETE	43.18 [1.700]	17	50.80 [2.000]	64.77 [2.550]	36	1-1761685-2	
	40.64 [1.600]	16	48.26 [1.900]	62.23 [2.450]	34	1-1761685-1	
	35.56 [1.400]	14	43.18 [1.700]	57.15 [2.250]	30	1-1761685-0	
	30.48 [1.200]	12	38.10 [1.500]	52.07 [2.050]	26	1761685-9	
	27.94 [1.100]	11	35.56 [1.400]	49.53 [1.950]	24	1761685-8	
	22.86 [.900]	9	30.48 [1.200]	44.45 [1.750]	20	1761685-7	
	17.78 [.700]	7	25.40 [1.000]	39.37 [1.550]	16	1761685-6	
	OBSOLETE	15.24 [.600]	6	22.86 [.900]	36.83 [1.450]	14	1761685-5
		12.70 [.500]	5	20.32 [.800]	34.29 [1.350]	12	1761685-4
		10.16 [.400]	4	17.78 [.700]	31.75 [1.250]	10	1761685-3
	D	C	B	A	NO OF POS	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN D. CRISAMORE/DTI		OSUNDS		Tyco Electronics Corporation		Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		CNC S. BOLASH		OSUNDS		NAME	
		1. PLC ± —		APPROVED M. WALMSLEY		PRODUCT SPEC		HEADER ASSEMBLY, SHORT EJECT LATCH, VERTICAL, LOW PROFILE, IDC	
		2. PLC ± —		—		—		—	
		3. PLC ± 0.13[.005]		APPLICATION SPEC		—		—	
		4. PLC ± —		—		—		—	
ANGLES FINISH		1. ± —		—		—		—	
MATERIAL 1		2. ± — 2		WEIGHT		—		—	
CUSTOMER DRAWING		A1		00779		C-1761685		—	
SCALE		4:1		SHEET		1 OF 1		REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1761685-6](#)