

SPECIFICATION CONTROL DRAWING

55A2111

TITLE

CABLE, RADIATION-CROSSLINKED, MODIFIED, ETFE-INSULATED,
ONE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, LIGHTWEIGHT

Date

12 -7 - 90

Revision


B

This Specification sheet forms a part of the latest issue of Raychem Specifications 55A

COMPONENT WIRE - 55A0111

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

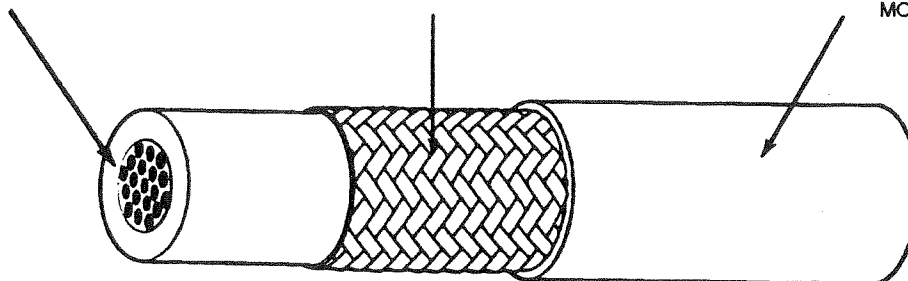

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS ($\pm .0004$ in.)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lb/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A2111-30-*	30	.0015	.006	.008	.046	.052	2.2
55A2111-28*	28	.0015	.006	.008	.049	.055	2.6
55A2111-26*	26	.0015	.006	.008	.054	.060	3.3
55A2111-24*	24	.0015	.006	.008	.059	.065	4.1
55A2111-22*	22	.0015	.006	.008	.065	.071	5.3
55A2111-20*	20	.0015	.006	.008	.073	.079	7.3
55A2111-18*	18	.0015	.006	.008	.083	.088	9.8
55A2111-16*	16	.0015	.006	.008	.091	.096	11.9
55A2111-14*	14	.0015	.006	.008	.108	.113	17.4
55A2111-12*	12	.0015	.006	.008	.126	.132	25.0

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 $\pm$ 3°C for 7 hours

BLOCKING: 200 $\pm$ 3°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts, 60 Hz

FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 in. (maximum);
no flaming or facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in.² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts, 60 Hz (rms), 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 $\pm$ 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 $\pm$ 3°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

THERMAL SHOCK: 300 $\pm$ 3°C for 6 hours

VOLTAGE WITHSTAND TEST: (After Accelerated Aging.

Immersion, Life Cycle, Low Temperature-Cold Bend
and Thermal Shock) 1000 volts, 60 Hz, 1 minute

PART NUMBER:

The *** in the part numbers above shall be replaced by
color code designators in accordance with MIL-STD-681
with a dash separating the component wire color from
the jacket color.

Example: AWG 20, white component wire; white jacket
55A2111-20-9-9.

NOTE: Nominal values are for information only.

Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

Raychem Corporation

300 Constitution Drive, Menlo Park, California 94025

415) 361 3333 TWX 910 373 1728

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55A2111-20-9-9](#) [55A2111-22-9-9CS2275A](#) [55A2111-22-9-9CS2275](#)