
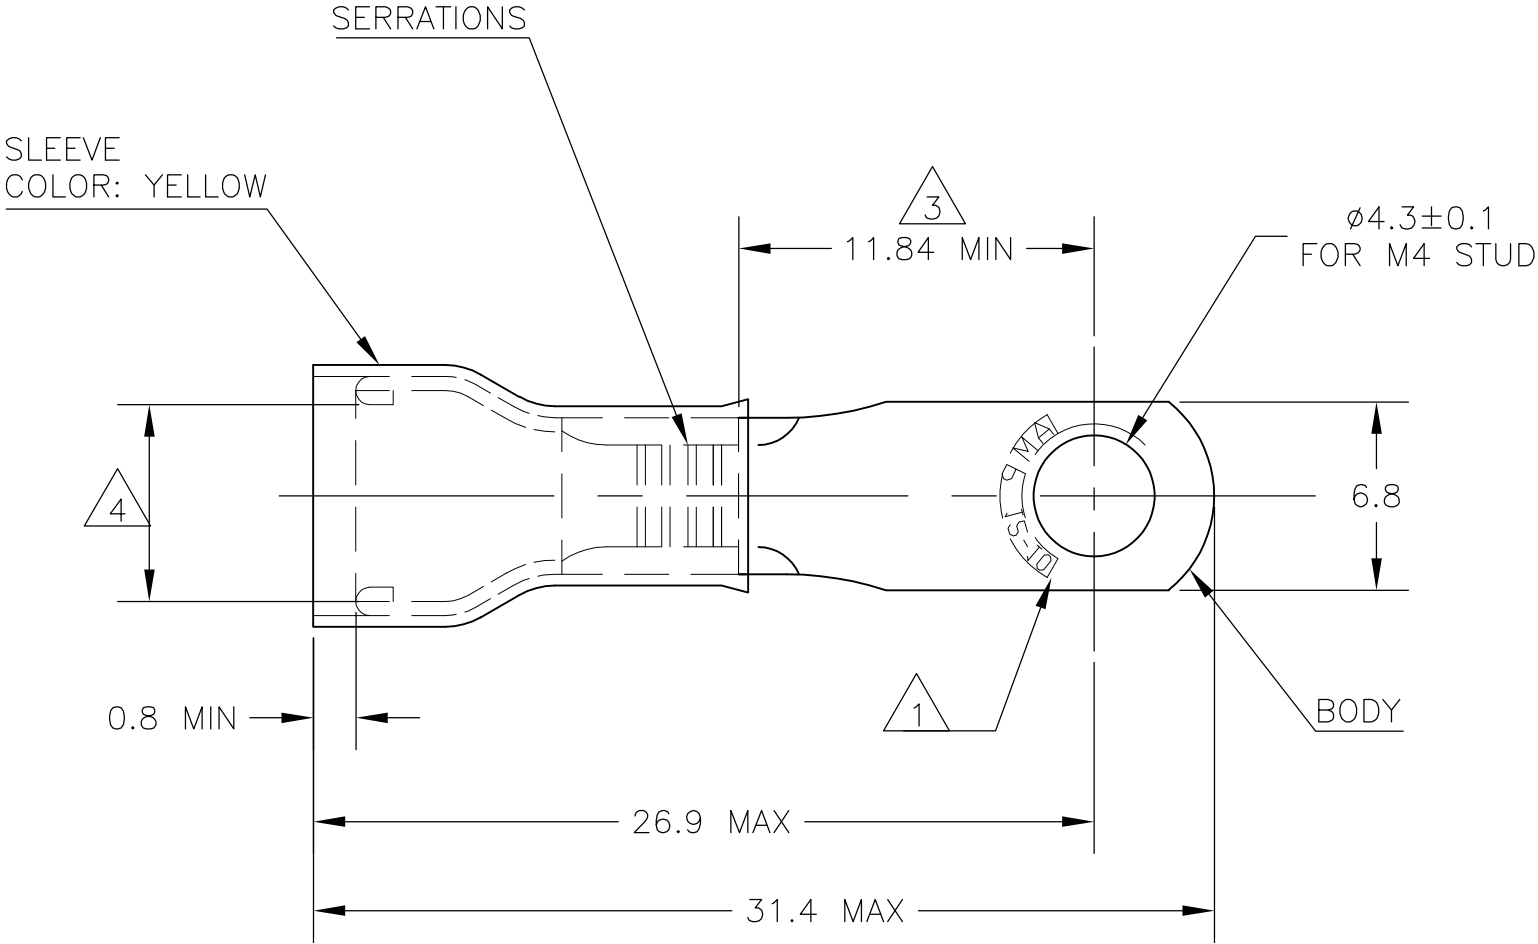


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		C4	REVISED PER ECO-14-012226	11AUG2014	NK	DR



- 1
- STAMP "AMP 12-10", LOCATION APPROX AS SHOWN.
- 2
- TONGUE THICKNESS IS 1.0±0.05.
- 3
- APPLIES TO EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 4
- WIRE INSULATION DIA RANGE 3.8-6.4
- 5
- BODY - COPPER PER ASTM B-152
SLEEVE - COPPER PER ASTM B-152
INSULATION - NYLON.
- 6
- BODY - TIN PL PER ASTM B-545
SLEEVE - TIN PL PER ASTM B-545
INSULATION - COLOR - YELLOW.
- 7
- 105°C MAX OPERATING TEMPERATURE.
- 8
- 300 VOLT MAX.
- 9
- 2.62-6.64mm² [5,180 - 13,100 CMA]
SOLID OR STRANDED.

500	LOOSE PIECE	130446
QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 11APR07		 TE Connectivity									
		CHK T MICHIELUTTI 11APR07											
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHIELUTTI 11APR07		NAME							
		0 PLC ± -		PRODUCT SPEC		TERMINAL RING TONGUE, PIDG, WIRE SIZE 12-10 —							
		1 PLC ± 0.2		—									
		2 PLC ± -		APPLICATION SPEC									
		3 PLC ± -		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		4 PLC ± -				A3		00779		C-130446		—	
		ANGLES ± 5°		WEIGHT —									
MATERIAL		FINISH		CUSTOMER DRAWING		SCALE		SHEET		REV			
						4:1		1 OF 1		C4			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[130446](#)