
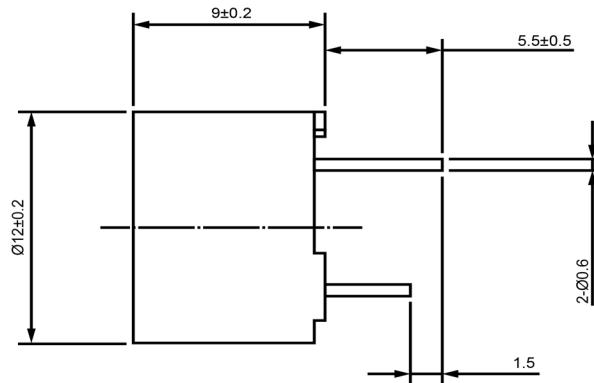
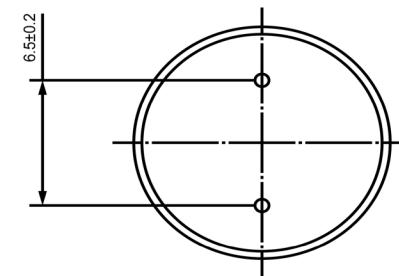


TOP VIEW**SIDE VIEW****BOTTOM VIEW****Specifications**

Description	Value	Unit
Technology	Electro-Mechanical	
Resonant Frequency	2,400	(Hz)
Rated Voltage	12	(V)
SPL @ 10cm	85	(dBA)
Coil Resistance	140	(ohm)
Mount Type	Thru Hole	
Voltage Range	6 ~ 15	(V)
Max Rated Current	40	(mA)
Housing Material	NORYL	
Operating Temperature	-30 ~ +75	°C
Storage Temperature	-40 ~ +85	°C
Weight	2	(g)

Notes

DB UNLIMITED

Electro-Mechanical Transducer

Revision History

Version	Description		Date	Approved
1	Released from Engineering		10/21/2013	J.S
Drawn by	Date	Checked by	Date	Approved by
A.B.	10/21/2013	C.E.	10/21/2013	J.S
				10/21/2013

TE122412-6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[TE122412-6](#)