

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C


D

E

F

G

H

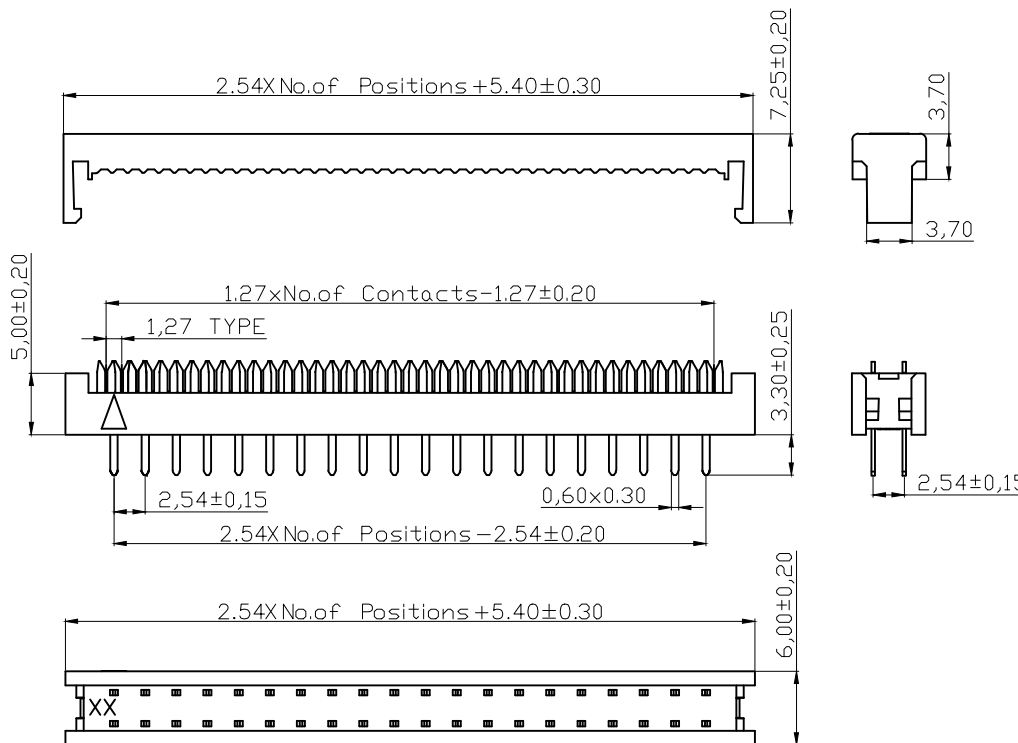

NOTES:

MATERIAL

- 1. Insulator Material: PBT+30%GF(UL94V-0), Grey
- 2. Contact Material : Brass
- ⑩ 3. Contact Plating :
 AWLP xx/3.2-T: Sn Over 50µ" Ni
 AWLP xx/3.2-T-AS: selective gold flash over 50µ"Ni


ELECTRICAL

- 1. Current Rating : 3.0AMP
- 2. Withstand Voltage : 1000V AC/DC
- 4. Contact Resistance : 20mΩ max
- 5. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- ⑧ 1. Operation Temperature: -40°C to +105°C
- 2. Waving Soldering Temperature: 245°C, 5s Max.
- 3. Packing : Tray

- ⑨ ⑤ Order Information:
 contacts xx : 06,08,10,14,16,18,20, 24,26,
 30,34,36,40,50,60,64

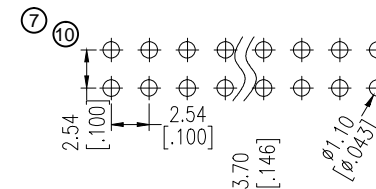

RoHS compliant
Unit: mm



| Scale | Free | ⑩ | Add the plating gold flash & tin | 25.07.2019 | Winnie | Date | Name | Customer-No. |
|-----------|-------|-----|--|------------|--------|---------------------|------------|--------------|
| TOLERANCE | | ⑨ | Delete 12P & 18P & 22P & 28P & 32P & 38P | 09.03.2019 | Xavier | Drawn | 31.07.2006 | Hellwig |
| X.X | ±0.40 | ⑧ | Add waving soldering temperature | 08.08.2017 | Ray | Approved | 25.07.2019 | Winnie |
| X.XX | ±0.25 | ⑦ | Add recommended PCB layout | 16.07.2015 | Ray | | | |
| X.XXX | ±0.15 | ⑥ | Add UL file no. | 12.12.2013 | Amy | | | |
| Angle | ±3° | ⑤ | Add multiple pin | 17.09.2013 | Winnie | | | |
| | | Id. | Modification | Date | Name | | | Drawing-No. |
| | | | | | | | | ASS 1197 CO |
| | | | | | | Replace dd 15.11.01 | | Sheet 1/1 |

1

2

3

4

5

6

7