
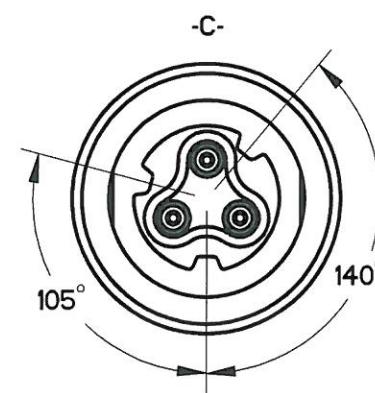
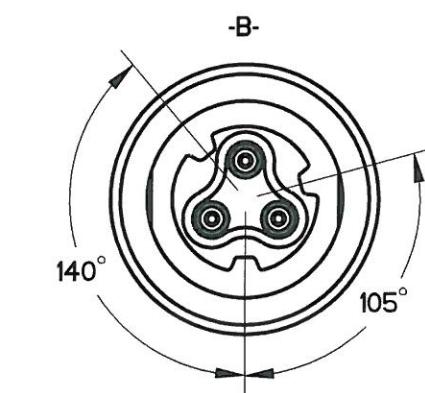
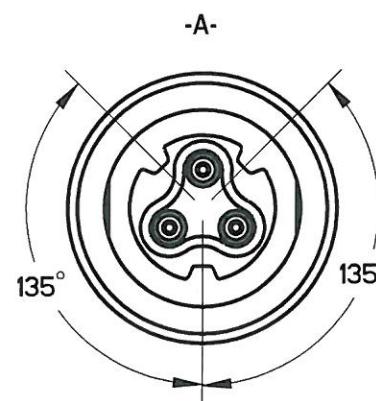
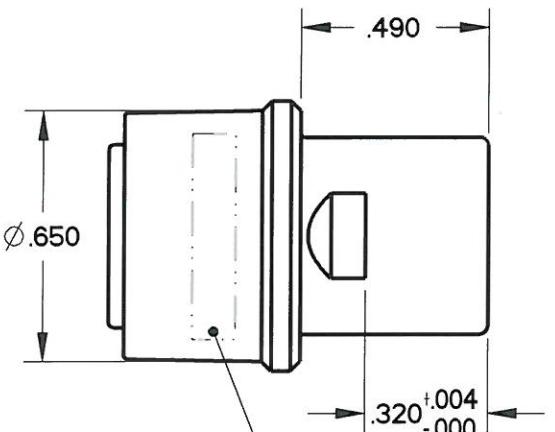
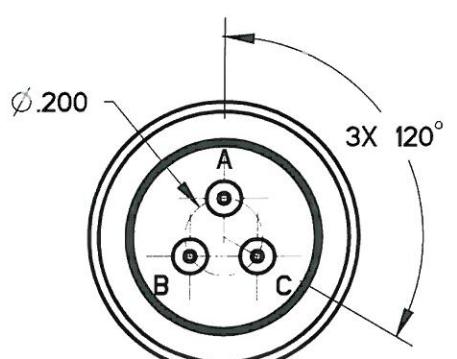


NOTES:  
 1. MATERIALS:  
 HOUSING: PA 6/6  
 CONTACT RETAINER: STAINLESS STEEL  
 GROMMET: SILICONE RUBBER PER A-A-59588  
 SEAL: SILICONE RUBBER PER A-A-59588

2. OPERATING RANGE:  
 TEMPERATURE: -55 °C TO 95 °C  
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM  
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS SEA LEVEL  
 600 VRMS @ 45,000 FT. ALTITUDE  
 CURRENT RATING: 7.5 AMPS  
 VIBRATION: PER EIA-364D METHOD 28, TEST CONDITION V.  
 3. ACCEPTS (3) M39029/58-363 PIN CONTACTs (NOT INCLUDED)  
 4. CONTACT RETENTION - 20 LBS EACH

REV	ECN	APP'D
-	5663	J. TON
A	5706	J. TON
B	5796	J. TON
C	5951	J. TON
D	6545	JT 6/25/10
E	6589	10/12/10

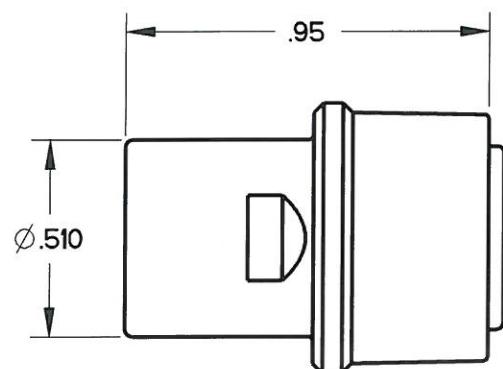

PART MARKING AS FOLLOWS:

BACC63DF0320PX APCD  
 YYWW SJS6202XX

DATE  
CODE

SEE TABLE 1 FOR FULL PART NUMBERS

KEY CONFIGURATION SEE TABLE 1

TABLE 1 - PART NUMBER SCHEME

APCD PART*	BACC PART*	KEY	COLOR
SJS620200	BACC63DF0320PA	A	RED
SJS620210	BACC63DF0320PB	B	WHITE
SJS620220	BACC63DF0320PC	C	BLUE

DIMENSIONS			TOLERANCES		PROJECTION		Amphenol Pcd		TITLE	
ANSI Y14.5M UNITS: INCHES Pro/E FILE			.XX ±0.01 .XXX ±0.005 ANGLES ±1.0°		 		SPECIFICATION DRAWING ENGR S. STONE 10/19/05		IN-LINE JUNCTION TRIPLE WIRE, SIZE 20 RECEPTACLE	
ORIGINAL			THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., BEVERLY, MA		 10/12/10  APPD 10/12/10		CHKD	DWG NO.	REV E	
							B	SJS620200	CODE: 58982 SCALE: 2:1 SHEET 1 OF 1	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SJS620220](#)