



UMT

5mmL, Wide Temperature Range

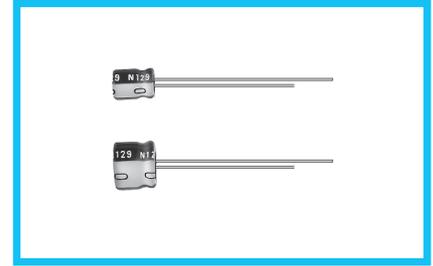


- Wide temperature range of -55 to +105°C, with 5mm height.
- Compliant to the RoHS directive (2011/65/EU).



Specifications


Item	Performance Characteristics																										
Category Temperature Range	-55 to +105°C																										
Voltage Range	4 to 50V																										
Rated Capacitance Range	1 to 100μF																										
Rated Capacitance Tolerance	±20% at 120Hz, 20°C																										
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.																										
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C																										
	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.37</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.13 (0.14)</td> <td>0.12 (0.14)</td> </tr> </table> <p>Figures in () are for φ 3 product.</p>	Rated voltage (V)	4	6.3	10	16	25	35	50	tan δ (MAX.)	0.37	0.28	0.24	0.20	0.16	0.13 (0.14)	0.12 (0.14)										
Rated voltage (V)	4	6.3	10	16	25	35	50																				
tan δ (MAX.)	0.37	0.28	0.24	0.20	0.16	0.13 (0.14)	0.12 (0.14)																				
Stability at Low Temperature	Measurement frequency : 120Hz																										
	<table border="1"> <tr> <td colspan="2">Rated voltage (V)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Impedance ratio</td> <td>Z-25°C / Z+20°C</td> <td>6</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (MAX.)</td> <td>Z-40°C / Z+20°C</td> <td>12</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated voltage (V)		4	6.3	10	16	25	35	50	Impedance ratio	Z-25°C / Z+20°C	6	3	3	2	2	2	2	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	5	4	3	3
Rated voltage (V)		4	6.3	10	16	25	35	50																			
Impedance ratio	Z-25°C / Z+20°C	6	3	3	2	2	2	2																			
ZT / Z20 (MAX.)	Z-40°C / Z+20°C	12	8	5	4	3	3	3																			
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.																										
	Capacitance change	Within ±25% of the initial capacitance value (φ 3mm unit, and ≤ 16V) Within ±20% of the initial capacitance value (≥ 25V)																									
	tan δ	200% or less than the initial specified value																									
Shelf Life	Leakage current	Less than or equal to the initial specified value																									
	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																										
Marking	Printed with white color letter on black sleeve.																										

Radial Lead Type

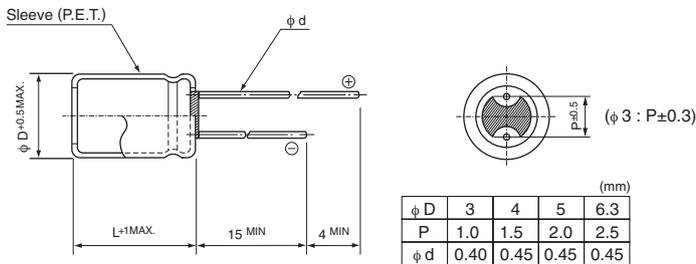

• Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 25V 10μF)

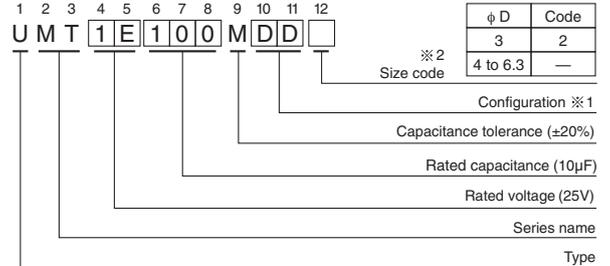

Dimensions

Cap.(μF)	Code	4		6.3		10		16		25		35		50	
		0G		0J		1A		1C		1E		1V		1H	
1	010														• 4 × 5 6.2(5.9)
2.2	2R2											3 × 5	7.5		• 4 × 5 11 (9)
3.3	3R3											• 4 × 5	11 (9)		4 × 5 14
4.7	4R7											• 4 × 5	13 (10)		4 × 5 15
10	100							• 4 × 5	18 (14)	5 × 5	23	5 × 5	25	6.3 × 5	30
22	220	4 × 5	22	4 × 5	22	5 × 5	27	5 × 5	30	6.3 × 5	38	6.3 × 5	48		
33	330	5 × 5	30	5 × 5	30	5 × 5	35	6.3 × 5	40	6.3 × 5	48				
47	470	5 × 5	36	5 × 5	36	6.3 × 5	46	6.3 × 5	50						
100	101	6.3 × 5	60	6.3 × 5	60										Case size φ D × L (mm) Rated ripple

Size φ 3 × 5 is available for capacitors marked "•"
Figures in () are for φ 3 product.

Rated ripple current (mArms) at 105°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[UMT0G101MDD](#) [UMT0J470MDD](#) [UMT1A220MDD](#) [UMT1A330MDD](#) [UMT1E220MDD](#) [UMT1E330MDD](#)
[UMT0J220MDD](#) [UMT0J330MDD](#) [UMT0G470MDD](#) [UMT0J101MDD](#) [UMT1C100MDD](#) [UMT1C220MDD](#)
[UMT1C330MDD](#) [UMT0G220MDD](#) [UMT0G330MDD](#) [UMT1A470MDD](#) [UMT1A470MDD1TE](#) [UMT1C100MCD2](#)
[UMT1E4R7MCD2](#) [UMT1E4R7MDD](#) [UMT1H010MCD2](#) [UMT1H3R3MDD](#) [UMT1H4R7MDD](#) [UMT1V2R2MCD2](#)
[UMT1V3R3MCD2](#) [UMT1V3R3MDD](#) [UMT1C470MDD](#) [UMT1E100MDD](#) [UMT1H100MDD](#) [UMT1H2R2MCD2](#)
[UMT1H2R2MDD](#) [UMT1V100MDD](#) [UMT1V220MDD](#) [UMT1H010MDD](#) [UMT1H0R1MCD2](#) [UMT1H0R1MDD](#)
[UMT1HR33MDD](#) [UMT1HR47MCD2](#) [UMT1HR47MDD](#) [UMT1HR22MCD2](#) [UMT1HR22MDD](#) [UMT1HR33MCD2](#)
[UMT1V4R7MDD](#) [UMT0J101MDD1TP](#) [UMT1HR22MCD2TP](#) [UMT0G101MDD1TP](#) [UMT1H2R2MCD2TP](#)
[UMT1HR33MCD2TP](#) [UMT1V3R3MCD2TP](#) [UMT1H0R1MCD2TP](#) [UMT0G330MDD1TP](#) [UMT1A220MDD1TP](#)
[UMT1H010MCD2TP](#) [UMT0J330MDD1TP](#) [UMT1C220MDD1TP](#) [UMT1V100MDD1TP](#) [UMT1H100MDD1TP](#)
[UMT1E220MDD1TP](#) [UMT1H4R7MDD1TP](#) [UMT1E330MDD1TP](#) [UMT0J220MDD1TP](#) [UMT1C100MDD1TP](#)
[UMT1E4R7MCD2TP](#) [UMT1E100MDD1TP](#) [UMT1V220MDD1TP](#) [UMT1H010MDD1TP](#) [UMT1C330MDD1TP](#)
[UMT1V4R7MDD1TP](#) [UMT1HR47MCD2TP](#) [UMT1C100MCD2TP](#) [UMT0G470MDD1TP](#) [UMT1A330MDD1TP](#)
[UMT1A470MDD1TP](#) [UMT1E4R7MDD1TP](#) [UMT1C470MDD1TP](#) [UMT1V2R2MCD2TP](#)