



REVERSE FIBER PATH

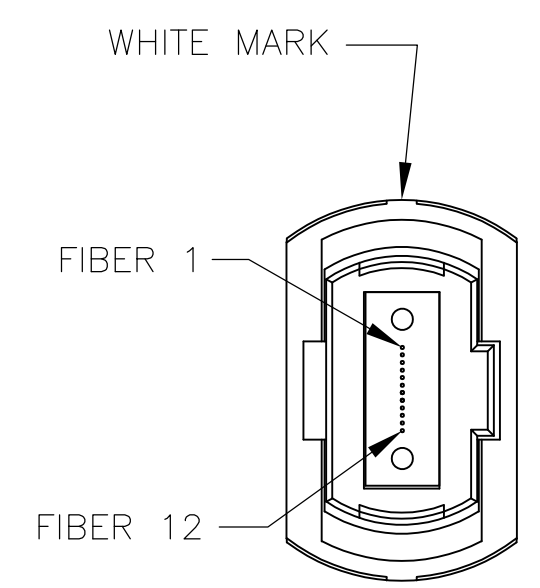

VIEW A-A
NOT TO SCALE

MTP® LEFT FIBER #		MTP® RIGHT FIBER #
1	↔	12
2	↔	11
3	↔	10
4	↔	9
5	NOT CONNECTED	8
6	NOT CONNECTED	7
7	NOT CONNECTED	6
8	NOT CONNECTED	5
9	↔	4
10	↔	3
11	↔	2
12	↔	1

MTP® CONNECTOR FIBER PATH

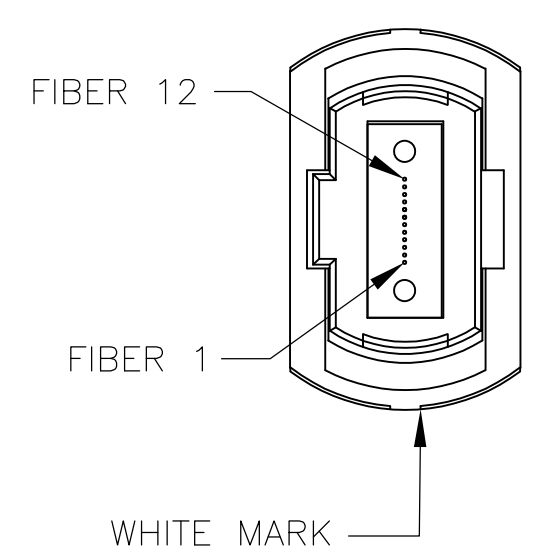

VIEW B-B
NOT TO SCALE

- NOTES:
- 1 MAXIMUM CONNECTOR INSERTION LOSS (850nm):
0.5dB + 3.5dB/km. SEE TABLE.
FIBER POSITIONS 5, 6, 7, AND 8
ARE INACTIVE AND NOT TESTED.
 - 2 STANDARD TRACE LABEL TO BE APPLIED AT BOTH ENDS.
 - 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS
OF TEC-138-702.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -

MATERIAL	-
----------	---

DWN K.GLATFELTER 15JAN2009	CHK J.BARRY 15JAN2009	APVD J.BARRY 15JAN2009
PRODUCT SPEC - APPLICATION SPEC -		
WEIGHT -		
CUSTOMER DRAWING		

TE Connectivity

CABLE ASSEMBLY, FIBER OPTIC, QSFP, OM3
3mm ROUND CABLE, OFNP, MTP®W/NO PINS,
REVERSED PATH

SIZE A2	CAGE CODE 00779	DRAWING NO C=1938323	RESTRICTED TO -
SCALE NTS			SHEET 1 OF 2
REV D			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1938323-1](#)