



FORMTEK  
 FO-52848-A  
 DRAWN  
 G J W  
 15 JUL 82  
 CHECKED  
 S J A  
 22 JUL 82  
 CHECKED  
 S J A  
 22 JUL 82  
 REVISIONS  
 C C094274  
 DLM  
 MAR 99  
 B C057041A  
 CJH  
 MAR 85  
 A C051463  
 G J W  
 15 JUL 82  
 ISSUE  
 6  
 DRAWING NUMBER  
 5  
 M  
 5SEI  
 PAGE 1 OF 1  
 RELEASE NO. SR-9672  
 REPLACES

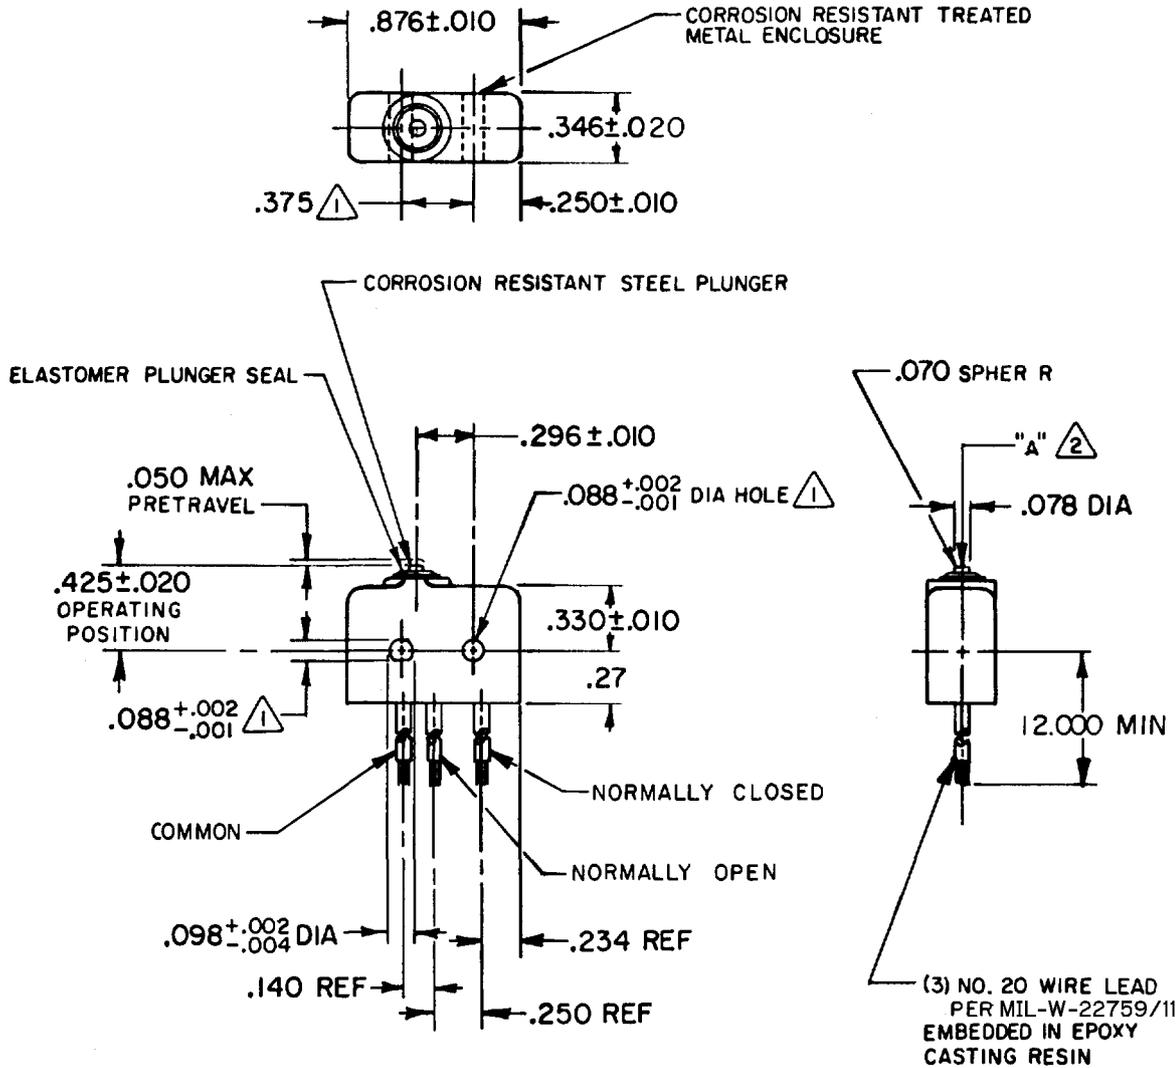

- NOTES**
- $\triangle 1$  MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375 ± .002 CENTERS
  - $\triangle 2$  ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
  - $\triangle 3$  WEIGHT OF SWITCH ONLY IS .26 OZ MAX  
 WEIGHT OF SWITCH WITH WIRE LEADS IS .65 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



**CHARACTERISTICS**

OPERATING FORCE	5-17 OZ
RELEASE FORCE	4 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.003 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT  
 S P D T

250 VAC ----- 5 AMP  
 30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	3 AMP
	50,000 FT	2.5 AMP
RESISTIVE	SEA LEVEL	5 AMP
	50,000 FT	5 AMP
MAXIMUM INRUSH		24 AMP

SCALE FULL

DO NOT SCALE PRINT

**TOLERANCES**  
 APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE  $\pm 2$

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	17.04	X X
ONE PLACE	X,X	0.4/0.018	X.X
TWO PLACES	X,X,X	0.16/0.008	X.XX
THREE PLACES	X,X,X,X		X.XXX
ANGLES			0.01/0.05
			0.36/0.15
			0.13/0.05

SI METRIC  US CUSTOMARY

DESIGN UNITS

WEIGHT  $\triangle 3$

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[5SE1-6N26](#)