


					1								
PROD 4092 CODE	LOC DF	DIST 50	P	F	REVISIONS								
					ZONE	LTR	DESCRIPTION				DATE	APPD	
			✓	✓		J	REV & REDRAWN PER DF-2629				CT	12-89	DE
						K	REV PER ECN DFK-6753				JB	4-19-93	CS

PART NO.	A DIM 	B DIM	
859331-1	48.00 [1219.2]	.38±.06 [9.65±1.52] 	OBSOLETE
859331-2	7.00 [177.8]		
859331-3	12.00 [304.8]	.38±.06 [9.65±1.52] 	
859331-4	8.00 [203.2]	.38±.06 [9.65±1.52] 	OBSOLETE
859331-5	18.00 [457.2]	.38±.06 [9.65±1.52] 	
859331-6	9.00 [228.6]	.38±.06 [9.65±1.52] 	OBSOLETE

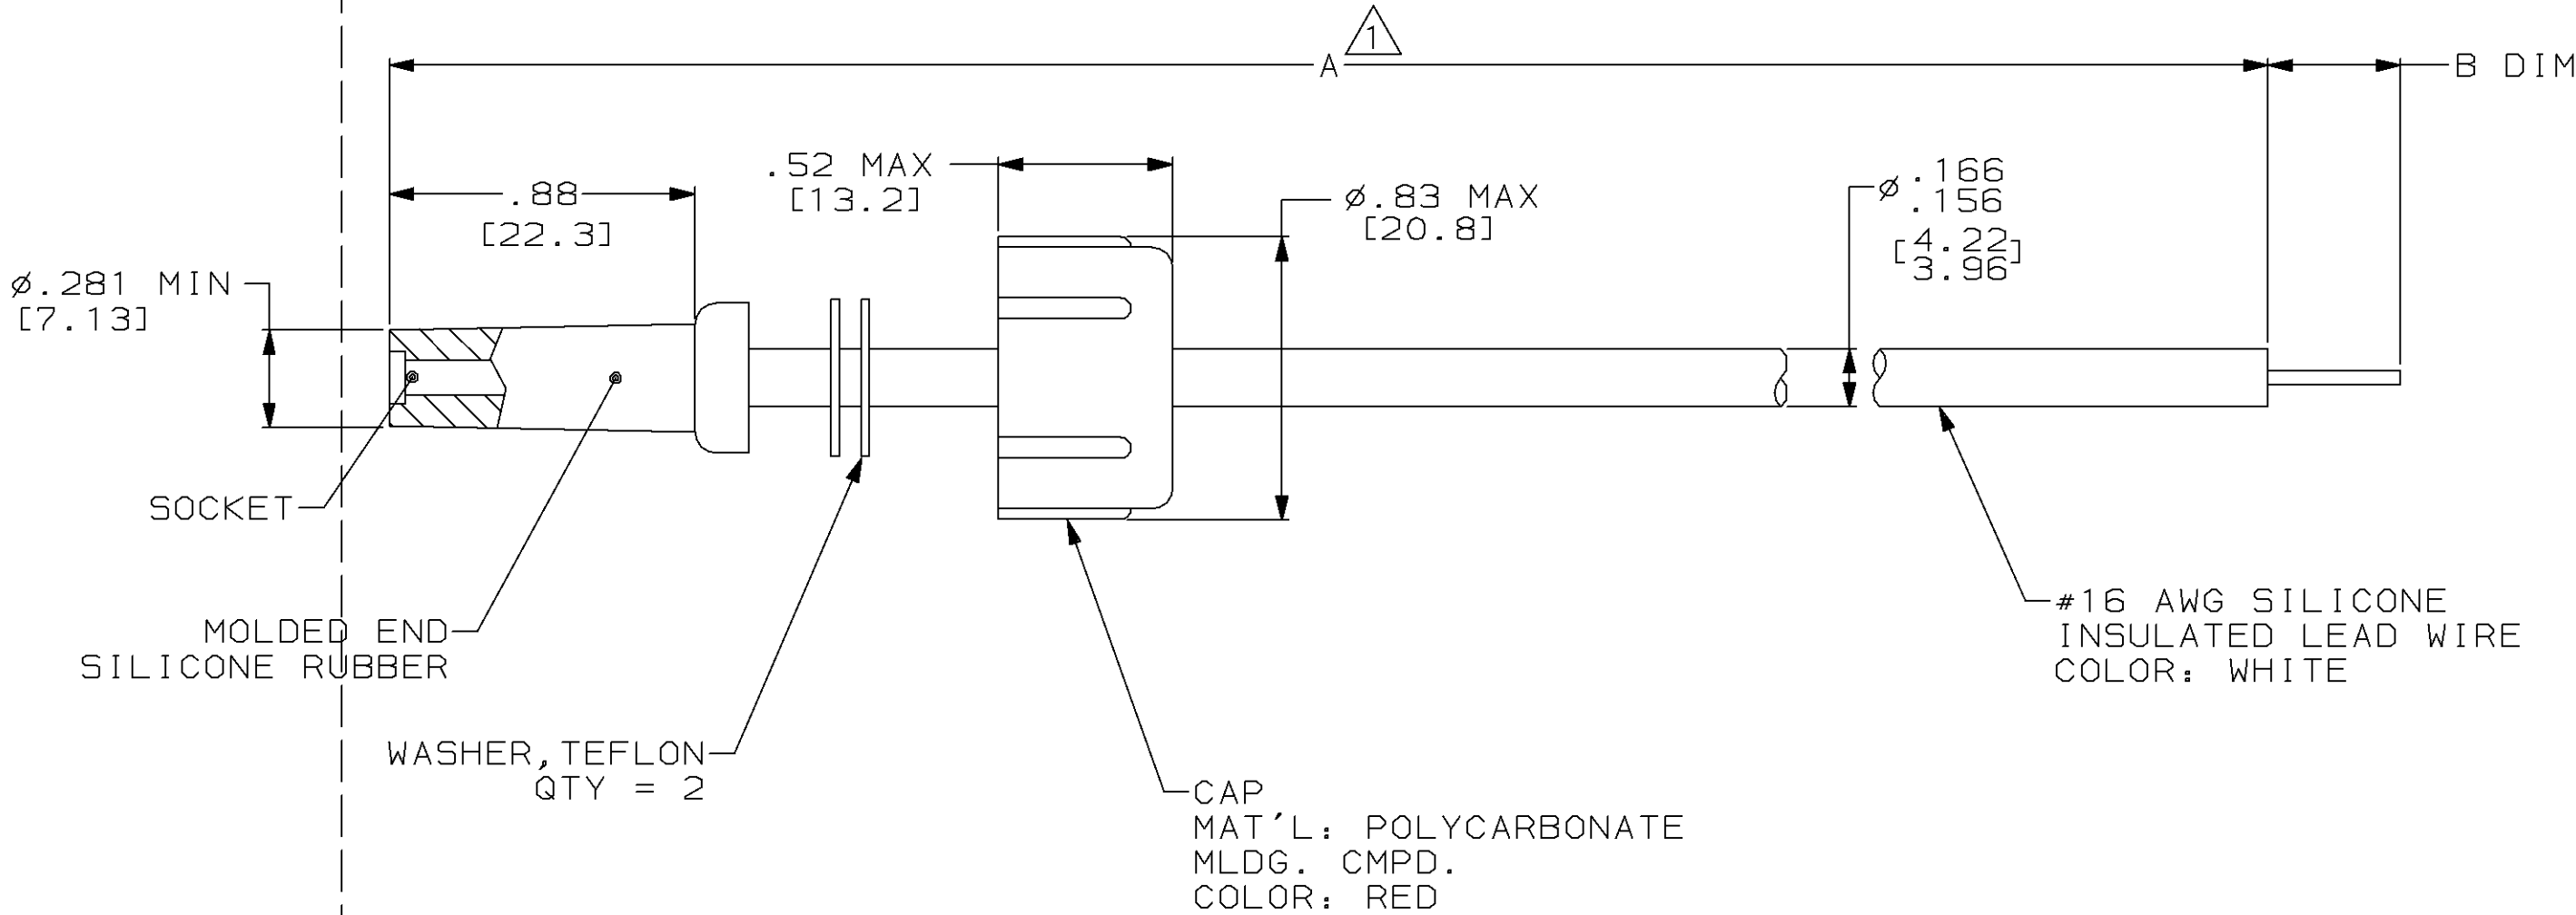

-  TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [±3.0]
24 INCHES [609.6] & UP = ±1%
-  MARKED PER MIL-STD-130.
-  TO MATE WITH AMP LGH-1
RECEPTACLE WITH .88 BARREL DEPTH.
-  OPERATING VOLTAGE: 15 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.
-  PIGTAIL IS SOLDER-DIPPED.
-  CUT INSULATION .25±.06 [6.35±1.52] FROM END WITHOUT
DAMAGING WIRE. DO NOT REMOVE INSULATION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± - ANGLES ± - MATERIAL SEE CALLOUTS FINISH -	DR 12-7-89 C.C. THOMAS	 AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK 12/8/89 D. EABY			
	APPD 12/8/89 D. EABY	NAME		
	APPD 12/8/89 D. EABY	LEAD ASS'Y, SINGLE END, LGH-1 W/REDUCED INSULATION		
	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
	-		00779	859331
	APPLICATION SPEC	SCALE	2:1	SHEET
	WEIGHT	-	-	1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[859331-2](#)